

Kenwood's TS-450S Transceivers Answer the Call

Wherever you are, whatever the situation, you can always count on Kenwood's TS-450S and TS-690S for tough, dependable performance. Products of worldfamous Kenwood engineering, these versatile HF transceivers are designed for SSB, CW, AM, FM and FSK modes of operation on all Amateur bands. including the WARC bands. To further enhance capabilities, choose the optional DSP-100 Digital Signal Processor. The AT-450 Automatic Antenna Tuner is built into the TS-450S, and is available as an internal option for the TS-690S. Along with multi-function operation and the highest levels of quality and performance, both models offer yet another advantage: ultra-compact dimensions ideal for DXpeditions and mobile use.

Enjoy all the advantages of these superior features: ■ Superior receiver dynamic range of 108dB ■ Kenwood's exclusive AIP (Advanced Intercept Point) system 
General coverage receiver ■ Automatic antenna tuner (TS-450S only) ■ Inbuilt automatic ATU option (TS-690S only) ■ Ultra-compact design ■ Excellent split frequency operation E CW pitch and CW reverse mode selection

■ Digital bar meter and multi-function LCD display ■ IF shift circuit ■ Dual-mode noise blanker (pulse or 'woodpecker') ■ 1Hz fine tuning ■ 100 memory channels ■ 100 watts output on all HF bands

■ 50 watts output on 50 to 54 MHz six metre band (TS-690S only)

HF TRANSCEIVER TS-45OS/TS-69OS

### KENWOOD ELECTRONICS AUSTRALIA PTV. LTD.

8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140 Phone (02) 746 1519, (02) 746 1888, Fax (02) 746 1509 Call now for further information and the name of your nearest authorised Kenwood dealer.

Kenwood Electronics Australia Pty Ltd only warrants products purchased from their authorised Australian dealers.

Please phone, mail or fax for in Name	
Address	
	Postcode
Publication	issue
Model	

# AMATEUR RADIO

THE WIA RADIO AMATEUR'S JOURNAL

Vol 60 No 6

ISSN 0002-6859

June 1992

Amateur Hadiois published by the Wireless Institute of Australia, ACN 004 920 745 as its Official Journal, on the last Friday of

	EDITORIAL	
Partic	W MARK	į

each month.

Bill Roper VK3ARZ Publisher Bill Rice VK3ABP Editor

Graham Thornton VK3IY
Managing Editor
Peter Gibson VK3AZL

Senior Technical Editor Evan Jarman VK3ANI Technical Editor

Gil Sones VK3AUI Technical Editors Norm Evres VK3ZEP

Ron Fisher VK3OM Bruce Kendall VK3WL Bob Tait VK3ERG

Publications Committee David Brownsey VK4AFA

Don Graham VK8HK Peter O'Connor VK4KIP Phil Steen VK4APA

Roy Watkins VK6XV
Associate Technical Editors
Vicki Gottin VK3RNK

Vicki Griffin VK3BNK Drafting Brenda Edmonds VK3KT

June Fox ADVERTISING

Margaret Allen Chris Russell VK3LCR CIRCULATION

All contributions and correspondence concerning the content of *Amateur Radio* should be forwarded to: Amateur Radio PO Box 300

PO Box 300 CAULFIELD SOUTH Vic 3162

REGISTERED OFFICE 3/105 Hawthorn Road Caulfield North Vic 3161 Telephone: (03) 528 5962 Fax: (03) 523 6191

September 10/8/92 12/8/92

Delivery of AR: If this megazine is not received by the 15th of the month of issue, and you are a linancial member of the WIA, please check with the Post Office before confacting the registered office of

Wireless Institute of Australia 1992

CONTENTS

Drew Diamond VK3XU	
Random Radiators Ron Fisher VK3OM & Ron	

General
Report to the WIA on WARC-92

Operating

Awards ...
Contests
Australasian Sprints 1992 Rules
VK Novice Contest 1992 Rules
Sunshipm State Jack Files Memorial Contest 1992 Rules

58

52

Columns

Advertisers' Index

ALARA	44
AMSAT	40
Club Comer	45
Divisional Notes	
VK2, 5/8 Wave, VK6 No	les.
QRM from VK7	47.48.49
Editor's Comment	2
Education Notes	40
EMC Report	41
FTAC Notes	41
Llamada	F4

WIA Slow Morse Transmissions ...... 56

WICEN - NSW ......45

Intruder Watch ......44

Cover

HF Predictions ...

James Brinkhoff VKTPAN aged 12 is pictured at the controls of his rig in Kolso, Northern Tasmania. Age information is not held in the office records, so we wonder itJames is the youngest-ever licensed VK amateur and full member of the WIA? Read the complete story by Don Cripps VK7AY on page 16. Photo by James' dad, Stephen Brinkhoff.

### Amateur Radio Service

A radiocommunication service for the purpose of self-training, intercommunication and technical investigation carried out by amateurs, that is, by duly authorised persons interested in radio technique solely with a personal aim and without pecuniary interest.

### Wireless Institute of Australia

The world's first and oldest National Radio Society Founded 1910

Representing the Australian Amateur Radio Service - Member of the International Amateur Radio Union

Registered Federal Office of the WIA: 3/105 Hawthorn Road, Caulfield North, Vic 3161

> All mail to: PO Box 300, Caulfield South, Vic 3162. Telephone: (03) 528 5962 Fax: (03) 523 8191

Business Hours: 9.30am to 3.00pm on weekdays

General Manager and Secretary: BIII Roper VK3ARZ

	OUNCIL	
President:	Ron Henderson	VK1RH
VK1 Federal Councillor:	Rob Apathy	VKIKRA
VK2 Federal Councillor:	Terry Ryeland	VK2UX
VK3 Federal Councillor:	Peter Maciellan	VK3BWD
VK4 Federal Councillor:	Murray Kelly	VK4AOK
VK5 Federal Councillor:	Bill Wardrop	VKSAWM
VK6 Federal Councillor:	Neil Penfold	VK6NE
VK7 Federal Councillor:	Jim Forsyth	VK7FJ

### FEDERAL CO-ORDINATORS

Amsat Awarde: Contest Manager Education: EMC: Federal Tapes: Historian: Honorary Legal Counsel MARU Int'l Travel Host Exch: Intruder Watch: QSL Manager (VK9, VK0) Standards Videotapes: WARC & CCIR

**Graham Ratcliff** VXSAGR John Kelleher VK3DE eil Penfold VK6NE Brenda Edmonds VK3K VK2AOU Hans Ruckert VK3OM John Martin VK37 K John Edmonds VK3AFU George Brzostowski VK1GB VK10k Kevin Olds Ash Nallawalle VK3CIT Gordon Loveday VKAKAL Neil Penfold VERNE Roger Harrison VK27TB John Ingham VK5KG David Wardlaw VK3ADW Leigh Baker VXXTP

## **Editor's Comment**

Bill Rice VK3ABP Editor

### Tempora Mutantur

I nos mutamur in illis. The times are changed, and we are changed with them. "This time he's really flipped," you say. "Do we need Latin tags in Amateur Radio?". Yes, you're probably right, But, on the other hand, how very true it is. And we should never forget completely that ancient language on which so much of our own is based All of this was sparked off by

looking back through the minutes of earlier Federal Conventions. There is an account of the 1992 Convention in this month's WIANEWS, beginning on the next page. I have the bound minutes of all that have been held from 1982 onwards, only 10 years ago, but a great deal has happened since. That was the year in which I first attended a Federal Convention, in my new official capacity as Chairman of FTAC. Peter Wolfenden VK3KAU was the Federal President. David Wardlaw VK3ADW the immediate Past President. and Ron Henderson VK1RH the VK1 Federal Councillor. These three people were also at this year's Convention, and Ron is our new Federal President. Brenda Edmonds VK3KT was also there in 1982 as Federal Education Co-ordinator, and Neil Penfold, then as now, was the VK6 Federal Councillor. But every other person present in 1982 was no longer involved this year. Twenty-eight different faces this time! Even at the 1985 Convention

(the first at which I was listed as Editor) there were 30 people present who are no longer in the Federal scene. The rate of turnover is rather frightening. isn't it? And yet, somehow, you still seem to be stuck with the same old Editor! Just plain "Editor", not Executive Editor, as we now have a Federal Management Group, and Executive is no more.

There is one thing which doesn't change as far as this magazine is concerned, and that is our need for a good regular supply of technical articles. We still have quite a few in the queue, but they are starting to be published faster than new articles are arriving. You have all done a marvellous job of keeping up the supply for some years now, and we're not yet by any means desperate! But if you have had the germ of a tech article lurking in the back of your mind for a while, now is the time to encourage its growth! We still have a fair supply of non-technical articles, but we do like to keep the balance somewhere near right.

By the time you read this, a two-vehicle convoy containing VK3OM and VK3ABP and XYLs should be approaching far north Queensland. We expect to be active on at least 80, 40 and 20 metres, and will be stopping overnight in such places as Longreach, Karumba and Mt Isa before crossing over into VK8, up to Darwin, and then back down to Adelaide about 11 July. Incidentally, the carburettor problem, mentioned in my April blurb, was the automatic choke. A retainer clip had disappeared. allowing the choke linkage to iam now and then in the closed position. What will the next

problem be?

WICEN.

### **WIA News**

From the WIA Executive Office

### WIA 56th Federal Convention

The 56th Federal convention of the WIA was held at the Brighton Savoy Motel over the weekend of 2nd and 3rd May 1992. The following persons attended:

Federal Councillors
Rob Apathy VK1KRA, Terry
Ryeland VK2UX, Peter
Maclellan VK3BWD, Murray
Kelly VK4AOK, Bill Wardrop
VK5AWM, Neil Penfold VK6NE,
and Jim Forsyth VK7FJ.

Alternate Federal Councillors

Note: All times are local. All frequencies Mitz.

Hugh Blemings VK1YYZ, Roger Harrison VK2ZTB, Barry Wilton VK3XV, David Jones VK4OF, and Ian Watson VK5KIA

Executive members

Peter Gamble VK3YRP (Federal President), Ron Henderson VK1RH (Vice-Chairman of Council), Kevin Olds VK1OK, David Wardlaw VK3ADW (Immediate Past President) and Bill Rice VK3ABP (Editor).

Observers John Nunan VK3IC, Peter Wolfenden VK3KAU, Clive Sait VK4ACC, Ted Doell ZL1BQA, Anne McMaster ZL3VR and Ron McMaster ZL3MQ.

Federal Office
Bill Roper (General Manager/

Secretary) and Brenda Edmonds VK3KT (Assistant Manager).

Peter Gamble opened the meeting just after 9 amon Saturday, initially in Executive mode, to deal with correspondence and reports. This was mostly routine, but one interesting item was the report by Ron Henderson on his visit to RSGB headquarters while on the way home from WARC-92.

Near midday, Executive business was adjourned until Sunday, and the meeting formally became the 56th Convention of Federal Council.

Giving his Presidential report, Peter surveyed the administrative changes and increasing responsibilities which have evolved during his four years as Federal President. He also foreshadowed his retirement from the chair. A highlight of the reports to Council was that by Ron Henderson and David Wardlaw on their participation in WARC-92. As reported elsewhere in this issue this WARC produced no significant changes in the spectrum available to the Amateur Service. At this stage Peter handed

over the chair to Ron, as business commitments required him to be elsewhere for the rest of the day, exemplifying the demands on his time which have forced his resignation from Executive.

### WIA DIVISIONS

The WIA conclists of severn autonomous State Divisions: Each member of the WIA is a member of a Division, usually their residential State or Territory, and each Division looks after amateur radio affairs within their State.

Division Address: Westly there threadcasts: 1902 Pres

Division	Address	Officers			Weekly Neve Broadcaste 1992 3.570aHz	Fems (F) \$70.00
VX1	ACT Division GPO Box 600 Cerberra ACT 2501	Precident Secretary Tressurer	Christopher David Jan Burrali Ken Ray	VKIDO VKIBR VKIKEN	2m ch 6660 Rebroadcast Mondeys 8pm 70cm ch 8626 2000 Nes Sun	(G) (S) \$56.00 (X) \$42.00
	Phone (06) 247 7506				From VK2WI at 1046 and 1916 on Sunday on the following freque modes: (*1045 ont/) 1,845 AM; 3,595 AM morning and SSB even	
VK2	NGW Division 109 Wigner St Parementa NSW	President Secretary Transumer	Roger Hantey Bob Lloyd-Jones Bob Taylor	VICEYEL VICEACE	AM"; 10.125 SSB; 24.910 SSB; 28.320 SSB; 52.120 SSB; 52.525 SSB; 147.000 FM; 438.525 FM; 1261.750 FM; On relay on behalf 18.120 SSB; 594.750 ATV Sound, Ch 35, Swiney region.	FM: 144.120
	(PO B ox 1066) Perremetta 2124) Phone (02) 689 2417 Fax (02) 603 1525	(Officer hours	Mon-Fri 1100-14 Wad 1900-2100)	00	Plus automatic relays to 2m repeators surrounding Sydney and meany country repeators. News headlines by phone (02) 552 5185 Diresonal information (02) 851 1489.	
VK3	Victorian Division	Possisions	Jim Linton	WOPC	1.840API; AM, 3.815 S88, 7.085 S88, 147.250 FM(R) MI Moondon, 147.255 FM/R) MI Base Base	(F) \$72.00 (G) (S) \$56.00
	40G Victory Boulevard Ashburton Vic 3147	Secretary Treasurer	Borry William Rob Hulley	VICERLZ	145.800 FM(R) Misses 146.700 FM (R) MT. Dandonong 438.075 FMRR) M St Leonard 1000 Ins on Sunday	(0) (5) \$56,00
	Phone (03) 885 9261	Office hours 0	136-1530 Tue & Th	<b>J</b>		
VK4	Quantum Division	Provident	John Aerese	WAGA	1,825, 3,605, 7,118, 10,135, 14,342, 18,132, 21,175, 24,970, 28,400, Metr	(F) 870.00 (G) (9) 356.00
	GPO Box 638 Brisbane Okt 4001 Phone (07) 284 9075	Secretary Treasurer	Ken Ayers David Travis	VK4KD VK4ATR	52.525 rigional 2m repeates and 1295, 100 0900 hrs Sunday Repeated on 3,505 & 147.150MHz, 1830 Monday	(X) 642.00
					1620kHz 3.550MHz, 7.095, 14.175, 28.470, 53.100, 145.000,	(F) \$70.00
VKS	South Australian Division 34 West Thebarton Rd	President Secretary	Rowland Bruce John McKeller	WISOU	147,000 FM(R) Adelaide, 146,700 FM(R) Mid North, 148,900 FM(R)	(C) (S) \$56.00
	Theberton SA 5031	Treasurer	BIII Warding	VICEAWM	South East, ATV Ch 34 579,000 Adeleide, ATV 444,250 Mg/ North Burness Valley 145,525, 438,425	(X) \$42.00
	(GPO Box 1234 Adelaide SA 5001) Phone (08) 352 3428				(NT) 3.558M 146,500, 0900 his Sunday	
VKB	West Australian Division	Pennisteral	CIII Bastis		148.700 FM(F) Perth, at 0930 his Sunday, relayed on 3,580, 7,075,	(F) \$00.75
VKB	PO Box 10	Socretary	John Ferner	VKSLZ VKSAFA	14.115, 14.175, 21.185, 28.345, 50.150, 438.825MHz. Country relays 3552, 147.350/RI Busselton 146.900/RI Mt William (Bunbury)	(C) (S) \$49.60 (X) \$32.75
	West Parth WA 6005 Phone (09) 388 3888	Treasurer	Bruce Hedland- Thomas	WEGO	147.225(R) 147.250(R) M Satdleback 146.725(R) Alberty 146.825(R) M Berlar Broadcast reposited on 146.700 at 1900 hrs	<i>"</i>
VK7	Tasmanian Division	President	Tom Allen	WOAL	145.700MHz FM (VK7RHT) at 0930 hrs Sunday relayed on 147,000	(F) \$67.00
	148 Derwent Ave Lindeferre Tea 7015	Secretary Transurer	Ted Beard Peter King	VK7EB VK7ZPK	(NKTRAA), 1461,750 (NKTRIAW), 3.570, 7.090, 14.130, 52.100, 144.100 (Hobbar), Reposited Ture 3.090 at 1930 hrs	(G) (B) \$53.65 (X) \$39.00
VKB	(Northern Territory) is part			icasta	Membership Grades Three-year member	

### REORGANISATION

After dealing with most of the reports to Council Ron asked Rob Anothu to introduce a proposal by the VK1 Division for se presentation of the WTA which was foreshadowed at the last quarterly meeting (Amatour Radio March 02 page 5) This proposal was the result of much discussion between VK1 2 and 3 and also with legal Counsel It is an attempt to remedy the cituation necessard by come Divisions that Council by delegating powerto Executive, has become less effective ("the Pyecutive tail wasging the Council doe").

The proposal does two

things:

Firstly, by simple changes to two of the Articles of Association, it abolishes the Executive in its present form:

Secondly, it wasts responsibility forthe majority of the work hitherto done by Executive in a Federal Management Group. Those members of the previous Executive who also served as directors of the WTA will cease to be directors. The only directors will be the seven Federal Councillors plus the Federal President, who is chosen by Council, but need not previously have been a Councillor.

### DOTC REPRESENTATIVES

The re-organisation debate was adjourned to deal briefly with most of the remaining reports to Council, and then to welcome to the Convention the two representatives from the Department of Transport and Communications. These were:

Ms Gwen Andrews, Ass ant Secretary and

Mr David Hunt, Director, Licensing, both from the Radiocommunications Operations Branch of the Department.

Gwen Andrews spoke first about the Parliamentary Enquiry into Management of the RF Spectrum, which was recently completed but has yet to be presented to Cabinet. She assured us that none of its recommendations need be feared by the Amateur community.

David Hunt appounced a number of changer to the man lations as part of the continuing decembrany program (These are published in this issue of Amateur Padio manazine) David stressed the importance of the input received by the DoTC from the WIA and the desire to encourage flexibility and ease of enter to the Amataux Sancica neithout inhibition the development of new techpology. He also noted the decreasing resources of the DoTC and the fact that amateur licencer make up less than 1 % of the total number of licences under control of DoTC which inevitably means that the time and recourses devoted to the Amatous Segrico are limited To these circumstances there is no place for rules which cannot be administered

The changes will probably become effective later this year, or early near year, after a period of "active consultation" with the annateur public. One very significant change is the introduction of a Novice Unnited licence class, permitting use of PM phone (only between 146 and 148 MHz) but requiring no Morse code qualification.

Many questions were addressed to Gwen and David regarding various aspects of amateur activity and administration. All were answered honestly and thoughtfully, admitting in some cases that they did not have the answer either! On that note the meeting adjourned to dinner where we were delighted that the DoTC representatives had accepted the invitation to join us. Another dinner guest was Maggie Jaquinto VK3CFI, the winner of the 1991 Ron Wilkinson Achievement Award who, on behalf of the VK3 Division received the 1991 Remembrance Day Trophy from Neil Penfold VK6NE the Federal Contest Co-ordinator.

### OTHER BUSINESS

The meeting re-opened on

Sunday again under the chair. manchin of Beter Camble in Executive mode to deal with a more of spends items. These included interestional linican examination service progress (very gratifying) reneater linking options for the future production of Amateur Padio manazine spread spectrum modes suggestions for an opening energies for the 1007 Remain brance Day Contest the Amateur Service reconcibility to nublicise the increasing number of systems contributing towards pollution of the RF spectrum and a number of more minor iteme

RE-ORGANISATION AGAIN The principal business on Sunday afternoon was again as Council to continue the debate on re-presniestion. Six agends items were involved in setting up the machinery to abolish the Executive and revise the management of the WIA. The first five mere carried unanimously with very little debate, and the sixth was withdrawn, as acceptance of the others rendered it irrelevant. One clause was added to the fourth motion empowering the General Manager to set up the new Federal Management Group to supersede Executive.

### NEW PRESIDENT, SAME COUNCIL

It was moved by VK3, seconded VK1, that the incoming Federal President should be Ron Henderson VK1RH. This was carried unanimously. Ron has been a very competent Vice-Chairman for some years, so was seen to deserve promotion to the chair! The seven Federal Councillors were unchanged, as listed earlier.

### G A TAYLOR MEDALLIONS

One of the last items agreed to before the election was that G A Taylor Medallions (the WIA's highest award short of Life Membership) should go to David Wardlaw VK3ADW, Pe-

ter Gamble VK3VPP and Wally Watking WKADO for years of service to the WIA in many capacities. Thus it was that one of Pon's first duties as Dessident was to make the awards of these medallions to the two nomi nees actually present (VK3ADW and VK3VPP) The third medallion was accepted by Murray VKAAOK on behalf of the Ougeneland Division for lates presentation to VK4DO On this hanny note the 56th Convention concluded just after 3 30 ARRE

### DXCC News Release

### ws Release

A ninteresting circular has been received from the ARRL and is being publicised in order to allow radio amateurs the opportunity to comment on matters under consideration by the ARRL DX Advisory Committee.

### New DXCC Country

 Vatican enclave of the Holy House (HV0HH) was rejected for new DXCC country status by a vote of 15 - 0.

The following are under consideration for new DXCC country status:

try status:

• Add Pratas Island (21N 117E)

- waiting further information

and a formal application. Make Ceuta and Malilla (EA9) two separate countries - based

on Rule 3, separation by another DXCC country.

The following are under con-

sideration for DXCC deleted country status;

 Spratley Is (1S) - based on no longer meeting criteria.

longer meeting criteria.

• South Sudan (ST0) - based on

no longer meeting criteria.

The following questions are under consideration:

 Should electronic confirmations be acceptable for DXCC credit?

Should separate DXCC country status for the Vienna International Centre (4U1VIC) be

reconsidered?

• What are appropriate guide-

lines and procedures for DX operations - particularly DXpeditions to rare countries? • Should contacts with stations on docked ships count for DXCC credit?

 What does the future hold for DX and DXCC?

### Further News from WARC 92

No on Henderson WK1RH, one of the WIA delegates with August at WARC 92 advises that the Canadian WARC 92 advises that the Canadian WARC 92 delegation provided a couple of conference documents on Digital Audio Broadcasting experiments they had conducted to determine the characteristics of typical systems. They had used UHF and 1.4 GPL signals including a synthesised satellite path.

By digital Audio Broadcasting or DAB we mean the digitisation of a signal as close to the source as possible and its passage in digital form to the listener's receiver. Of course compact discs are already in digital format and can be readily accepted into the system. As a matter of interest the Canadian experimental system employed a fully digital studio control panel. Perhaps it was akin to a mini telephone exchanged

to a mm tereprione exchanger By multiplexing or combining several digital signals into one composite modulating signal, a multi-channel as well as a stereo system can be obtained. This has many advantages such as multiple stereo channels from the one transmitter.

The WARC considered DAB, both in its terrestrial and satellite forms, which were seen as complementary, as a development worthy of receiving consideration in the 'carve up' of precious spectrum. It is expected terrestrial systems, possibly co-located with existing UHF TV installations, will shortly come into service to demonstrate DAB's capabilities. Those of you experienced with notdern distillation leptoners.

systems may ask how do you tune in a system which has, in practice, no background noise?

So what's in it for the amateur service? Well, the increasing availability of receivers will serve as an impetus for experimenters to build digitisers and transmit digital speech signals. No doubt the IC chip sets exist. After all the technology is not new, at least for the digital to analogue path, being included

in every CD player! How could we amateurs use a version of DAB? Perhaps to provide an audio channel in parallel with one or more data channels. No great gains for packet you might think, except for engineering and experimentation, that's true. But suppose you are a real computer buff. transferring computer files of data and software on air with a friend who has similar interests. You could conduct duplex speech liaison traffic in parallel with your data and not clog up the local repeater as is inclined to happen today.

The WIA will be examining this mode of modulation, that is broad band or high data rate signals, to ensure the Australian amateur is able to experiment with it.

### Changed Your Address or Callsign?

ost WIA members are very good about nofrie offying the Executive Office of changes to their adfresses or their call sign. The reverse side of the address label flysheet in each copy of Amateur radio magazine is designed to make this easy for you.
However, a few members re-

cently have sent in only the end section with the new details on it, and not the whole sheet, making it time consuming to work out who it has come from and what has to be changed. Please reduce the stress on the membership secretary and provide BOTH the old and the new information when advision of any

changes in your details.

### Death of ORARI President

T etters from Masayoshi Pujioka, Secretary of the IARU Region III, and David Rankin. President of the IARU Region III, announce with deep regret the unexpected death of Mr Barata YBOAY, President of ORARI, the Indonesian host society of the IARU regional conference held in Bandung during October last year. This is a sad loss to both ORARI and the IARU. The WIA extends condolences to its sister society, and the family of the deceased.

### IARU 1992 ARDF World Championships

The 6th IARU Amateur Radio Direction Finding World Championships 1992 will be held in Hungarian Amateur Radio Society, from 8th to 12th September 1992. Unfortunately this notice did not reach the WMA until two weeks after the closing date for entries to be received.

### Amateur Radio Magazine

That is your magazine to you? How does to you? How does the "average" amateur see this magazine? Is it a source of up-to-date technical information, a collection of ir-elevant trivia, light entertainment, a sales pitch, a trading centre, a contests/avards guide, a social calendar, a newsletter or a gossip column?

Surveys at various times have highlighted the vast range of expectations among readers, and a similar range of perceptions, but members are getting just about all of the above, and maybe more. Not every issue of Amateur Radio magazine includes them all, but over a few issues a wide range of interests

is satisfied. But are our readers content with the present situation?

The WTA sees the magazine as a forum for its members to contribute technical, or general interest articles, to air their views on operating techniques, regulatory procedures or published items, etc. Feedback from a range of sources confirms the high standing of Amateur Radio magazine among similar publications world wide. It is quoted from and used as a reference in many other iournals.

Despite comments recently in this column about the delay between receipt of an article and its actual publication, the Publication Committee is always pleased to receive articles or other items for consideration for publication. In the attempt to please all readers, and to produce a reasonably balanced magazine, the Editors need to have pleany of items ready for

There are some contributors who submit items frequently, but I am sure many members could manage an occasional article or story. The space distribution is based on member input and interest, in particular on responses when asked which articles and columns are read. If you are not satisfied with the present system, there are two approaches you can take.

A. Do something about it such as writing and submitting articles or comments, or encouraging others to do likewise.

B. Voice your concerns in the places where it can have some effect. There is no point in criticising the magazine on the local repeater if you are not prepared to make the effort to pass your comments direct to the Publications Committee.

As in many fields, the voices of the critics are louder than those of the supporters. But it is significant to note that, three years after the introduction of the X Grade membership, which does not include the supply of a magazine, the members taking this option comprise less than 7 % of the total membership.

Often members approach the WIA with "Why don't you...?" ideas, suggestions for special columns, articles, or reports, or general ideas on changes to the layout or emphasis. This is great. All ideas are welcome, and are discussed by the Publications Committee. But the implementation usually requires someone to do the extra work. It would be even better if the idea came equipped with the offer of action.

### **Exams Update**

s at the 30th April 1992 there were just over 300 Accredited Examiners listed with WIA Exam Service. Of these, 168 have conducted examinations on one or more occasions

It is understandable that the two figures do not tally - many examiners may intend to conduct only one examination per year, say at the end of a course, and it is possible that a number arranged accreditation to assist with club activities, or simply to be able to be kept up-to-date with procedures as time goes bv.

At times rumours are heard that the service supplied by the examiners is less than satisfactory, or that an examiner has stated that he does not intend to conduct further examinations. As WIA Exam Service is keen to keep its records up-to-date, we would appreciate being told directly of any examiners who have stated their intention not to examine, so that we can obtain confirmation from them and adjust the lists accordingly. In that way, they will not be bothered by enquiries from recruits asking for assistance or examinations.

Examiners who have not conducted an examination in the previous 18 months will be deleted from the published lists automatically, but may be reinstated on request. It is perhaps worth reminding members that remote candidates can be examined as easily as those in the suburbs. It is up to the candidate to find two acceptable supervisors - other amateurs, or persons from the categories on the published list who are prepared to administer the examination on a "onceoff" basis. For these persons, no accreditation fee is payable.

### 1991 JOTA Report

ach year the WIA receives a copy of the International Jamboree Of The Air report, compiled by the World Organisation of the Scout Movement in Geneva, The 1992 JOTA report has just been received.

It is an impressive document of 38 pages, with extracts from the reports submitted by each country, and comments on the activities involved in the 1991 IOTA held on 19-20th October 1001. The statistics show that the IOTA is still gaining strength -over 386,000 IOTA participants used 12.367 radio stations staffed by over 33,000 amateurs, with a tally of 99 countries participating.

Particularly noteworthy were the newly established scout stations from eastern-European countries, and the enthusiasm of the countries for submitting reports to Geneva. The latter of course was stimulated by a competition for the best report, a competition won by Mexico, with Australia second and Oman third. According to the figures, 21.5% of Australian scouts/guides participated, contacting 48 countries. Note was made of the satellite links provided by AUSSAT, and also various contacts with MIR.

This year, the 35th IOTA will be held over the weekend of 17 - 18th October, with the theme "Let's talk"

### ITU News

press release from the International Telecom-Inunications Union advises that:

The instrument of accession of the government of Azerbaijan has been deposited with the International Telecommunications Union (ITU) on 10th April 1992, making that country the 167th member

The accession of Azerbaijan follows that of Lithuania (12th October 1991) and Latvia (11th November 1991). The former USSR Republics of Belarus and Ukraine have both been members since 7 May 1947\*

This notice was followed a few days later by a similar announcement about Estonia becoming the 168th member of the ITIJ. Estonia is situated on the Baltic Sea. North of Latvia and bounded on the east by Russia

The ITU has also recently announced the establishment of a World Telecommunications Advisory Council, comprising senior representatives of the Telecommunications industry. The intention of the Council is for it to provide advice to the ITU on its activities and recommendations for the worldwide development of information technology, as well as raising the awareness of the importance of investment in telecommunications

### Spread Spectrum **Transmissions**

o-called "Spread Spec trum" communications modes have come to prominence in amateur radio over the past decade, although the technique, as a possible amateur mode, was mooted as early as the mid-1950s (see a OST article, "Poisson, Shannon and the Radio Amateur")

The following concise definition was supplied courtesy of Dave Horsfall, VK2KFU/ VK2SSG

As the state of the art currently stands, there are three main modes:

1. CHIRP: the transmission frequency is swent up and

- down a wide band. (Not an approved \*legal\* mode);
- 2. FREOUENCY HOPPING: the frequency "hops" to predefined (pseudo random) frequencies at high speed, staving on each frequency for less than 0.1 secs (usually much less);
- 3. DIRECT SEQUENCE ("true" spread spectrum): the transmission is modulated with a digital pseudo-random binary pattern, causing it to occupy great bandwidth. but the power in any typical "window" is below the noise

Technically, spread spectrum is a "wide-band" mode and is only permitted to amateur radio operators in Australia above 420 MHz only.

### D-I-Y Radio

T ast year Amaleur Radio magazine published a rewiew of "D-I-Y Radio", a new publication by the RSGB aimed at the beginners in amateur radio, which is published six times a year. We have recently received advice on subscription procedure. It is available to overseas subscribers for Pounds (Sterling) 12.18 per year, from DIY Radio, RSGB, Lambda House, Cranborne Road, Potters Bar, Herts EN6 3IE UK.

The March-April issue contains instructions for building a BPO, simple explanations of capacitors and wave motion, a kit review, readers letters, and other minor news items. This could be a useful publication for any beginner in radio theory.

### SEANET '92

mateur Radiomagazine last month published a ▲ small advertisement for SEANET '92, which is to be held in Darwin from 29th October to 1st November 1992. SEANET is a group of radio amateurs spread around Northem Australia and south-east Asia who hold regular skeds, and

hold an annual Convention. This year will be the first time the Convention has been held in Australia. The publicity being received at the Federal Office invites all interested parties to attend. Further information can be obtained by writing to Jim Jones, VKBIJ, Secretary, SEANET '92, PO Box 37173, Winnellie, NT 0821.

### New IARU Members

nternational voting has just agreed that the Namibian Amateur Radio League should be admitted to membership of the IARU, making a total of 128 members. There is also a proposal in circulation to admit the Chinese Taipei Amateur Radio League to membership.

### Written That Article Yet?

Ithough at the present moment the Editor of Amateur Radio magazine holds a reasonable stock of articles for future publication, it has been noted that the number of articles being received has dropped over the last few weeks. Perhaps there was a spate of writing by members over the New Year holiday period which has now dried up. Now may be the time for you to do something about that article you have always intended to write. Technical or general interest, serious or humorous, long or short will be acceptable. The Editor likes to have a variety on hand in order to be able to select by style, topic and length in the perpetual quest for a high quality, balanced magazine.

### Regulations Brochures Changes

In conjunction with the rewrite of the amateur service licence conditions, published later in this issue, the DoTC have reprinted bro-



President of the WIA, presenting a G A Taylor medal to the retiring President, Peter Gambie VK3YRP at the 1992 Federal Convention.

chures RIB 70 and RIB 72 with some minor changes recommended by the WIA.

Paragraph 31 of RB 70, which related to cross linking of rerelated to cross linking of repeaters, has been omitted from the reprint of that brochuse. Unfortunately, however, some minor errors crept in to the reprint, and Shelia Grant from the DOTC Licensing Section Publications Sub-section has asked me to publicise the following so so that you can correct your latest copy of RIB 70.

- The index still shows paragraph 31.
- Radiation Angle was omitted from Appendix E, paragraph 11.1 (d) and should be included as (vii).
   The code for the Morse Code
- The code for the Mosse Code commencing signal appearing in Appendix F should be corrected to show dahdidahdidah.
   Sheila advises that an insert

correcting these errors will be produced and inserted in the January 1992 edition of brochure RIB 70.

### RIB 72

Part 3, the CALL AND REPLY section of RIB 72, has been out of touch with amateur radio reality for many years, and has been quite misleading to new amateurs wishing to learn the correct calling procedures.

correct calling procedures. In conjunction with the WIA this section has been completely rewritten to reflect current and proper practice. The latest reprint, showing like "Revised Jan '92" note on the bottom right hand corner of the front cover, includes the new Part 3 paragraphs. This is yet another example of the WIA, representing the Australian radio amateur service, working in co-operation with the DOTE to improve the conditions and privileges for all Australian amateurs.

### Amateur or Ham

Since 1959the WIA has had a policy to actively dis courage the use of the word ham't odescribe an amateur radio operator. After taking into consideration:

- the increased use, public understanding and acceptance of the expression "ham" to denote a radio amateur within Australia, without
- within Australia, without any derogatory intent; 2. the meanings of "ham" and "amateur" in the Australian

Macquarie dictionary; and 3. the need to explain amateur radio in terms easily understood by the public and so raise their awareness of our hobby; the WIA Federal Council has

repealed that policy.

This does not mean that the

WIA is actively advocating the use of the word "ham", simply saying that it is OK if people use it when describing an amateur radio operator.

### Telephone RFI

A s many amateurs have discovered to their dismy, the new slim-line push button telephones being marketed by AOTC (formerly Telecom), are very susceptible to RFI.

Barry Wilton from the WIA

Barry Wilton from the WIA VK3 Division has been actively involved for some time in trying to find a solution to this problem, and at last Barry's endeavours have paid off.

In a letter just received, AOTC advise that they now have an EMI resistant TP200 telephone available which they believe will be adequate to solve most RFI problems encountered. Unfortunately, only limited stocks are available at present of these EMI resistant telephones. According to the new AOTC

According to the new AOTC policy, where arental telephone is suffering from RT, the customer shall have the opion of having the telephone replaced with a special Telecom TF200 telephone which is resistant to the effects of EMI (at an increased annual renal "to over the increased complexity and higher mainternance liability of this telephone".

Or, if a Telecom sale Lei-Telecom sale Lei-Telecom

Or, if a Telecom sale telephone has EMI problems within 12 months of purchase, a refund will be available. This is another example of

the WIA, representing the Australian radio amateur service, acting to improve conditions for all Australian amateurs.

Bill Roper VK3ARZ ar

# Report to the WIA on WARC-92

David Wardlaw VK3ADW Ron Henderson VK1RH

World Administrative Radio Conference 1992 or WARC-92 for short, was held in Torremolinos, Spain from 3 February to 4 March 1992. Some 1400 delegates from 120 countries met to discuss many vital radio-communications matters which will affect the world over the next few decades. The WARC was called by the International Telecommunications Union (ITU), an agency of the United Nations. The ITU regularly calls conferences concerned with the Radio Regulations. These are called Administrative Radio Conferences and their Final Acts have the status of an international treaty. In the case of WARC-92 the agenda included, amongst other things, possible changes to frequency allocations in certain parts of the spectrum. Consequently it was of interest to the amateur service.

### Preparation

◆he Administrative Council of the ITU under instructions from the Plenipotentiary Conference, the supreme body of the ITU, published the WARC-92 agenda back in June 1990. Since then the Australian authorities, DOTC, through its Australian Preparatory Group or APG of some 90 members from the Department, government and industry had been active preparing the Australian position. The APG was assisted by its five committees of specialists which met approximately monthly. The WIA was represented on four of these, the technical, frequency allocation, regulatory and HF broadcasting committees by David Wardlaw VK3ADW and Ron Henderson VK1RH.

WARC-92 was tasked to consider "fre-

quency allocations in certain parts of the

spectrum; in that way it differed from WARC-79 which was a general WARC of considerably longer duration and broader agenda. The agenda set for WARC 27 did not specifically mention annieur radio, however early in the preparation sages of however early in the preparation sages and and member societies, of which the WAI is one, became aware annieur related issues for additional Manuel Park of the WAI is one, became aware annieur related issues for additional HTP broadcasting spectrum which could have affected the 40 metre band, demands for spectrum arround 1.5, 25-30. Gitz and the likelihood of wind roll of the annieur shall be supported to Gitz and the likelihood of wind roll of the same and the same

Australia was represented at WARC-92 by a delegation 22 strong; made up of 5 DOTC officers, including the delegation leader and deputy, representatives from other government departments, CSIRO, the

telecommunications, broadcasting and television industry and the WIA.

### Amateurs at WARC-92

The LARU, being an 'exempt international organisation', had an observer team at the WARC, led by its President Dick Baldwin WIRLD. Other members of the team were Larry Price WARA, LARU Secretury, David Summer K12Z and Dan Bergeron KD4TYK, both LARU Secretariat, Wolczehowykaza SPSM, ARU Region Wolczehowykaza SPSM, ARU Region Wolczesoniany, Al Stato HKSDRU, LARU Region II President, Tom Adrias W26ZDM, LARU Region II Secretary and David Rankin 9VIRH, LARU Region III chairment

Holding accredited observer status, and not associated with any national delegation, the LaRU team were able to move about the conference and speak with delegations with a single authoritative amateur viewpoint.

In addition to the official IARII observer team there were amateur national society members on a number of delegations representing principally the amateur viewpoint. They were David Wardlaw VK3ADW and Ron Henderson VK1RH of the WIA with the Australian delegation, Ben Samsu YB0EBS of ORARI with Indonesia, Young Soon Park HL1IFM and Lee Young Ho HL1AKF of KARL with Kores, D.D. Deven 9M2DD of MARTS with Malaysia. Shoso Hara IA1AN and Masa Pujioka JM1UXU of JARL with Japan, Fred Johnson ZL2AMI of NZART with New Zealand, David Evans G3OUF of RSGB with the UK, Paul Rinaldo W4RI of ARRL with USA, Mirko Mandrino YT7MM of SRI with Yugoslavia, Marino Miceli I4SN of ARI with Italy, Ojekunie Ajayi 5N0OBA of NARS with Nigeria and Peter Hall SMOFSK and Siege Skarsfiall SM5KUX of SSA with Sweden

During the WARC the IARU placed a registration sheet in the conference foyer for all anatures present to record their names and callsigns. By the end of the conference some 100 other licensed radio annateurs signified their attendance, showing around a 10% annature presence and giving rice to the jocular expression "amateurs maña".

At this point it is worth noting all Australian members had full delegation member status, an action the DOTC is to be congratulated for implementing. Often this meant amateur members (and others) had to attend meetings and speak on behalf of Australia on matters not in their direct interest.

radars around 50, 400 and 1000 MHz.

### Conference Consuct

ITU decision making is achieved through a ponderous and lengthy process. The agenda is usually so large and wide ranging

agenda is usually so large and wide ranging that it must be broken into manageable "chunks" or related issues and processed in numerous committees and working groups, meeting in parallel. Hence the value of a large delegation with all members briefed on a wide range of issues.

WARC-92 was no exception, for it set up six committees from day 2 and they in turn set up their own working groups, ad-hoc groups and drafting groups to grapple with the agenda items.

The two committees of principal interest to the amateur service were Committee 4-Frequency Allocations and Committee 5-Regulatory Matters. Your two amateur representatives split their efforts across these with David following the frequency allocations and Ron the regulatory issues.

Also of interest was the Working Group of the Plenary which was the name given to the Technical Committee. This Committee dealt with Wind Profiler radars and was also covered by David.

All completed committee output docu-

ments were passed through an Editorial Committee to achieve consistency of ITU style and the requisite translation into the three working languages of the Union, namely Prench (the authoritative language), English and Spanish. The Editorial Committee then sponsored these output documents through two readings of Plenary to become final acts of the WARC.

In order to cover all the frequency allocation issues three committee 4 Working Groups were created, 4A for HF and proposals up to 137MHz, 4B for 137MHz to 3GHz and 4C for matters above 3GHz. Committee 5 also set up three Working Groups, however the division of its work was not as clear out as for Committee 4.

The greater part of the first three weeks of the WARC was devoted to sub-commistee meetings to hear national proposals, identify common ground and points of contention, then to resolve those differences through consensus. Many small sub groups were set up to consider specific points and report back to sub-committee.

Most meetings were conducted in six languages with speakers being simultaneously interpreted into the other five languages through wireless headsets. At the start it was cent to enter a conference in session and hear only the rustle of papers until one collected a headset and switched on to the English channel. The languages

were English, French, Spanish, Chinese, Russian and Arabic and the teams of interpreters were outstanding in their patience and workmanship.

Regular, though brief, meetings of Committees were held to review progress. This process was repeated with weekly Plenary meetings at which some nations felt the need to have their views recorded in the record despite the often somewhat redundant nature of their remarks.

By the end of the second week the committee chairmen could see the need for additional consideration time, for many nations were intent to speak at length on their national views. Indeed it felt at times the speech length was inversely proportional to the potential impact of the speaker's nation. Consequently, knowing the WARC could not be extended beyond as scheduled four weeks and two days, night and evening meeting sessions were programmed. Upon reflection, many nations were holding back and not prepared to disclose their true positions on the several conflicting frequency allocation issues. Consequently proposal papers continued to be printed and distributed until late into the conference and consensus through compromise was very late starting. Other contributing factors to this slow progress were the formation of blocks of interests: the CEPT was strong in professing consensus and compromise had already been reached in the Community and no member could back down further: the Arab and African states frequently supported each other whilst a lesser cohesion was seen from the Americas of Region I and no cohesion was apparent from South East Asia, due possibly to commercial and industrial influences from manufacturing nations in our region

The last days of the WARC were hazy in many delegates' memories. On the last Sunday evening procedural points of order were raised with the Chairman, concerned with the slow progress being made in Plenary on frequency allocations around 15 and 2.5GHz. Eventually a point of order to adjourn for the day was moved and voted in favour. The Secretary General and WARC Chairman then met with concerned heads of delegations and eventually agreed a way ahead around 4 AM. The Plenary resumed at 9.30 AM and met in continuous session, except for meal breaks and whilst awaiting papers until all issues were resolved, some say by exhaustion, at 7.32 AM the final morning. Plenary reconvened at 2 PM for acceptance of formal statements for inclusion in the Final Acts, which were then printed and issued just before a 10.30 PM formal signing and closing session. In the event the Final Acts. as distributed, contain a gap in the frequency allocations from 960MHz to 13.75GHz, together with a secretarial note that the missing portion was being reconstructed from the notes of the Secretariat, the official precis and tape recordings and would be forwarded when completed. At the Australian WARC-92 debrief to the APG in Canberra In mid March '92 the head of Delegation said a copy of the outstanding material from the Pinal Acts was on its way to him from Geneva by



The two WIA delegates to WARC '92 David Wardlaw VK3ADW and Re

Incidentally the collected papers from WARC-92, some 400 in all, are available from the ITU in electronic format on some 25 disks for around 200 Swiss francs

### The Ovinamed In reviewing WARC-92 outcomes it's

worthwhie going quickly through the whole agends, highlighting issues which did, or may in the future affect the amazeur and anateur satellite service. The amazeur satellite service has received little mention throughout this report, however with the increasing emphasis being placed upon satellite communications there are potential implications for amazeus.

### High Frequency Broadcasting High frequency broadcasting(HFBC).

despite strong pleas from broadcasting nations and equally strong resistance from principally emerging nations, gained some additional 790 kHz spread across the HF bands below 30MHz. This gain was not without concessions, for it will not be available before 2007, will need a further WARC to coordinate its introduction and must be used only for single sideband transmissions. The debate on re-allocation of spectrum to HFBC began at the higher frequency bands, where many nations felt they were able to re-allocate spectrum and worked down in frequency. By the time 10 MHz was reached opposition had stiffened considerably and the final plan, which was presented as a "take it or leave it, or all bets are off" package reallocated only 200 kHz below that point. Changes were made to broadcasting around 7MHz but many nations proposed no change to the amateur allocation. As a consequence any attempt to align the amateur band world wide was fraught with the danger that alignment might be by reducing the width of the band in Region II Having stated the 200 kHz total reallocated to HFBC below 10MHz was an absolute limit the likelihood of reallocating a further 200 kHz at 7MHz for amateurs in Regions I and III was an impossible expectation The IARU team discussed with nations sympathetic to amateurs a Recommendation the alignment of the 7MHz band be referred to a later WARC and this was accepted by the WARC and appears in the final Articles. In effect we survive to try again at a later date when the HFBC situation has stabilised and reduced the pressure for spectrum

Another HF gain was a recommendation directing nations to maintain their HF broadcasting within the designated bands. This



recently and as it was about 50 years ago. On the Spanish Costa del Sol (or Sunshine Coest) it seems rather reminiscent of how our own Queensland Gold Coest and Sunshine Coest have evolved.

recommendation should be included in amateur intruder reports to reinforce their impact.

### Mubile Existite Berrice

The Mobile Satellite Service (MSS) was a contender for spectrum around 150MHz and 1,5GHz. LEOs or Low Earth Orbit satellites were contenders for this spectrum, which amateur satellite users know is ideal for such applications. The Table of Frequency Allocations was altered around 137 and 150MHz and at selected frequency segments between 1 to 5GHz to accommodate them. The outcome for amateurs will be new neighbours at 146-149.5MHz which is to become a LEO uplink band.

### Broadcasting Satellite Service

The Broadcasting Satellite Servere Sound (ISSS)cound) is suneded to be based on digital Inoadcasting techniques, otherwise Room an Digital Andolf Droadcasting Koom and Digital Andolf Droadcasting Room and Digital Andolf Droadcasting Andolf Droadcasting service using the same strain broadcasting service using the same strain production of the production

1452-1492MHz world wide with secondary status in many countries until 2007; 2310-2360MHz in the USA, which is also secondary to the Amateur Service; and, 2535-2655MHz in some Region III countries and Russia.

Amateurs may be able to take advantage of DAB techniques in the future and combine voice and data on the same channels for DAB multiplexes many channels on the

### Future Public Land Mobile Telecommunications Survice

one bearer.

Future Public Land Mobile Telecommunications Service (FPLMTS) is a system for the future where a user with a low power hand held cellular phone can roam world wide with immediate communications. It poses questions of sovereign rights of nations, the recovery of call costs and the interconnections between its terrestrial and satellite components The WARC was of the opinion it needed further study by the CCIR but they did allocate, through a footnote spectrum in the hands 1885-2025 and 2110-2200MHz on a world wide basis Whilst these frequencies are not near any amateur allocations the technology has much amateur potential if employed in our bands.

### **High Definition Television**

High Definition Television (HDTV) is a high technology extension of television services which employ satellites and provide a significantly higher grade of picture. It is a direct satellite to user broadcast service and destarbly should have a common frequency allocation world wide. WARC however was only able to agree on an allocation to Region II in the range 173-178-GIEs and in Regions I and III 214-220Hz, commencing in the year 2001 has a wish to go into high definition ATV satellites utilising commercial HDTV stacelites utilising commercial HDTV stacelites with drown converters.

### Aeronautical Public Services WARC had before it consideration of

whate. All begines it considerations for the Aeronastical expenses yallocations for the Aeronastical phone calls from passengers aircraft in flegal phone calls from passengers aircraft in flegal phone calls from passengers aircraft in flegal to the public telephone yearsens of the work. Once again a world wide frequency allocation was highly desemble and the Wacasagreed an allocation as 1670-1675MHz aground to air, and 1800-1805MHz orgounds oil; and 1800-1805MHz of the world with the property of the world with the property of the world with the world with the world with well as the world with the world with even transceivers to permit world wide vasage.

# ELECTRONIC WORLD DISPOSALS

# NOW OPEN

For that hard to get or unusual item, give us a call. Big range of goods and components in stock.

We are interested in purchasing surplus and disposal components.

27 The Mall, cur Eastfield and Bayswater Rds South Croydon Vic 3136

Ph: (03) 723 2699

### Wind Profficer

Wind profilers are doppoler radars which determine the wind profiles at a number of altitudes. Several well separated frequencies are required to cover all heights of interest and the CCIR is already studying frequencies around 50, 400 and 1000MHz somewhat close to amateur allocations for comfort. Indeed experimental systems have been operating at 49MHz in Darwin and the 1ISA showed a preference for 449MHz, a selection which did not receive much supnort at the conference although it did avoid safety of life satellite communications around 606MHz. The WARC discussed the matter at some length and resolved to refer the matter to the CCIR for further studies before allocating frequency segments.

### The 75.8-610Hs band

Annaeurs have a linde used allocation in the Table of Prepuers, MacLeaston at 175.5-180Hz. 75.75GHz is primary annaeur whilst the remainder of the band as second-ary. A Bussian Pederation initiative for Space Research (Earth to Space) now makes that service an additional secondary service in the band. The views of experts in the field suggest the hussians will not be able to take up this allocation for some time.

One observation from WARC-92 was the increase in use of footnoises to designate a differing use for a frequency hand from the usage shown in the Table of Allocations. This happened despite the fact that the ITU has set up a Volunteer Group of Experis (VGE) to simplify the Radoo Regulations, of which the Table of Frequency Allocations is RR 8. One of particular noise was the increased use of 430-4400HTz by other than the Amsteure Service in some 64 rations.

### Regulatory Matters

On the regulatory side the Radio Regulations relating to qualifications for ships operators were revised to align them with the Safety Of Life At Sea (SOLAS) Convention. This means ships will be changing over to Global Maritime Distress and Safety System (GMDSS), a satellite based reporting system in the near future replacing the redundancy of ship bome equipment and the technically qualified maintainer-operator. The International Maritime Organisation (BMO) believes when GMDSS is fully implemented in 1999 use of morse radiotelegraphy by ships will cease after 100 years of dedicated and faithful service. The implications for the Amateur Service are we will then be the sole remaining service requiring morse proficiency for an operator's certificate and no doubt the regulatory authorities will question its relevancy.

The future of WAKDS During WARC-92 an evening was devoted to reporting and discussion by the High Level Committee (HLC), a group of people expert in ITU ways, who were tasked in 1990 to review ITU operations. The HLC proposed a number of significant changes to make the ITU more efficient whilst still remaining within its budget. One proposal. which the Secretary General has already adopted, was to schedule WARCs at more frequent intervals, but for lesser duration and with shorter agenda devoted to like issues. We are therefore likely to see WARCs every two years, with around four years notice of their agenda. This will probably cause the Australian Preparatory Group(APG) to remain continuously in session, possibly meeting half yearly, with the specific WARC preparation done by dedicated committees. The WIA will need to monitor all APG meetings and seek representation on those WARC committees which have agenda items which might affect the Amateur Service. For planning purposes we should think about having to be represented at around half these shorter WARCS. that is for fourteen to sixteen days every four years.

...

# New Date for Deferred NSW Division AGM

Sunday 28th June 1992 See VK2 notes page 47 Have you advised DoTC of your new address?

# Deregulation of Licence Conditions

For many months the WIA and the DoTC have been working together to bring about a new set of deregulated amateur licence conditions. The release of the draft of the licence conditions for public comment represents a major breakthrough in the move towards deregulation and increased self management by the Amateur Service in Australia. But what do the changes mean to the amateur community?

AIII ROBER VICAGE

mongst other things, the new licence conditions no longer distinguish between the different modes of operation. Licence conditions are now expressed in general terms which apply to all modes of operation.

A new class of licence, based on Novice theory and no CW examination, the Novice Limited is included in the conditions. These licensees will be permitted the use of 30 watts mean power, FM only, on the 146 -149 MH2 Novice hand

Power limitations for Novice and Novice Limited operators have been increased to more readily align with commonly available commercial equipment - 100 watts output on \$SB, and 30 watts on FM Combined Limited and Novice licence holders will be able to use full 400 watts power on all bands, not just those above 30 MHz.

Identification requirements have been simplified considerably. For instance, all amateur stations will now be required to transmit their own callsign only at the beginning and end of each senes of transmissions, and at ten minute intervals.

These changes will be most noticed by packet operators. The new identification requirements will allow packet networks to

be more easily established using software which is readily available overseas and which to date has been illegal to use in Australia under the current identification requirements. Also, some reneater stations

will no longer have to identify. Probably the greatest area of change in the licence conditions is in the area of repeaters. For some time now the amateur community has been moving to establish networks of reneaters, a task that was proving difficult under the current conditions The new conditions recognise the concent of a network of repeaters as an entity in its own right. Traffic between repeater network stations is seen as traffic that belongs to the network, not to the originator of the signal. This simplifies the process when, for instance, a Novice is being retransmitted. on linked reneaters.

Gone also are the current restrictions on linking of repeaters. The scope and functionality of a repeater network is only limited by the imagination of the designers of the repeater. We could now establish a network of sepeaters that you access on voice and have your signal emerge to the party you are calling as a packet message and vice versa.

The new conditions are a major advance

for the amateur service in Australia and remove many unwanted regulations. However, conditions in respect of matters such as interference are virtually unchanged. A responsible attitude on the part of ALL amateurs is necessary if the new conditions are to be a success

Although these proposed licence conditions represent a giant step along the road of deregulation, the WIA will continue to seek further privileges for Australian radio amateurs.

To help us in that regard further input from members would be most welcome

If you have any comments on the proposed changes to licence conditions, as published below, please forward them in writing to Mr. D. Hunt, Director Licensing. PO Box 594, GPO Canberra ACT 2601, to reach him no later than 17th July 1992. Please also forward a copy of your comments to DoTC to the WIA at PO Box 300 Caulfield South VIC 3162

The DoTC news release follows:

# PROPOSED

LICENCE AND TECHNICAL CONDITIONS TO BE ATTACHED TO AMATEUR STATION LICENCES

### PANT I - GENERAL

The Amateur Service in Australia is authorised under the Radiocommunications Act 1983, the Radiocommunications Certificate of Proficiency Regulations and the Radiocommunications (Licensing and General) Regulations

All Iscensees are required by law to abide by the licence conditions for the Amateur Service specified in this attachment.

An applicant for a licence must have achieved a satisfactory result in an Amateur Operators Examination in accordance with the Radiocommunications (Certificate of Proficiency) Regulations before an Amateur station licence can be issued

The following are the licence conditions for Australian Amateur Stations including Beacon, Repeater, and Translator stations This attachment incorporates conditions prescribed in the International Telecommunications Regulations, Radio communications Act 1983, and the Radiocommunications (Licensing and General) Regulations.

### PART # LICENCE CONDITIONS Floence

1. One licence is required for each Amateur Station

Change of Address 2. Permanent change of address must be notified in writing, within two weeks, to any Departmental office in your State or Territory.

### Use of Amateur Stations 3 The Licensee of an amateur station must

use the station solely for the purposes of self training, intercommunications of a personal nature and investigation into radiocommunications. Activities considered not to be included in communications of this nature would be the use of the station for (a) financial gain:

- (b) transmission of any form of entertainment including (i) music - (except music incidental to
  - training videos and tapes); (ii) aural or visual amusement (iii)video or radio broadcast programs:
- (iv) advertisement material. (c) transmission of material relating to in-
- dustrial, commercial, political, or religious matters; and (d) re transmission of another amateur sta-
- tion's transmissions without that station's consent Communications by Amateur Stations 4. The licensee of an amateur station must
- abide by the provisions set out in Article 32 of the International Radio Regulations (refer Appendix B). Third Party Traffic

- 5. Subject to the provisions set out in the International Radio Regulations, Third Party Traffic is permitted
- Note. Australia has Third Party Traffic agreements with Canada, Honduras, Israel, Solomon Islands and the Unned States of America 6. Except in the event of a natural disaster
- or as authorised by the Minister, the beensee of an amateur station must not solicit for Third Party Traffic. Display of Station Licence

### 7. The amateur station licence and/or the

operators Certificate of Proficiency must be made available on the request of an authorised officer of the Department of Transport and Communications. Control of Station

### 8. The licensee of an amateur station must have direct control of all operations of the station at all times (unattended re-

- peater and beacon stations excepted). The licensee of an amateur station must ensure adequate security measures are taken to prevent operation of the station by unauthorised persons.
- 10 A qualified operator, if permitting an

- unqualified person to transmit from the station, shall be responsible for the supervision and control of all operations of the station, including station identification in the prescribed manner at the beginning and end of each series of transmissions.
- 13. The licensee, if permitting another qualified operator to operate the station in his/her absence, must do so in writing, Uncertainted Stations
- 12. The licensee of an amateur station, if
- operating the station unattended, must ensure that:
  - (a) the transmitter is fitted with a device to cause automatic shut-down in the event of a fault causing unintentional continuous transmission for a period exceeding 10 minutes dura-
    - (b) prompt termination of transmissions is able to be effected in the event that interference is caused to other services

### Identification of Stations 13. The licensee of an amateur station must

tion; and

- not, except for brief tests and adjustments, cause a transmission to be emitted from the station transmitter(s) on any frequency unless identified 14.. The licensee of an amateur station must
- transmit his/her own callsign at the beginning and end of each series of transmissions and at least every 10 minutes during a series of transmissions. Pixed frequency, fixed location amateur repeater stations do not have to identify. 15. The call sign must be transmitted either
- by voice, visual image or an internationally recognised code. Interference

- 16. The licensee of an amateur station must take such measures as are reasonably practicable to erect, fix, place and use the transmitter(s) in such a manner as to avoid interference to the efficient and convenient working of other stations.
- 17 The licensee of an amateur station must comply with any written directions given by an authorised officer of the Department of Transport and Communications in relation to
  - (a) the installation and maintenance of a station or service, and
- (b) any accessory apparatus used, or to be used, in the operation of the station or service as are reasonably necessary for the opera-

tion of that station or service so as to avoid interference to radiocommunications

### Club Stations

- 18. Club stations may be operated only in the presence of a qualified operator and in accordance with the qualifications of the operator supervising all operations. A log book recording all use of the station must be kept with identification of the operator supervising the transmissions clearly indicated.
- 19. A club station must not be operated at other than the address shown on the licence without prior notification to the Department of Transport and Communucations. Frequencies
- 20. The licensee of an amateur station must only transmit-(a) on frequencies within the band limits, specified in Appendix D, under
- the column heading of the class of station licence; and (b) in accordance with the footnotes to
- Appendix D Emissions Note. Explanations of Emission designa-
- tions appear in Appendix F. 21. The licensee of an amateur station (Novice Limited) must only use emission mode
- 16K0F3E 22. The licensee of an amateur station (Novice ) must only use the following emis-
- sion modes (a) when operating on bands below 30 MHz. 200HA1A, 8K00A3E, 4K00H3E, 4K00R3E, 8K00B8E/B8W
- and 4K00I3E (b) when operating in the 146-148 MHz band: 16K0F3E 23. When operating on bands below 30
- MHz, the licensee of an amateur station (Combined Limited and Novice) must only use the following emission modes: 200HA1A, 8K00A3E, 4K00H3E, 4K00R3E, 8K00B8E/B8W and 4K00J3E 24. When operating on bands below 30
- MHz, the licensee of an amateur station (Unrestricted) must only use the following emission modes 200HA1A/A1B. 6K00A2A/A2B/A2D.
- SKOOA3E. 4K00A3EKN\*, 4K00R3E, 2KOOR3EKN\*. 4KOOI3E. 2KOOI3EKN\*. 4K00H3E, 2K00H3EKN\*, 8K00B8E/B8W. 6K00A3C, 3K00R3C/J3C/H3C, 6K00A3F, 3K00I3F, 1K12F1A/F1B/F1D, 6K00F3E/ G3E, 16K0F3E\*\*, 6K00F2B/G2B/G2D/F2A/ G2A/F2D, 6K00F3C/G3C, 6K00F3F/G3F Note 1. Use of the emission modes designated with " is limited to Narrow Band
- Voice Modulation (NBVM) Note 2. Use of the emission mode design nated with 'ee' is limited to the bands
- above 28 MHz. Note 3. The bandwidths shown in the above emissions are the maximum permitted
- values. Amateur stations may use lesser bandwidths if so desired 25. The licensee of an amateur station (Lim-

rted), an amateur station (Combined Limited and Novice), or an amateur station (Unrestricted), operating on bands above 50 MHz may employ any emission mode but must ensure that:

- (a) widehand television, spread spectrum or pulse emission modes are used only on bands above 420 MHz:
- (b) the emission made in use does not-(i) cause interference to primary/secondary radiocommunications services utilisms the same band(s); or
- (ii) inhibit other amateur stations from using the band(s)

### 26. The licensee of an-

- (a) amateur station (Unrestricted): (b) amateur station (Limited); or
- (c) amateur station (Combined Limited and Novice)

must ensure that the station's output power does not exceed that indicated in column 2 in the same row for the type of emission(s) detailed in column 1 of Table 1.

### Table 1 Column 1

Column 2

Column 2

Single Sideband Voice (J2E, R3E) Vestigial/Sideband Television 400 watts oX 120 watts pY All other emission modes Note. Refer to Appendix D for approved frequency

27. The icensee of an amateur station (Novice) must ensure that the station's outout power does not exceed that indicated in column 2 in the same row for the type of emission(s) detailed in column 1 of Table 2

### Table 2

Column 1

Single Sideband Voice (J3E, R3E) 100 watts pX All other emission modes 30 watts oY Note, Refer to Appendix D for approved frequency

28. The licensee of an amateur station (Novice Limited) must ensure that the station's output power does not exceed 30 watts pY.

### Beacon Stations

29 Amateur beacon stations shall conform to the general provisions outlined in these licence conditions

### Repeater/Translator Stations

30 Amateur repeater and translator stations shall conform to the general provisions outlined in these licence conditions

31 Repeater and translator station's may be linked to form a network(s) of repeaters or translators

### Note

Where a tone access system is used to control the linking of reneater or translator stations, the parameters for these tone access methods are set out in Appendix E.

### APPENDIX A

TERMS AND DEFINITIONS For the purposes of these licence conditions the following terms and definitions apply.

Amateur Service A radiocommunication service for the purpose of self-training, intercommunication and technical investigations carried out by amateurs, that is, by duly authorised persons interested in radio lechnique solely with a personal aim and without pecuniary

### Amaleur Sainlilin Service munication service using space stations

on earth satellites for the same purpose as those of the amateur service. Assesser Mailton means a stalion -

(a) that employs, for radiocommunication, any transpency included in the frequencies designated in the frequency table as a frequency for use by an amateur service; and

(b) that is used without financial gain and solely for the purpose of self training, intercommunication and investigations into radiocommunications

Authorized Officer

means an officer of the Department of Transport and Communications who has been authorised by the Minister for the nurposes of that provision Club Station

means a station in the amateur service for which a licence is held by a group of persons such as a school, college, institute, radio club or similar. 'pX' (Peak Envelope Pewer - Watts)

means the average power supplied to the antenna transmission line by a transmitter during one radio frequency cycle at the crest of the modulation envelooe taken under normal operating conditions 'pY' (Mean Power - Watts)

means the average power supplied to the antenny transmission line by a transmitter during an interval of time sufficiently long compared with the lowest. frequency encountered in the modulation taken under normal operating conditions. Oualified Operator

means a person holding a certificate of proficiency issued in accordance with the provisions of the Radiocommunications Act 1983

Repealer/Translator Station includes a station in the amateur service used for the automatic reception and re transmission of signals.

Repealer Hebrerk includes a system of two or more amateur repeater stations knked together for the automatic reception and re transmission of signals. Traffic within the network is traffic of the network, not the stations

accessing the network and, except in the case of portable/mobile repeater stations, does not need to be secarately identified Third Party Traffic

in relation to the communications between amateur stations means messages passed on behalf of any

other person who is not a qualified amateur operator Subject to the laws of another country, amateur to ateur communications are not considered to be Third Party Traffic.

### APPENDIX I ABTICLE SZ | WTERWATIONAL REGULATIONAL Section I

Amateur Service Radiocommunications between amateur stations of different countries shall be forbidden if the adminstration of one of the countries concerned has notified that it objects to such radiocommunications.

(1) When transmissions between amateur stas of different countries are permitted, they tions of different countries are permitted, very shall be made in plain language and shall be limited to messages of a technical eature relat-ing to tests and to remarks of a personal charac-ter for which, by reason of their unimportance, recourse to the public telecommunications service is not justified. (2) It is absolutely forbuilden for amateur sta-

tions to be used for transmitting interna-tional communications on behalf of third (3) The preceding provisions may be modified

by special arrangements between adminis-trations of the countries concerned (1) Any person seeking a licence to operate the

agnaratus of an amateur station shall prove that he is able to send correctly by hand and to receive correctly by ear, texts in Morse code signals. The administrations concerned may, however, waive this requirement in the case of stations making use exclusively of frequencies ahove 30 MHz (2) Administrations shall take such

measures as they judge necessary to venfy the operational and technical qualifications of any person wishing to operate the apparatus of an amateur station 4. The maximum power of amateur stations shall

be fixed by the administrations concerned, havoperators and to the conditions under which these stations are to operate (1) All the general rules of the Convention and

of these regulations shall apply to amateur sta-tions. In particular, the emitted frequency shall be as stable and as free from spurious emissions as the state of technical development for such stations permits.
(2) During the course of their transmissions, amateur stations shall transmit

their call sion at short intervals. Indian I Amateur-Satellite Senace

The provisions of section I of this Article shall apply equally, as appropriate, to the amateur-satellite service.

7. Space stations in the amateur-satellite service operating in bands shared with other services shall be fitted with appropriate devices for controlling emissions in the event that harmful interference is reported in accordance with the procedure laid down in Article 22. Administrations authorising such space stations shall inform the IFRB and shall ensure that sufficient earth command stations are established before faunch to guarantee that any harmful interference which might be reported can be terminated by the authorising administration.

### EXTRACT FROM THE RADIOCOMMUNICATIONS Conditions to which transmitter licence is subject.

25 (1) A licence to operate and possess a radiocommunications transmitter is subject to

the following conditions:

(a) a condition that the holder of the licence shall not operate, or permit the operation of, the transmitter except for a purpose specified in the licence, being a purpose not

inconsistent with a purpose of a kind speci-fied in the appropriate frequency band plan under sub-section 19(2) (b) a condition that the holder of the licence shall not operate, or permit the operation of the transmitter except in accordance with

provisions specified in the licence, being provisions relating to-(i) the prevention or reduction of interference. or of the likelihood of interference, to

radiocommunications, (ii) the prevention or reduction of risk of death of, or mury to, persons, or risk of loss of, or damage to, property; or (iii) the transmission of an identification signal; (c) a condition that the holder of the licence shall not operate, or permit the operation of, the transmitter except on a frequency or frequencies or on a frequency channel, and at a constancy, specified in the licence;

at a constancy, specified in the licence; (d) a condition that the holder of the licence shall not operate, or permit the operation of, the transmitter in such a manner as would be likely to cause reasonable persons, iustifiably in all the circumstances, to be seriously alarmed or seriously affronted, or lor the numoses of harasson a person.

the purposes of harassing a person;

(e) a condition that the holder of the licence shall not operate the transmitter unless he is a qualified operator in relation to the licence:

(f) a condition that the holder of the licence shall comply with sub-section 269A(2) of the Navigation Act 1912; NOTE. 269A(2) A person in charge of a

OTE. 269A(2) A person in charge of a radiocommunications transmitter that is within the jurisdiction of the Commonwealth (includ-

the jurisdiction of the Commonwealth (including a transmitter in a Territory) or that is operated by virtue of a transmitter licence or a temporary permit granted under the diminiscentimizations Act 1983, shall on recaving the prescribed salety signal, retrain from sanding messages for a time sufficient to allow other stations to receive the message, and to required by the Minister, shall transmit the information as the manner directed by him.

(g) a condition that the holder of the licence shall comply with any direction with respect to the operation of the transmitter given to him, in a manner not inconsistent with any relevant guidelines in force under sub-section (4), either orally or in writing, byin a member of the Australian Federal Police;

a member of the police force of a State or Territory;
 an officer of the Defence Force;
 an officer of the Australian Coastal Surveiller;

Ince Centre; or (v) an officer included in a prescribed class of officers, being an officer of a prescribed organisation the sole or principal purpose of which is to deal with natural disasters, that is reasonably necessary for the purpose of-

(vi) securing the safety of a vessel of arroraft

that is in danger;
(will) dealing with an emergency involving a serious threat to the environment; or (will) dealing with an emergency involving risk of death of, or injury to, persons or risk of substantial loss of, or substantial damage

to, property;
(h) a condition that the holder of the licence shall comply with the provisions of this Act;

such conditions (if any) as are prescribed;
 such other conditions (if any) as are specified in the licence.

Continuousing conditions of transmitter licences

27. A person who, without a reasonable excuse, contravenes a condition of a transmitter licence is guilty of an offence punishable on conviction by a line not exceeding \$1,000.

Repeaters - additions, deletions, alterations. Have you advised the WIA of changes needed to the repeater list?

APPENDIX D Amaleur Station (Unres	iricted)	Astaleur Stat	ion (Limited)	Amaleur Station (Hovice)			
requency	Notes	Frequency	Heles	Frequency	Holes	Frequency	Notes
.800 - 1.825 MHz	743.470	50 - 52 MHz 52 - 54 MHz	(A) (F)	3.525 - 3.625 MHz 21.125 - 21.200 MHz	(0)	119.98 - 120.02 GHz 142.00- 144.00 GHz	(A) (G)
.825 - 1.875 MHz	(A) (B)			21.125 - 21.200 MHz 28.100 - 28.600 MHz	(G)		
1.500 - 3.700 MHz 1.794 - 3.800 MHz	141 180	144 - 146 MHz 146 - 148 MHz	(G)	28.100 - 28.600 MHz 146.000 - 148.000 MHz	(G)	144 00 - 149.00 GHz 241 00 - 248.00 GHz	(A) (G) (A) (E) (
1.794 - 3.800 MHz	(A) (C) (G)	420 - 435 MHz	(A)	148.000 - 146.000 MITZ		248.00 - 250.00 GHz	(A) (C)
.100 - 7.100 MHz	(A)	435 - 438 MHz	(A) (G)	Amaleur Station (Combine		290.00 ° 250.00 anz	(4)
0.100 - 7.300 MHz	(A) (D)	438 - 450 MHz	(A) (b)	Limited and Hovice)	98	Amateur Station (Novice	f Imited
4.000 - 14.250 MHz	(G)	1240 - 1260 MHz	(A)	Frequency	Notes	Frequency	LIIHHBU)
4.250 - 14.350 MHz	(0)	1260 - 1270 MHz	(A) (G)	3.525 - 3.625 MHz		148 - 148 MHz	
8.068 • 18.168 MHz	(G)	1270 - 1270 MHz	(A) (a)	21.125 - 21.200 MHz	(G)	FOOTWOTES	
1.000 - 10.100 MHz	(G)	2300 - 2400 MHz	(A)	28.100 - 28.600 MHz	(G)	A The Amateur Service is	n allonated
4.890 - 24.990 MHz	(G)	2400 - 2450 MHz	(A) (E)(G)	50 - 52 MHz	(A) (F)	a secondary (non-inter	
8.000 - 29.700 MHz	(G)	3.300 - 3.400 GHz	(A) (L)(O)	52 - 54 MHz		basis in this band.	
0 - 52 MHz	(A) (F)	3.400 - 3.410 GHz	(A) (G)	144 - 146 MHz	(G)	B Amateur licensees sha	
2 - 54 MHz	(A) (L)	3.410 - 3.600 GHz	(A) (a)	146 - 148 MHz		operation within +/- 4   MHz	KHZ 01 1.8
44 - 146 MHz	(G)	5.650 - 5.670 GHz	(A) (G)	420 - 435 MHz	(A)	C Amateur licensees sha	Nioue II
46 - 148 MHz	(0)	5.670 - 5.725 GHz	(A) (Q)	435 - 438 MHz	(A) (G)	operation within + 1 ki	
.870 - 5.725 GHz	(A)	5.670 - 5.725 GHz	(A)	438 - 450 MHz	(A)	MHz	
.725 - 5.830 GHz	(A) (E)	5.670 - 5.725 GHz	(A)	1240 - 1260 MHz	(A)	D Amateur licensees sha operation within +/- 4	
.830 - 5.850 GHz	(A) (E) (G)	5.725 - 5.830 GHz	(A) (E)	1260 - 1270 MHz	(A) (G)	10.1415 MHz	MIZ UI
0.00 - 10.45 GHz	(A)	5 830 - 5 850 GHz	(A) (E)(G)	1270 - 1300 MHz	(A)	E Amateur licensees usin	no this bar
0.45 - 10.50 GHz	(A) (G)	10.0 - 10.45 GHz	(A)	2300 - 2400 MHz	(A)	must accept any harmi	ful interfer
4.00 - 24.05 GHz	(E) (G)	10.45 - 10.50 GHz	(A) (G)	2400 - 2450 MHz	(A) (E) (G)	ence that may be expe- industrial. Scientific or	
4.05 - 24.25 GHz	(A) (E)	24.00 - 24.05 GHz	(E) (G)	3.300 - 3.400 GHz	(A)	(ISM) equipment open	
7.00 - 47.20 GHz	(G)	24.05 - 24.25 GHz	(A) (E)	3.400 - 3.410 GHz	(A) (G)	band.	
5.50 - 76.00 GHz	(G)	47.00 - 47.20 GHz	(6)	3.410 - 3.600 GHz	(A)	F Arnateur stations are p	ermitted t
6.00 - 81 00 GHz	(A) (G)	75.50 - 76.00 GHz	(G)	5.650 - 5.670 GHz	(A) (G)	operate within this ban the following condition	na subject
19.96 - 120.02 GHz	(A)	76.00 - 81 0 GHz	(A) (G)	5.670 - 5.725 GHz	(A)	(i) No interference is caus	
42.00 - 144.00 GHz	(G)	119.98 - 120.02 GHz	(A)-	5.725 - 5.830 GHz	(A) (E)	reception of channel 0	
44.00 - 149.00 GHz	(A) (G)	142.00- 144.00 GHz	(G)	5 830 - 5 850 GHz	(4) (5) (6)	SIONS,	
41 00 - 248 00 GHz	(A) (E) (G)	144.00 - 149.00 GHz	(A) (G)	0.000 0.000 dr E.	(A) (E) (G)		
18.00 - 250.00 GHz	(G)	241.08 - 248.00 GHz	(A) (E) (G)	10.0 - 10.45 GHz 10.45 - 10.50 GHz	(A)	Queensland and Tast operation is restricte	mania, d for
10.00 200.00 0112	(4)	248.00 - 250.00 GHz	(6)	10.45 - 10.50 GHz 24.00 - 24.05 GHz	(A) (G)	(a) the sub-hand 50.05 t	
				24.00 - 24.05 GHz 24.05 - 24.25 GHz	(E) (G)	MHz,	O OU.EU
				47.00 - 47.20 GHz	(A) (E)	(b) locations outside the	
				75.50 - 76 00 GHz	(G)	minimum radial dista	
				76.00 - 76.00 GHz	(6) (A) (6)	<ul><li>(i) Television Channel 0 stations - 120 kms,(</li></ul>	

Channel 0 translator stations - 60 lons:(iii) Television Channel 0 translator stations with Channel 0 inputs - 60 kms

(c) emission mode 200HA1A with a maximum transmitter power of 100 watts pY, and (d) emission mode 4K00J3E with a maximum

transmitter power of 100 watts pX. (iii) In the Australian Capital Territory operation is

(a) the sub-band 50.05 to 50.20 MHz:

(b) emission mode 200HA1A with a maximum transmitter power of 100 watts pY, and

emission mode 4K00J3E with a maximum transmitter power of 100 watts oX Communications with amateur satellites are authorised in this band. (Excluding Nevice

### APPENDIX ( TIBLE ACCESS CONTROL PARAMETERS

Tone Burst tone frequency 1750 Hz. EIA standard tones (Hz) (ii) CTCSS 67.0 94.8 141.3 69.0 100.0 146.2 71.9 103.5 151.2 744 107 2 158.7 77.0 110.9 162.2 79.0 114.8 167.9 92 5 118,8 173 8

85.4

88.5

123.0 131.8 91.5 138.5 192.8 (iii) DTMF Bell Standard

Digit 697 Hz 2 3 Low 770 Hz 4 5 6 Tone 852 Hz 7 8 g 942 Hz 1336 Hz 1477 Hz High Tone 1209 Hz

179.9

186 2

ITALEMICATON ORRIGMATIONE

### Sterrillarition of Emissions

 Classification of emissions provides an Internationally recognised standard to accurately specify the significant characteristics of a transmission.

2. The abridged version of the emission

designation system, detailed in paragraphs 3-6, covers emissions used in the Amator service. More comprehensive details on emission classes may be found in the

International Telecommunications Union (ITU) Radio Regulations

Classification Method

3. To fully classify an emission a total of MINE ietters and figures are used. The first FOUR provide details of the necessary bandwidth, the following THREE give details of the basic char-acteristics of the emission and the last TWO, which are optional, describe any additional characteristics which may provide a more complete description of the emission.

Example:

6M25 C3F [6M25] Necessary Bandwidth

**IC3FI** Emission Characteristics (MM) Supplementary information

First Foor Symbols These provide details of the necessary bank width of the emission expressed by three au merals and one letter. The letter occupies the position of the decimal point and may be H for Hertz, K for Kilohertz, M for Megahertz or G for

Following Three Symbols these describe the basic characteristics of the emission. The first defines the type of modulation of the main carrier, the second the nature of

### the signal(s) modulating the carrier and the third the type of information transmitted First Symbol - type of modulation of the main

(a) Emission in which the main carrier amplitude is modulated:

Double-sideband (Amplitude Modulated) A (ii) Single-sideband, full carrier H
(iii) Single-sideband, reduced carrier R

(iv) Single-sideband, suppressed carrier J Independent sideband E Vestigial sideband C

(b) Emissions in which the main carrier is angle modulated

Frequency Modulation F Phase modulation G

Emission pulses: Unmodulated sequence of pulses P Second symbol - nature of signal(s) modeleting

the main carrier No modulatino signal 0 (b) A minole of the

carrier 1

A single channel containing quantitized or digital information with the use of a modulating carrier (d) A single channel containing analogue informa-

Two or more channels containing analogue information 8

Taird Symbol - type of information transmitted No information transmitted N Telegraphy - for aural reception A Telegraphy - for automatic reception B

Data transmission, telemetry, telecommand D Telsphony I

(g) Television F (h) Combination of the above W

### Last Two Symbols

These describe any additional characteristics which provide a more complete description of the First Symbol - details of signal
(a) Sound of commercial quality with the use of

frequency inversion or band splitting k (b) MonochromeM

(c) Colour Second Symbol - nature of multiplexing

(a) None N **Emission Description** 

### 7. Examples:

200HA1A 200 Hertz bandwidth double-sideband single channel (without the use of a modulating audio frequency) TELEGRAPHY for aural reception

3K00J3E 3.00 Kilohertz bandwidth single sideband suppressed carrier single channe analogue TELEPHONY

6K00A3E 6.00 Kilohertz bandwidth double sideband single channel analogue TELEPHONY 16KOPSE 16.0 Kilohertz bandwidth frequency modulated single channel analogue TELEPHONY

information without the use of a modulating

**COVER STORY** 

### James Brinkhoff VK7FAN Don Cripps VK7AY PO Box 414, DEVONPORT 7310

It is really great to know of our younger generation who are showing their hands by becoming amateur radio operators. Here is another, and I believe it is all the more interesting as this young man has no family with amateur radio interests, and I understand made his attack on the NAOCP without really knowing any amateur enthusiasts

James Brinkhoff, aged 11 years, sat for his NAOCP exam, Morse theory and regulations on 20 November 1991, passed all sections, and was granted his licence on 10 December, callsign VK7PAN.

James comes from the small town of Kelso, on the Tamar River. site of transmitters for ABC station 7NT (Maybe the sight of those high antenna masts was the catalyst9.

Within a day or so of receiving his licence, he was lent a transceiver, helped to erect a G5RV, and introduced himself to Tasmanian amateurs on the daily sked on 3590, known as the "sewing circle". (Thereby hangs another tale). He has been a regular contributor on the "sewing circle" ever since, and has also been regular on the "Tasmanian Devil Net" on Tuesday evenings; he has many overseas contacts to his credit already

James turned 12 on 20 December He admits to first trying out CB radio, no doubt from his father's and mother's (Steven and Judy) interests in yachting, but says his enthusiasm stems from his long-time interest in

electronics, so here's hoping this brings him fortune When asked how he enjoyed learning Morse code, he very nonchalantly replied, "Oh, that was easy, I could read it pretty well after a couple of nights study.

# "Computarock" HF Receiver

An ingenious and relatively inexpensive "homebrew" answer to the need for a general-coverage HF receiver. "If a digital readout is desired, counting a VFO which tunes 8-9MHz can be done easily without need for further manipulation."

> Drew Dismond VK3XU Nor Molon, Gatters Rd, WORUA PARK 3115.

constructor wishing to build a workable multi-band HF re ceiver may search through magazines and handbooks, only to find "high-performance" designs which can look rather daunting, typically having lots of complex switched filters, ingenious PLLs. AGC loops, intricate metal-work and fancy hard-to-get components. In radio literature there appears to be a substantial gap between the fully engineered no-compromise designs and the relatively simple. no-frills single-band DC or superhet receivers. These simpler designs make interesting and worthwhile projects for radio enthusiasts of all types, and presently there is a wealth of material from which to choose. As a rule, however, they fall short of the standard necessary for a home station receiver, particularly where greater frequency coverage is required

Here is a practical receiver which attemps to fill that gap It as a consolidation of circuity from previous projects, notably the "Super-DC", "Computarock" and "DO31" efforts, together with ideas from other experimenters. Whilst not intended for exact duplication, the circuit details presented here may encourage the more expeenced worker to adapt and modify according to individual requirements and resources.

No claims of high-performance are made. The simplified and compromised nature of the input band pass filter may allow an unwanted image signal (it will need to be a strong one) to appear near a wanted signal and pass through to detection. NE602s are used as first and second mixer. Whilst by far not the strongest mixer IC available, they are cheap, easy to use, and obtainable. Finally, AGC is only applied to the 3-4MHz RF amplifier stage, so useful but not full AGC action is obtained. Nevertheless, in practice, the receiver gives a good account of itself despite these compromises, and provides quite respectable performance. Dynamic range is sufficient for all but the most hostile receiving locations. After alignment and adjustment of the AGC, the receiver is sensitive and pleasant to operate. All amateur bands are forward tuning. The prototype has the following characteristics:

### Performance Frequency Range: Reception Modes:

Basic range 3-4MHz, then sny 1 MIIII, turni limin 7 Vs. shmill 28MHz (see table) SSB USB/LSB, CW, DSB, and AM (se SSB) (se SSB) N, I N. Less than 100Hz defit in any hour Worst case 50th to the highest

able birdies at 3.33, 7.5, 9.5.

finage Rejection: Internally Generated Sourious signals:

M.D. and 15 SAINz, plus

| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz, plus
| M.D. and 15 SAINz

### Circuit

Basic tuning range is nominally 3-4MHz. Signals in this range must negotiate the 3-4MHz tuned filter which tracks 5MHz below the VFO An MFE131 dual-gate FET provides a degree of RF gain or loss to signals before they are applied to an NE602 halanced mover chin. A LED is inserted in series with the FFT source to increase AGC. range. The input attenuator is useful for dealing with particularly powerful signals Local oscillator VFO, which operates 5MHz above the input frequency, is applied to the oscillator port of the NE602 (the internal transistor within the NE602 can, and usually as used to provide the LO signal. However, for best results, and to minimise the production of spuri, the oscillator should be a separate unit, isolated off the chip from the remainder of the mixer circuitry)

The resulting IF signal at 5MHz is matched and applied to a crystal ladder filter comprised of four identical 5.0MHz computer crystals. The value of coupling capacity shown, 3p3P, yields a bandpass of about 1.7kHz, which probably represents a from compromise for CW and KSB work. Smaller values of C (eg 27 or 22pP) will give wider bandwidths.

The choice of 5MHz as the IF was quite arbitrary. A round number IF means the VFO must generate a signal which relates directly to the receive frequency (those digits to the right of decimal point where MHz are the whole-number part). If a digital readout is desired, counting a VFO which tunes 8-9MHz can be done easily without need for further manipulation. Naturally, other IFs, such as 4,433 or 5.068MHz etc may be used if preferred, and the VFO range altered accordingly. Another MFE131 does duty as product detector. BPO signal at either 4.9994MHz or 5.0014MHz, placed at either end of the crystal filter bandpass, is applied to G2 of the MFE131 to obtain LSB or USB reception. The single SMHz BPO crystal is pulled either high or low with series C or L respectively (the 3-4MHz to 5MHz conversion inverts the sideband, so 5.0014MHz BFO gives USB reception) Product detected AF appears at the drain, where RF energy is removed through the simple LC filter.

A LM741 followed by a LM366 rases the AR signal to headphone or loudspeaker level. A sample of AF is picked off at the output of the 741 and applied to another 741 acting as AGC amplifier, where x is rectified, the LHF capacitor charged, which drives a DCamplifier to supply AGC control workings back to the RE amplifier RF grain is also manually adjustable via the 20K RF gam pot.

For reception of signals in the 7 28MHz range, the input is routed via the converter circuit. A three section top-coupled bandpass filter is manually peated so that the chosen band is presented to the input of the thosen band is presented to the input of the three bands is presented to the input of the three bands is presented to the contract of the band, eg to receive 7-8MHz, we need a band, eg to receive 7-8MHz, we need a 4MHz crystal (7-3 -4 and so on. The table shows the bands obtamable with standard is computer crystal). The 3-4MHz first final is extracted from the balanced output of the NNSO2 through a broadband transfer where it as applied to the "input" of the basic receiver.

A band not available is 8-9MHz, being the same as the VFO frequency. More importandly, it was found that the 5MHz conversion crystal frequency interferes directly with the IF. 9-8MHz is available of essential, as a backwards tuning band using a 12MHz conversion crystal, so the birdie will only appear at 8-5MHz.

### Construction

It is suggested that the basic 3-MHZ is esection be tackled flux. For this project is may be assumed that the enthusias who contemplates building a multi-band receiver will know where to say hands on many of the 'hard-to-get' items required for a job of this kind, although the only perceived of-stacles for the relative newcomer are perhaps the exquisition of water switches, a 3-gang variable capacitor with 200, 200 or 400Pp Far section for the 3-MHZ receiver

section, and a three-gang variable capacitor of similar capacitance per section for the converter. The capacitor for the converter is not critical, provided all three gangs have identical value.

For the main receiver, the builder may have to do some maths and experimentation to fit the capacitor to the task. Maximum and minimum total C are shown on the circuit as a guide. A three-gang 200pF unit is to be preferred, as best linearity of turung will be obtained (a larger capacitor with series fixed C compresses the tuning at the high end, and tracking will be poor). If only a 300 or 400oF unit is available, canacity may be reduced by extracting the surplus portion of the moving plates of each gang. For example, a 400pF with 18 plates each may be converted to about 200nF by removing half the moving plates. A leweller's piercing saw is probably the best tool. Carefully cut through the supporting spacer to isolate the unwanted individual outside plates, then extract them one at a time with long-nosed placts. Make sure no swarf gets into the plates or bearings.

Naturally, a wider tuning range may be employed if desired. For instance, if the basic range is made 3MHz to, say 4 2MHz, then we will have a range of 5-10.2MHz with a 6MHz conventer crystal (stock 7MHz for the 10MHz band are not known to be waislable), buts covering the 10.1MHz band. Similarly, a stock 2MHz crystal will allows 27 to 10.282MHz range (2MHz crystals are


available from some suppliers)


Wafer switches are ideal for handswitching, especially the kind that you can make up to requirements. Configure a 4-wafer/11 or 12-position combination three wafers for the converter filter, and the fourth for the crystal selection. Wire the filter wafers with the 12MHz break point appropriate to your chosen bands (the circuit shows this function schematically sunplified) For the prototype, the 7, 9, (10) and 11MHz bands occupy four positions, all wired together, then 13MHz and above occupy the remaining positions. Retail suppliers cannot, as far as I know, supply wafer switches of this type. They are by no means a mandatory remainment however. The 7-12/12-28MHz selection could be done with an ordinary 3-pole/2-position wafer, and the crystals selected with a 1-pole/12-position switch (It was hoped to cover 7-28MHz with just one set of two coils, but image and sensitivity problems due to poor L/C ratios were significant. Two sets of three coils were found by experiment to provide acceptable image rejection and sensitivity across the mid to upper HF range).


The physical shape of the prototype (rather an ugly duckling - but I've grown to like it) was largely dictated by the deluxe 3gang variable capacitor/worm-drive/dial assembly (very similar to the "Command" receiver canacitor) which was on hand. So it was decided to fit the assembly unright. and fix the circuit boards upon two vertical chassis panels as shown. The transformer and power supply components are located upon the rear panel, converter circuit on the left panel, basic receiver on the right panel, and VFO in the space between. The panels thus form a screened area for the VPO, effectively separating the three sections, and gives a shipshape rigidity to the whole assembly

Circuit boards (or whatever wiring method is chosen) are as follows: RP amplifier/ mixer/crystal filter/product detector, AF amplifier, AGC amplifier, BFO, VFO, power supply and converter/bandswitch.

A 12V regulated supply is necessary. Peak current demand is about 100 ma, although extra capacity should be provided if dail and 5 meter lamps are required. The 
standard 2155/15V transformer with froution is ideal. If a manns supply is used, be 
sure to micules 2500 mA five in the fine in each
of the 26V mains supply, and switch both 
conductors with a DPDT switch. Marine earth
mass be connected to chassis ground with
mass be connected to chassis ground with
a declarated server, solder tap is not wather



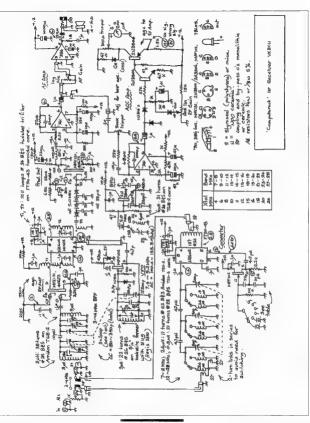



3-4MHz receiver section.

and nut. All connections must be adequately covered to prevent accidental contact.

Further notes on construction may be gleaned from Ref (1), and additional information also from Refs (2-4). Most of the home-made circuit boards relate closely to the Super DC receiver, and may be individually adapted to suit your own model. Indeed, there is no need to wire the thing using printed boards. This receiver worked entirely satisfactorily during the breadboard phase, blobbed up on scraps of printed board using the "ugly" method, so we may safely assume that just about any wellknown RF construction method will give satisfactory results, providing the general layout is observed. For best stability, use polystyrene (styroseal or silvered mica if available) and NPO capacitors where indicated Miniature 50 ohm cable was used for the coax connections.

### Alignment

VPO range must fins be established. Set the S5P trien capacitor ombit travel. Adjust the alug of the VPO coal so that, with reason of the VPO turing capacitor, about 7590MHz uge mertaled arrans. Can 459-MHz at min C. The inclusion of the time capacitor to base of on experience, and may be found useful at some much later date to provide to the companient of the dall, made necessary by any change with time of VPO component values.

Connect an antenna to the receiver in-

put. A few meuses of wire will probabby do. Set the RF pot to maximum gain. If there is floorescent lighting, or RV power lines nearby, you should bear some line-related noise. Turn the receiver to about mid-band (3.5MHz) Peak the two 55pF trim capacitions for maximum noise. Sensitively should now be reasonably flat across the band. Sub-microvoit signals at night should be casily detectable, and the set should sound linely. Find a latify strong CW or RTTY station. Adjust the 25pF trim capacities is series with the MHz BFO crystal so that a strong heterodyne is heard on one side of zero beat, the heterodyne being much



"Computarock" HF receiver.

weaker as you tune through to the other side of zero beat (about 1/5 mesh or 5pF). No adjustment is provided for the series coil-you may wish to substitute a coil and slug of about 10µH here to permit a more accurate setting of the BFO frequency for USB signals.

The 500kW trimpot at the input to the AGC amplifier is adjusted subjectively to what the user regards as most pleasing AGC action, ie find the point where AGC action. occurs, but is free from attack pop and click on strong signals. This should occur near the top end of the trimpot range. Monitor the AGC voltage at the emitter of the 2N3906 Weak or no-signal voltage should be about 12V. When a strong station is tuned, the voltage should quickly drop to about 2V The S meter trimpot is set for FSD on a strong signal Anti-clockwise rotation of the RF gain pot should cause the S meter to indicate upwards to FSD. When the converter is in use, there will

be two or more sharp "peaks", separated by about 30 degrees rotation, as the input filter is tuned. One of the peaks will be the required band, the other(s) will be an image band. For instance, with a I6MHz conversion crystal, desired forward tuning of 19-20MHz will be obtained. Another peak will be found at 13-12MHz, tuning backwards, and is there if you want it. If the desired band has a grouping of two or three closely spaced peaks, you can bring them closer together if you wish by experimentally bunching or stretching the turns (thus altering the inductance) of the appropriate coil. A look-up table of switch positions and tune settings may be typed and affixed to the front of the set to allow rapid band changing Harmonics of the conversion crystal may also give access to other bands. For example, the second harmonic of the 11MHz crystal, 22MHz, will give usable 19-18MHz coverage (22-4=18, 22-3=19), and, once again- is there if you want it (got some time to spare? Just for fun, work out some of the others, there are many possibilities). Cunning use of the converter input filter will sort these out.

### Pralisems

Some key voltages are shown on the circuit as a guide to any necessary troubleshooting. The DC voltages were measured with respect to clusses with a high-Impedance DMM, and Fil evels with a standard diode probe. A voltage which differs significantly should indicate a problem area. If the VFO or conversion oscillator will not work, try another MPPIOE (some cleaner makes are. I suspect, "from the bottom of the barrel"). If you cannot get your receiver to perform satisfactorily, or consider that it will not work properly due to some mistake or oversight herein, or require further details, please write, and any reasonable amount of help will be returned. For reply, an SASE would be appreciated. Interested constructors may inspect the prototype at the writer's OTH after first confirming on (03) 722 1620 outside work hours.

### Parts Bourges

All FETs, chips, trim capacitors and Amidon cores are available from Truscotts Electronic World (03) 723 3860, and Stewart. Electronics (03) 543 3733 (the writer has no connection with either firm). Other Amidon suppliers advertise regularly in this journal. Shop around for best price and range of computer crystals - best I've seen is around \$3 each from a well-known computer/electronic parts supplier. The NE602AN has measurably better intercept characteristics than the earlier 602, so try for the latest version available. Vintage radio shops, radio chibs or disposal sources may be able to help with ganged variable capacitors. The Aggis 3510 bakelite coil former for the VPO may be difficult to find. Truscotts have a supply of ordinary IF transformer type 5/



VFO and main tuning a

16" coil formers which would reasonably

References and Further Reading (1) Super-DC Receiver - Diamond, VK3XU, All, May Computarock Converter - AR June '91. DC91 Receiver - AR, May '92 How to Lay Out RF Circuits - White, G3SEK, Rad

- Comm. Feb/Mar '91
  NE602 Single Chip Prequency Converter
  Covington, Radio Electronics April '90.
- SSB Receiver for 80m Williams, VK2DOB. EA Sept and Dec '91

amateur

6 Ηουσε αδωερτισεμεντ∏ φορ Αματευρ 99
Ραδιο Αχτιον μαγαζινε το αππεαρ ιν ΩΙΑ φουργαλ Αματευρ ΡαδιοΠ.

For subscription details to just about anywhere, phone Grant Manson on (03) 601 4222

If all this looks Greek to you, perhaps it's because you're not reading the authoritative source — Amateur Radio Action magazine... at your local news outlet every fourth Tuesday.

# Random Radiators More on Tree Antennas

Run Carl VK30M I

ob Eldridge writes from Pemberon in Canada. It's nice to bear from overseas readers and his kind comments are much appreciated. Bob was inspired by the November 1991 article to look up the FBTO data base and came up with three articles on tree antennas. Bob has sent photocopies of these and they are summarised below:

### Shurst Excited Tree

This article was published in the May 1989 issue of CO Ham Radio IA) according to page 26 of the May issue of 73 magazine. IA6HW and IA6AUI are reported to have carried out a series of experiments on live trees. A matching unit is described for a 12ft tree on the 10m band. Using 50 watts CW SSB and FM they worked stations in the US. Europe, Asia and Australia. An L match type of ATU is used at the base of the tree. One terminal connects to an earth stake and the other to a wire which runs parallel to the trunk to the tapping point. The connection to the tree is accomplished by a stainless steel holt screwed about 30mm into the trunk. It appears that the tapping point was about 3ft up the trunk.

Field strength tests showed that the tree was the main source of radiation, not the matching wise. Most of the radiation was vertically polarised, but some horizontal radiation from horizontal leaves was noted. Roh added some comments about his own experiments with trees.

"Notice that the input terminal doesn't on very far into the tree. This makes sense if the bark is very thin I made some experiments with cottonwood trees (a kind of larch), which have thick bark, and found you have to get through the bark and past the laver where the sap runs. But there is not much to be gained by soing further into the bard wood except in the case of a tree (like the cottonwood) where there is a beauv flow of sap right in the centre. Trouble is, you don't know fust where the effective centre is. although if you drill in from the north it is somewhere north of the geometric centre and about centred east and west I suppose for you upside-down people you would go in from the south "

### HEMAC

Another method of coupling the RF into the tree is a Hybrid Electronagnetic Antenna Coupler (HEMAC) which was develoy Dy Kutt literals. Bob has sent copies of two articles on this device: The first is from Ham Randhomagazine May 1974, page 4. The HEMAC is a coil wound in toroidal from around the truth of the tree. The coil is air wound and held to the tree by means of a stap which is probably made of plastic. Two taps are made onto this coil, and connection made to a matching network which provides a match to a coaxial feed line. Tests showed an improvement of up to

22dB over a comparable whip, particularly in wet jungles. Two trees were used to provide a steerable phased array. The HEMAC was also used to couple to metal utilety poles and humans Coupling to the belly did not word, but other parts of the body did. Tal people made better antennas than thin ones. The two Rons do not adute coupling of transmitters to humans as overbeating and consequential injury may occur, particularly fly power levels above one usual and frequencies above the HF spectrum are used.

The second article on the HEMAC was printed in 73 magazine of January 1975, page 21, with feedback on that article in the March issue on page 7

It states that the HEMAC acts like a transformer with the tree being a single turn secondary. It was found that lower frequencies were absorbed less by the surrounding forest, but the height of the tree was also important. A 100ft tree worked best in the 80m band, for example.

Bob also clies an article from CO maga-

zine of April, 1978, page 79, on using a tree on 160 metres, but was unable to supply a copy. Maybe another reader can help.

Bob continues -

"I use 160 most of the time, and the tree I suspend the vertical loop from is about 130ft tall. Despite all the top loading it may resonate at 160, because it sure makes a difference in antenna resonance if I move the apex (a voltage antinode) towards and away from the tree. Also, I can certainly measure re-adation from the trunk of the tree with an MFJ RP current probe (incidental and accordance) and the sure with a mFJ RP current probe (incidental and accordance) and the sure with a mFJ RP current probe (incidental and accordance) and the sure with a mFJ RP current probe (incidental and accordance) and the sure and the

I may as well mention while writing that the MFJ SWR analyser is quite useful too But it may be a good idea to mention to your readers that it doesn't really look for SWR, it looks for 50 ohms. So if you are using 75 ohms cable:

Lamp cord. Ours a probably radically different from yours, because many years ago we used some for receiving antennas because time susted about 70 ohms impedance. It was clary for that because we were not concerned about 70 ohms impedance. The was clary for that because we were not concerned about #6 officency. But the loss per 100 feet was very high even at 200 feet was very high even at 200 feet was very high even at 200 waste of which work worth a dama for transmitting, and got quide warm at 100 waste to row We treed some flast Accord and it was even worse.

A practical matter I haven't seen covered is the usefulness of using pulleys instead of insulators at the corners of wire loop antennas With a vertical Delta, for example, it is quite difficult to predict just where the insulators should go at the bottom corners to end up with the base wire reasonably taut, and the whole thing has to be hauled up and down several times to get it right. With pulleys it self-adjusts. One becomes aware of the problem when there is a couple of feet of snow on the ground or the grass is 6ft

The same applies to a horizontal loop. I have one about 600ft around, roughly square and above thick grass, brush and trees, gardens etc. and I find letting the wire slide through insulators just doesn't work well Mostly because I have taped connections here and there because of my "try adding 30 feet", "add another seven", "add another three" method of "tuning".

Your suggestion that 275W input AM is equivalent to about 600 watts PEP output on SSB gave rise to some interesting discussion around here, as you seemed to be looking at the spacing on the capacitors. We more or less agreed between ourselves here that "275 watts input" meant "275 watts unmodulated input to the final" in

# (I) and continue once

tree antenna. 1. C: 70pF 500V variable capacitor, adjusted about halfway n; L: 0.9;H coll. 2. Tree used is about 3.73m high, diameter at A is 12.5cm;

### A Call to all Holders of a Novice Licence

Now you have joined the ranks of amateur radio, why not extend your activities?

The Wireless Institute of Australia (N S W. Division) conducts a Bridging Correspondence Course for the AOCP and LAOCP Examinations

Throughout the Course, your papers are checked and commented upon to lead you to a successful conclusion.

For further details write to

The Course Supervisor WIA

PO Box 1066

Parramatta NSW 2124 (109 Wigram Street, Parramatta) Phone (02) 689 2417

11am to 2pm Monday to Friday 7 to 9pm Wednesday

those days, equating to about 200 watts output, which when modulated produces about 400 watts PEP But then we considered that AM puts a considerably greater stress in duty cycle for current flow, so maybe taking everything into account, your figure may be right. I had a 275W Matchbox one time, and regret having given or sold it to someone. I have a 1kW one stowed away in the attic, but it has a totally different design as you probably know, and is very

Now we figure it this way. Two hundred and 75 watts of AM is 275 watts of DC input. plus the modulation signal which doubles the supply volts and the plate current at 100 percent modulation (high level plate modulation assumed). Thus the total input is four times 275 watts, or 1,100 watts peak. If we assume that allowing for average efficiencies of the modulated final and output tank circuit that an effective efficiency of 55 percent is obtained, then the PEP output is 605W PEP. It should be noted that while the average power for a 100 percent sine wave modulated final is increased by 50 percent. the peak power is increased by 400 percent. An ATU designed to handle a 1kW input AM rig could handle more than 2kW



HEMAC in position on tree. (Drawing courtesy 73 magazine, January 1975).

PEP output. Old timers will remember that 100W SSB rigs had smaller components in them than 100W AM rigs - some of us were most surprised that they worked without

sending out smoke signals of distress. That's all for this time, so it's 73 from me and 73 from him

The Two Rons

# Homemade Spectrum Analyser

Paul Kay VK4S1 20 Gilbert S WINDSON 4030

Very little has been described in amateur radio magazines concerning the spectrum analyser, its theory and operation or how to build one. There is no denying a spectrum analyser is a most complex piece of equipment. The complexity can be reduced by modular construction. But first, what is a spectrum analyser and what does it do and how?

n oscilloscope displays signals in the time domain as an ampli tude-versus-time graph. The RF appetrum can be displayed as an amplitude-versus-frequency graph and, for that, we need a spectrum analyser.

This article shows how to build a simple de spectrum analyzer. A spectrum analyzer project is unique for most of us amalyzer project is unique for most of us amalyzer project is under some unessistes at first However, by following the steps outland in this article, a usable spectrum analyzer is nightmarish in complexity and every expensive. Yet a homerated unit can be built to reasonable performance by following the guideling.

By using a mass-produced TV tuner front end that covers the 35-90MHz frequency range with good sensitivity.

By using economical consumer priced modules for IF, selectivity, detector, oscillator and audio sections.

Using your own CRO as a display unit.

Modular, repeatable construction.

This spectrum analyser uses the double conversion principles to translate on the screen any frequency between say 35-

910MHz (see fig 1). Signals arrive first into varactor front-end module. This selects the frequency we wish to monitor. This module feeds into second conversion module using the receiver section of a handheld CB radio that boosts the signal and provides needed selectivity. IF frequency in this module is 455kHz and uses ceramic filter for selectivity and ample stable gain to feed an AM detector. We need an amplitude detector to drive the vertical amplifier in our display section. The base line (grass) must not shift on varying signal levels and is referenced on zero or chassis earth. Only two modifications are needed in this module, namely the RX Xtal of 26785kHz has been substituted by the 27240kHz Xtal at present in TX position. This reduces CB breakthrough. An OA91 diode and a 3.3k resistor in parallel with a 22nF capacitor has been added to the last IF providing a separate detector to provide the output to the CRO of the required positive polarity for CRO The audio section is intact, and the mute pot is wired off permanently RG178 miniature coax is used between the IF section and the CRO display and for aerial input. A 47pF capacitor couples the varactor tuner IF output to the CB module aerial terminal. A three-position rotary switch selects the frequency range, either VHF Low or High or UHF. All frequency band limiting components are omitted so there is a fair amount of overlap between the switch positions. The low end starting about 35MHz with the high end just covering the cellular telephone band around 910MHz.

A purist might object to having a spectrum analyser with an audio section included, but it's there anyway it's a bonus already built in to the modules as they come (See fig 2)

Four of these units are in almost daily use now. Some have FM sound and a slightly different front-end module, and some are AM sound. Any combination of these has been used with good results, this particular article uses AM board for IF and detector section.

The very first unit was built to check various modules: They all work and they work well considering their simplicity and low cost. None of the components used is a one-off-unit or hard to obtain or unobtain-ble. Almost SQ percent of the components come from garage sales or Sunday flea markets. For example, a pair of Perris HF3000 hand-helds used there cost just \$10,000 hand-helds used there cost of just \$10,000 hand helds used there can dives be suffered to the cost of the suffered hand to be suffered to the cost of the suffered hand to be suffered to the cost of the suffered hand to be suffered to the suffered hand to be suffered hand to be suffered to the suffered hand to be suffered hand to be suffered hand to the suffered hand to be suffered hand to be suffered hand to suffered hand to be suffe

### Construction

The unit is housed inside the case of the defunct revo-way radio built by Willis All parts were removed and the case given a coat of paint. PSU components were insalled on the bottom plate, which sused as chassis. Although the inside are is only  $7^{1}/_{2}$   $7^{1}/_{2}$  it's more than enough. Parts and modules occupy only about half the space available. A small speaker is mounted on the top plate. All controls are on the front paint. Occur leads to the CRO and the aerial to the control of the control of the CRO and the aerial to the control of the c

The LM31T voltage regulator is threeterminal type, and is bolted against the bottom plate using a normal mounting kit. Heatsink compound is not needed as it runs barely warm to touch. The varactor tuning voltage is derived from a voltage doubler and is Zener regulated for simplicity.

Note: This voltage must be stable without any hum or inple Remember, this voltage controls your incoming frequency Any hum causes blurry cusps on the CRO display. Larger variations shake signals left and right across the screen. We need only a



Internal view of spectrum analyser - PSU is in top lefthand corner. Mitsumi tuner is in the middle, and the Ferris HF3000 board is on the right.



The complete spectrum analyses

few milliamps to control frequency. The CB board needs about 50mA on low volume; this is sufficient for normal use. Adjust the 5k preset to give about +13V for the IF board. It goes without saying that all the components have to be rigidly mounted, and leads carrying 240V AC must be shelded properly and away from other components.

### Display

For display purposes an oscilloscope is used. Any CRO will do here. The author has been using an ancient HP6288 round face as well as D/S LAB, CRO (ex-parage sales) and also a leader LBO507 square face. If a round-face CRO is used, the grass line is adjusted across the middle of scope screen. A square face is a bit fancier, as you can bring all the action to the bottom of the display. It's necessary to use an AM detector here as all the action is ground-up, that is to say, above ground level. The time constant of this RC combination must be sufficiently short to avoid any unnecessary stretching of the AM signal slope. In other words, display rise and fall times are fast. A combination of 3.3kohm and 22nF is sust about right. The resistor can be increased if your CRO is insensitive, but leave capacitor alone. Direct coupling is used to preserve good low-frequency response

Any AM CB board will work fine without any touch-up as is, but the detector diode should have the right sense, that is, positive pointing towards the CRO vertical input. No harm is done if diode is the other way, except that your display is inverted.

We also need horizontal sweep voltage from the CRO. This is easy. Just connect an 82kohm resistor to the point that feeds the horizontal deflection plate on the CRO tube. Bring this voltage to your spectrum analyser using mini-coax. This voltage, as you can see in the circuit diagram, is superimposed on the varactor tuning voltage, thus scanning the segment of the RF spectrum of your choice. See fig 3.

The sweep voltage is not AC as such, but a fast-changing DC voltage. It does not spin 180 degrees however (almost) never cuiting the zero line. Use mini-coax and BNC connectors for CRO input and output. Older CROs, however need different connectors. About 15V sweep voltage is required for uner coperation. Amy CRO can supply more poeration. Amy CRO can supply more coperation. Amy CRO can supply more companies of the control of the control

analyser resolves FM-AM-SSB signals as well as harmonics and other spurs. In a spectrum analyser, complex signals are separated into their frequency components, and the relative levels at each frequency are displayed. The frequency domain is a graphical representation of signal amplitude as a function of frequency.

The spectrum analyser thus described can be built by anybody with an average toolbox and knowledge of radio. With a normal TV aerial it is possible to observe 6m activity, band openings, fadeout etc. TV




Fig 1: Spectrum analyser block diagram


than this, so a dropping resistor is needed to limit the full swing.

Propagation can be observed visually.

Pile-ups show on screen without spinning receiver dial back and forth. The spectrum

and FM stations come in from at least 50km away, with video and sound carriers vis-

All in all, this spectrum analyser project



has been a practical solution for a most useful item of test equipment.

High-Performance Spectrum Analyser. by Wayne Ryder W6URH, Ham Radio, June

Low-Cost Spectrum Analyser with Kilobuck Features, by Robert M Richardson

W4UCH, HR, Sept 1986 Panoramic Adaptor/Spectrum Analyser, by Rick Ferrsnti WA6NCX, HR, Feb 1983. Practically Speaking, by 11 Carr K4IPV, HR. Feb 1990


### Parts Summary

Resistors: 1 x 150 ohm, 1 x 220; 1 x 1k; 1 x 3.3k; 1 x 5.6k; 1 x 47k, 1 x 82; all 1/, w; 1 x 150 ohm 1 w; 1 x preset 5k

Caps. 1 x 47pF cer, 1 x 022 µF greencap 1x 047μF greencap; 2 x 10μF 25V, 1 x 22μF 25V; 3 x 1000μF 25V.

Diodes 1 x OA91, 1 x 1N4135, 2 x B2V 85-10; 2 x 1N4007

Miscellaneous Parts 2 x 50k pot lin, 1 x 5k pot log S SW, 1 x 100μH RFC, 1 x S/W -3-position rotary S/W; 2 x 240/12V transformer, 1 x fuse .5a, 1 x 1m 317T regulator; 1 x minibridge MR RB154; 1 x 5pkr, Mitsumi µV8, vol varactor tuner, Ferris HF 3000 board or similar: Midland - Tokai AM boards, knobs. AC lead.



# Matching to the Base of a Vertical Half-Wave Antenna A Simple Method

Clive J Cooke VK4CC PO Box 161

quarter-wave type antenna needs a complementary earth, counternoise or radial system to achieve resonance, whereas these are not required with a half-wave vertical radiator which, furthermore, has better low-angle radiation characteristics Matching of the feedline to the former is not difficult as both antenna and feedline are of low impedance. With a half-wave antenna, the high impedance at its base requires that more care be taken to correctly match it to a low impedance line such as a coaxial line having a 50 ohm surge impedance. It is usual to make use of a parallel tuned circuit appropriately tapped down the coul to match into the feedline, the top of the coil being connected to the base of the antenna and the outside braid of the feedline to the opposite end. Conditional on the feedline being taken down directly below an elevated half-wave antenna to avoid induced line currents from the antenna, there is no need for any other isolating action. However, protection against detuning of the parallel tuned circuit with changes of weather conditions is a problem but, as I have discovered in the construction of many trap multi-frequency dipoles for commercial use, the parallel tuned circuit which can

be achieved with a suitable length of coaxial cable alone is practically immune to changes of weather.

Therefore, these factors were taken into consideration when I recently understock the construction of a whip amenia for operation on Zi Halft, which I decided would be an electrical half-wave in length wound on a available 8-fit length of Brieglass tubing tapening down from a base duameter of two inches. (The antenna which I am about to describe is most to be and tuded in the about the state of the antenna ponneered by the late Queensland amateur Max Swahy, which require almost a balf-usue length of fire wire to achieve quarter-usure resonance against ground).

The construction procedure which I adopted was as follows:

 The requisite length of wire required for a conventional half-wave antenna was calculated by formula to be approximately 24 feet, and some heavy-gauge enamel-covered wire was out to that length.

The wire was spirally wound around the 8ft length of fibreglass tubing, making the pitch as coarse as possible for better radiation efficiency, but including about six closely wound turns near the centre section. These close-wound turns are for both loading and resonant frequency determination purposes.

3. The assembly was placed in the hori-

zontal position on top of a wooden ladder so the antenna was clear of objects likely to affect its resonant frequency and, by coupling to a dip meter, appropriate pruning of the wire was undertaken, checking with a receiver for frequency acquiracy, of course 4. The parallel tuned circuit made from a length of RG58CU coaxial cable was constructed for operation on the selected 21MHz frequency in accordance with instructions on the subject given in numerous textbooks. My coil diameter was 45mm and consisted of exactly four close-wound turns on the plastic water pipe former to which I was able to add end caps designed for the purpose and which protected the inside connections from rain. A small length of coaxial cable was connected as a trimmer capacitor to prune the circuit to the precise frequency of the antenna (21.1MHz). For the information of readers, a 14MHz coil on a similar sized former required 5.75 turns. 5. The coaxial parallel tuned circuit was then electrically connected to the antenna which had, as stated, been previously adjusted to the requisite operating frequency. On the ladder, the dip meter showed that the frequency had been slightly lowered with the additional coll, but not, as might be considered, by as much as the overall length of the coaxial cable. It was only by as much

as the actual physical length of the wind-

ing. This I had discovered many years ago

when experimenting with shortened beam

antennas The inductive effect of the coil

alone at the end of an antenna is negligible

For the inductance to be effective, a capac-

ity "hat" after the coil is required so that

current will flow in the inductance. Thus


only about two inches of wire had to be

removed from my whip antenna to restore

it to resonance as required

6 The anienna assembly was then temporarily lashed to the wooden ladder so that it now was vertical. The 50 ohm impedance tapping point, about one turn from the bottom end of the coil, was found by using our anient of a short length of freedline to a transmitter or measuring meter. A feedline to a transmitter would also do the job. The connection of the braid of the feedline is of across, to the bottom of the coil, and the tapping point is determined experimentally by upping the outer protective covering of the cable with a pin to make contact with the braid. The the braid.

pin was soldered to the inner conductor of



Mintar The resument frequency of the coil is adjusted by trimming a longe place of RQSSCU seldered across point X-X, while checking with a dip oscillator.

the temporary feedline. Having found the optimum connecting point, the protective covering was removed with a sharp last so the feedline could be permanently and the red to the base of the seed in the object of the seed of

ground.

No doubt the coaxial tuned circuit could be adopted for use with a full sized vertical reduction, but with the complication of first determining the resonant frequency of the antenna alone However, it is likely any minor reactines from an antenna slightly off resonant frequency could be compensated forly adjustment of the coaxial funed circuit. When it is actually connected to the antenna. The tapping point for the feedline should be determined once the antenna is in an in stin fail position.

# Technical Correspondence

### Horizontal Loops

there must be many operators very confused with all the articles on loop systemantennas, quaddelta and other kinds. Yes, there are other kinds of loops and I have tried most of them.

I am using at this time a triangular loop system. It is an obsuse triangle (you purists stay out!) mainly because that is where the trees are! But it does work (on all bands, yes) with the help of an ATU (home brew).

My loop is two wavelengths long in total, and is tuned for VSWR=1 on 3.797MHz. The feed is by 500hm coax and the tuning is by means of a quarter-wave inverted V cut for 3.797.

The feed point is at the northern end of the loop and the inverted V is connected to the loop. The side of the inverted V connected to the coax centre core is either cut or lengthened to obtain a VSWR of 1. If

difficulty is found in achieving this, try opening or closing the angle of the V.

This loop can be used on all bands with the use of an ATU. III 18 (01.88) sith prime band, then another 20m (66ft) is added to the tuning V on the side connected to coax centre core. At present the feed point is at 21m (70ft). One side is at 17m, the other side at 18m. 10 oil tend to raise the helght at some time in the near future, but at this present moment cannot find a round tuil!

If the reader has the room I have found have found that a V beam at 90 degree nagle and 1,5,0 and wavelengths long at 3,797 and tuned to optimum with an invented Va IB mor more will work very well. I have worked all USA states and all CQ zones on 75 with this, plus states and all CQ zones on 75 with this, plus SSB have been made to most parts.

SSB have been made to most parts.

BBI GARVYNCOW GO

19 Eastaway Ave Nth Narooma 2546

### **Book Review by Gil Sones VK3AUI**

MICROWAVE HANDBOOK, Vol 2 Construction & Testing. Edited by M W Dixon G3PFR, Radio Society of Great Britain 1991.

This handbook is a must for the serious and not-so-serious experimenter. Whish primarily concerned with amateur microwave technology, there is a great deal of information for the average experimenter. The chapter on safety is of significance to all amateurs. The hazards and how to minimize and avoid them are very well set out. This is of particular significance to those of us who have a handheld radio.

Chapters on Data, Filters and Construction are very interesting and have a much wide appeal than the narrow microwave field. The information is well presented and very easy to use and understand. Test Equipment and Construction are more specialised but are very interesting. However, the subject of beacons and repeaters is slanted more to the British and European scene and regulations.

Summing up, a most worthwhile and useful book.

# Wartime Reminiscences

Terry Hake VKSPC 16 Forest G TWO ROCKS 60:

After going through the usual wireless course in the UK in 1941/42 I found myself posted to a RAF station in Canada's maritime provinces as a ground W/Op. At this time of the war it was usual for would-be air ops to do further training in this way to gain practical experience.

were working Hudonouand Venturas flying on anti-sub patrols out over the Atlantic. These patrols are worth as series of stories in their own right, but back to my own. We noted that at night a German station used to intrude onto one of our HF frequencies. It became obvious to that this station was also working units by the "F" method which many readers will not recognise, so I will explain or recognise, so I will explain.

This consisted of sending a message and then repeating it to ensure the recipient had a good chance of filling in any missed groups the second time around. This type of message was transmitted at given times and did not require an answer from the unit It was used to prevent the receiving station having to risk being DFed and plotted. They were sent in five-letter number groups and sent very fast - about 28-30wpm by extremely good operators. On odd occasions these were interrupted by the receiving station, and a short exchange of about four groups rapidly passed back to base and acknowledged. It became our custom (and theirs) to send little bits of amicable Morse to each other to help while away the small hours. Most readers will know the type of thing, which I cannot include for fear of offending some of your readers, ahem!

This all ended rather abruptly one very cold morning - in more ways than one - when some of our bright lads' and I include myself) were called to the office to find some very official people with odd locking ggs on their cape waising to have a little chat with us. They had come all the way over the briny from Abingdom Monitoring Station in the U.K. We were very quickly informed about the penalties for passing messages to the enemy in warriane, and station and our little safet were produced in evidence. What had we to say for ourselves before being about 100 ms.

Well, we didn't know that the station we were sending our rapid Morse to was German, did we? And, since the oos at the other end used the same code for mild abuse to us we assumed they were a UK RAF station. This was received with a certain amount of dishelief, but we were off the book for the time being. We then had to explain to these officers what each little mixed group meant. This was met with amusement, much to our relieft We were then told that the station we were having our fun with was the German Luftwaffe airfield in Merignac. It was the main station for German U-boat co-operation, using Focke Wulf Condors over the Bay of Biscay and the Atlantic. The messages were going out to individual U-boats and aircraft, and the need for F procedure was obvious. Our frequencies were changed overnight

and, after much cautioning and many lec-

nues, we were not charged over the affair.
However, much later on in the war! I was
one of the crew of the first alteraft to land on
one of the crew of the first alteraft to land on
The station and runways had been well and
ruly plastered with bombs for some time
oney, and we had to land carefully on the
only runway then serviceable. The bomb
caters were quickly filled in with rubble,
but still needed to be avoided to save our
yress from this rough and ready surface.

Merignac had special memories for me and I went to look at the signals section, or what remained of it. This had been a vital element during the U-boat campaign and had had its lash acro of bombs. I crawled under fallen-in roofing and eventually got to the operators room. The tool tying there would have been worthy of a gleam in any ham's eye, but alsa could not be touched because of boody traps. I had a strange feeling about his room when thinking of the amusement the ops here had given us so far away, and we them, of course.

In passing I was less than amused when emerging from this place to be confronted by a Frenchman armed with sub-machine gun and brassard who threatened to shoot me for looting. These Frenchmen popped up towards the end of the war, and were a constant menace to us for some time until our own neonle moved in. They had, it seems, learned well from former masters on the ability to shout at the tops of their voices and order anyone in sight to take off. To move after dark, it was most important to be in company and speak at all times or risk a burst of gunfire. Merignac became a large RAF staffing post for aircraft then passing through to the Far East in vast numbers. As many as 40 aircraft a day refuelled and passed on for a very long time until the atom bomb put an end to the need.

Also interesting were the German depth charge dumps pear the airfield. These had casings made of concrete (due to shortage of steel in Germany) and were in huge dumps of several hundreds of tonnes. The casings over time developed tiny cracks, and the contents started to leak out (looking like honey). POWs were brought in to remove these and took a lot of persuading to do so, since a slip of one of them would have caused an enormous explosion. However, they were man-handled carefully one at a time, carted down to the port, placed on anything capable of being towed to sea, and there sunk a few miles off the coast. It was considered too risky to touch them again!

# Contesting in Turkey - TA5KA

In the December 1991 issue of Amateux Radio 1 briefly mentioned that the CQ Worldwide SSB and CW DX contests, which take place in October and November each year, are a good source of rare DX, and also rich fields for prefix hunters. A strategically chosen location could give the operators a chance to achieve excellent results. There is a small group of people who are very good at both DXIng and contesting. Some of the better known Hungarians come into this category.

Stephen Pall VK2P PO Bex S

short time ago, I received a letter from Dodi HA6NF, who en closed a brief description by Gyozo HA0MM about their participation in the 1990 CQ WW SSB and CW contest. The team for the October SSB con-

test was made up of Zoli HASPP, Joska HAOLC, Gyozo HAOMM and Jani HAONNN They were joined by their Turkish friends Mehmet TASB and Mehmet TASC, and the group operated under the callsign of YMSKA in the single-transmitter multi-operator cat-

egory. The Hungarians travelled by car to Turkey and, after 2500 kilometres, reached their destination at a seaside resort.

A three-element tri-bander beam, specially constructed for this occasion by HAMRUE, prowed to be a winner during the contest. Other antennas used were a Buternus HFOV and a variety of dipoles for 80 and 40 meters. The station was staffed by two operators continuously during the whole of the course, and they changed overewy four hours. The unique perfix was a blessing an disguise and created quite a demand for a multiplier.

A total of 7609 QSOs were made during the 48-hour period of the SSB contest - 135 countries worked. The team finished up with 1,50%,660 points, which was a new Asian record in the multi-operator single-transmurer category, and reached plurt position world-wide Both the transmurer and antennas world-wide Both the transmurer and antennas world-wide Both the transmurer internation of the country of the transmurer internation of the country of the property of th

The November CW section of the contest used the callsign TASKA and again stracted a good response from the contesting frateraxy. There was no more interruption to power supply because they decided to stay in a different house. The CW contest proved to be a winner for the Hungarians. They made 7201 QSOs on six bands, with a total point-score of 13,915,914, which rested a new world record in the multi-operator single-transmitter category.

TA 5 KA YM 5 KA

The TASKA operators at their QTH in Adans, Turkey.



The YMSKA team with their XYLs (left to right)
HAGNNN, XYL-NMN, HASPP, XYL-PP, XYL-LC,
HAOLC, XYL-RM, HAOMM.

# **YAESU BONUS MONTH!**

All this month is Yaesu bonus month! Don't miss these sensational bonuses on selected Yaesu equipment.

Your Choice Of Bonus!

### FT-411E 2m HAND HELD

Superb performance on the 2m band. Top of the line features, reliability and value for money from the name you can trust Yaway Only the compact FT-411F offers these standard features...

144 to 148MHz tranceive operation, with enhanced receiver performance
 Illira long life 1000mAH 7 2V NiCad battery pack

- 2.5 watts RF output as standard, 5 watts with 12V DC (or optional PN8-11 NiCad)
   Rether than 0.16xV (12dR SINAD) sensitivity
- Programmable power saver for extended operating periods
   Keypad or dial frequency entry, with selectable tuning rates
- 49 tuneable memories which store reneater offsets
- Band, memory, priority or limited-band scanning
   Just 55 x 155 x 32mm
- . Carry case, belt clin, carry stran and approved AC charges

 Now with enhanced receiver sensitivity and improved strong signal handling! Cat D-3350

BONUS Your choice of Yaesu PA-6 DC adaptor/charger (Cat D-3498 valued at \$39.95) or Diamond RH-205 telescopic high gain antenna (Cat D-4333 valued at \$39.95)

2 YEAR WARRANTY



# FT-470 2m/70cm HANDHELD

Dual-band performance at its best! The FT-470 is a very easy to use handeld transceiver that offers a high degree of flexibility through the use of a sensible microprocessor control system to provide both 2m and 70cm operation in one compact unit. Dual independent IF circuits allow several functions to be unit pusi independent in circuits ande several including to performed simu taneously including dual-band reception, and rui cross-band operation. The FT-470 also has 21 tuneable memories and 2 VFOs per band, olus inbuilt C T C.S.S.

### RONUS

Diamond RH-770 telescopic dual band high gain antenna for just \$10 (Cat D-4336 valued at \$79.95)

2 YEAR WARRANTY

ENHANCED MODEL



(encode/decode tone squetch) with a paging facility and a wide variety of scanning functions. A back-lit LCD screen shows a 5.5 digit frequency display on both bands simultaneously and a bargraph PO/S-meter lets you know exactly what you're doing The programmable 'power-saver' system helps maximise battery life, allowing squeiched receive current of as low as 7mA. The FT-470 comes with a high capacity 7.2V 1000mA/H MiCad battery pack, carry case, belt-clip, dual band antenna and approved AC charger

### Specifications

Frequency Coverage: Output Power Supply Voltage Current Consumption -Stand-by (with 1sec. save): 8mA (both bands) Baceius Sensitivity (12dB SINAD)

144 - 148MHz 430 - 450MHz 2.3W (both bands, 7.2V) 5.0W (both bands, 12V) 5.5 to 15V DC

150mA (both bands) Better than 0 158uV (both bands)

Cat D-3360



2 YEAR WARRANTY BONUS

Hustler RX-2 5/8 wave magnetic mount antenna (Cat D-4805 valued at \$49.95) \*YAESU bonus offer valid until June 30 1992, or while stocks tast

YAESII



With Bonus Antenna FT-212RH 2m FM MOBILE The FT 212RH is an ideal mobile FM transceiver that also doubles as an easy to use base station. With 45 watt output over the 144-148MHz range, rugged discast chassis for superb RF isolation) and extensive use of surface mount components. What's more, it has a large back-lit

# YAESU FT-990 HF ALL-MODE TRANSCEIVER

Take a quick look at the all-new FT-990 and you'll soon see the similarity to the top-of-the-line FT-1000 and for good reason. The incredible FT-990 embodies many of the advanced teatures and ease of operation of the FT-1000. But in a more compact, economical package that sports several new advances in both transmitter and receiver design. CHIK OTRANSO



Offer valid until 30th June 1992

### BONUS OFFER SELECTION

Your choice of Yaesu MD-1 deluxe desk microphone (D-2125, valued at \$169), or Revex W502 H.F. PEP wattmeter (D-1360, valued at \$189)

2 Year Warrantyl

### **Designed For Easy Operation** Just like the FT-1000, Yeasu have designed the FT-990 to be as

easy as possible to operate. The front panel layout puts all frequently used controls right where they should be ... at you fingertips. All controls are clearly labelled and the digital display provides an abundance of information in an uncluttered and easy to read format. The front panel keypad offers one-touch band selection (160m - 10m) with 2 independent VFOs per band and 90 memories that store the operating data held in both VFOs. You can't help but appreciate the large back-lit analogue meter rather than those confusing bar-graph meters found on other

### **Unique Features**

- . Customizable RF Speech Processor Yaesu's unique Frequency Shifted Processor (FSP) lets you shift the IF passband of your transmitted SSB signal to provide maximum punch with your voice/microphone combination
- . Digital Audio Filtering Razor sharp audio fittering is available for tough SSB and CW reception conditions through the use of an astounding dual digital Switched Capacitance Filter (SCF) with independently adjustable selectivity skirts Packet/RTTY - Separate interface jacks for a RTTY term-nal unit

and a Packet TNC are provided, while the mode selection buttons disable the mic automatically in the digital modes

### Direct Digital Synthesis (DDS) Two 10-bit DDS and a magnetic rotary encoder provide silky-

smooth VFO tuning, pure local oscillator signals, and very fast Tx/Rx change-over .. and that's very important for QSK CW and digital modes. The DDS is teamed with an extremely low-noise. digital modes in the DDS is teamed with an extremely low-noise, high performance receiver front-end using a PIN-diode controlled push-pull RF amplifier followed by a quad-FET ring mixer. The result is a very wide receiver dynamic range from 100kHz to 30MHz Transmitter signal purity is also enhanced, with circuit noise nearly 90dB down from the carrier.

### **Convenience Features** . A highly efficient AC switch-mode power supply is built-in. It

allows high duty-cycle transmission while keeping the weight way down, saving space and the added expense of external power supplies

• An in-built Automatic Antenna Tuner with 39 memories is

- standard!
- · Modular construction maximizes selectivity and makes servicing easy
- . Effective interference rejection is facilitated by IF Shift, IF Notch. IF bandwidth and SCF audio controls An adjustable noise blanker, a 500Hz B/W IF crystal filter and a
- comprehensive, easy to read user manual are also supplied



"QUALITY AND RELIABILITY YOU CAN AFFORD"



DICK SMITH (WHOLESALE) PTY LTD A C.N 000 908 716

### DIAMOND D-130J DISCONE ANTENNA



This quality Japanese discone antenna covers the frequency range 25-1300MHz, and was designed to be easy to assemble and install. The extensive use of stainless steel in the D-130J makes it very durable, while allowing transmission on the 6m, 2m, 70cm, and 23cm bands with maximum power rating of 200W PEP Comes complete with mast mounting hardware and instructions.



Save \$10

### 2m 1/2 WAVE -MITTER FORE BASE STATION ANTENNA

An outstanding value for money compact, Australian made base station

antenna which is only 1 69m long. It uses a single section Fit P radome for excellent all-weather operation and covers 144-148MHz with less than 1.5.1 SWR. The antenna provides approximately 3dB gain with a maximum power handling of 200W FM. It's fitted with an SO-239 socket mounted into the base for easy coax connection and comes with a 5 year warranty

### ST-7500 2m/70cm MOBILE ANTENNA

Cat B-4820

At last, a high performance dua band mobile antenna at a down to earth price. The ST 7500 is just (metre lang and uses a ground independent design to provide high gain (3dB on 2m, 5 5dB on 70cm) with a maximum power rating of 150W Quality Japanese construction. together with a littable whip structure make this an ideal antenna for the discerning mobile operator. Requires SO-239 antenna base (D-4035 recommended) Cat 0-4810

Major Amateur stores — Nth Ryde, York St, Parramatta, Chermiside, Bristiane City. Bourke St, Sorkovale, Coburo, Adelaide City and Perth City.

### 1.00 7 (2014 - 100 Color ) the Property of the Color of 17 77 at 18 at 18

### FT-757GXII ALL MODE H.F. TRANSCEIVER





Always ready for action? Whether you're in a demanding H.F. mobile situation or at home in the shack, the FT-757GXI won't let you down. Based on its popular predocessor (the 757GX), the MRZ features the same heavy duty die-cast heatisink. and rueded metal chassis for long term reliability. As well, it offers even easier to use controls and new features such as a pushbutton mode selector and IF Notch

- All mode operation SSB, CW, AM, FM (160m-10m)
   100 warn output on SSB, CW, FM (25W AM) at 100% duty cycle
   High performance general coverage recovery 150ists to 500Mz
   Dual VFO's with single button VFO'memory sweep sunctions
   Memones store freig & model and allow band scanning between adjacent
- Inbuilt 600Hz CW filter, IF Shift and IF Notch filters, variable noise branker. speech processor, rambic CW keyer and SWR meter Car D-3492
- 2 Year Warranty

Now Only \$1595

HF/6m SWR METER

REVEX



A superb indeband SWR/Power meter which boasts quality Japanese construction and a truly accurate P.E.P. metering circuit (unlike many other so called P.E.P. montor systems). The Revex WS02 features solid construction with an all-metal case and a large back-lit meter and it covers the 1 B to 60MHz range with less than 0.1dB large back-lit meter and it covers the 1.6 to butwing range with less than 0.100 insertion loss. With 20W, 200W and 2kW power ranges and LED indicators which show average or P.E.P. operation Requires 13.8V DC @ 200mA power supply

Cat D-1360

Save \$10 \$189

DS XPRESS PHONE & MAILORDER SERVICE YAESU BROCHURE HOTLINE

Outside Systemy (FREE CALL) 008 22 6610 System & Empairies - 888 2105 FAX (02) 805 1986 or write to DS XPRESS, PO BOX 321 N/RYDE NSW 2113 All Major Credit Cards Accepted D/Nite Courler Available

PLEASE CONTACT YOUR LOCAL STORE FOR STOCK AVAILABILITY, DR ORDER BY PHONE 008 22 6610

YAESU STOCKS NOT HELD AT ALL STORES.

### Awards

John Keileher VK3DP - Federal Awards Manager

### WIA DXCC STANDINGS LIST as at 7th May 1992

Considerable work has been put into updating and clarifying the WIA DXCC standing list. Old records have been re-examined, a comprehensive card index system introduced, and the standings list entered into a computer database in the Federal Office.

When laboriously going through the records, it was found that many on the list were now deceased, or no longer held that callsign, or had not requested an update for many years. Therefore, in compiling this list, it was decided to only list those amateurs whose callsign was current, and who had either applied for DXCC, or had their standing updated, since 1st January 1985

if you are not on this list, or your countries total is not what you believe it should be, please write to me with the details. I am determined to get this list correct, and keep it

VICSPSD	101	VICIAICE	281/265
VKSAFZ	101	VICILI	242/296
VICZAPJI	100/101	VISWO	237/248
VK4KGE	100/101	VK7BC	212/219
VICIPIE	100	WALV	184/190
YK4VIS	0001100	VICIOP	182/183
CW		VK4DP	178/184
VICZGI.	313/359	VK4UC	170/178
VICSOR	313/343	VISSO	180/164
VICEND	312/329	VK4DA	153/154
VICIQI	311/318	WEEKA	144/177
VIC3YL	304/340	VICEADS.	142/143
VK4RF	303/327	VII256	137/148
VICIUS	299/322	WEEKS	128/139
VK7LZ	278/313	VNSA6X	118
VIC2APK	276/303	VICARP	117
VICERU	275/317	VNS6Z	115/116

VICIDH	113	VX4DP	284/294
WC2CWS	106/107	VX3DP	276/277
VK4FB	105/106	VK3CYL	267/271
VK4PX	104/112	VK580	266/301
OPEN		VK3VQ	265/280
VWSHD	323/343	YK40D	255/256
WKARIJ	322/373	VK4AIX	203/204
VK4KS	322/384		176/180
VNSWO	322/356		173
VIC301	372/332		154/155
VICIAIGO	322/330	VK5GZ	139/140
VKSHK		VK1DH	133
VICITY	321/363	VK5AGX	133
ACOUL		VKBNV	127/128
VICARE	310/352	VKSAMU	120/121
VICILIA	314/350	VKSADL	105/106
WESTAME		VKBASD	104
WC/8C	313/319	VK3CDR	103/104
V9(7L7	308/345	VK2KE	100
VICIOR	303/340	VK5ZN	100
VK4PX	299/323		099/112
VICALIA	298/310		A444115
VICZAPK	294/328		159/160
VK486		VK2BQS	109/110
VICESG	292/314		105/106
VICALIC	291/309		
VICAGO	291/294	VICERY	101/102
TRACEOU	401/209		

MCS.II

285/312

### Contests

### Australasian Sprints CW and Phone, July 1992 The Adelaide Hills Amateur Radio Society

Inc is pleased to announce that the seventh series of the annual Australasian Sprints will be held during July 1992.

Both of these contests, which are for CW and phone operators respectively, and are of one-hour duration on 80 metres, are open to all appropriately licensed amateurs in VK, ZL and P2 call areas. As in past contests, a section is provided for SWLs.

The Australasian Sorints are endorsed and co-sponsored by the South Australian/Northem Territory Division of the Wireless Institute of Australia and the Adelaide Hills Amateur Radio Society, and certificates and trophies will be awarded to call area winners and overall winners. Also, a certificate will be awarded to the highest scoring novice class operator in the CW sprint only, provided this entrant is not entitled to another award for the CW sprint

The reasoning behind the concept of the Australiasian Sprints is simple. Most contests are long with fairly complex rules, and participation - except by serious contesters - is tending to diminish. The Australasian Sprints, being of only one-hour duration, are quick and simple, challenging but fun.

### Object of the sprints

The operator's basic goal in the sprints is to make (and SWLs to hear and log) as many contacts as possible, without duplication, during an hour of operation on a single band. Any contact with a VK, ZL or P2 station on 80 metres during the contest period can be counted, but a station may be claimed only 0000

Eligibility: The Australasian Sprints are open to all licensed amateurs, or groups of amateurs, using a single calisign, eg club stations, anywhere in the VK, ZL and P2 call

Contest period:1200 to 1300 UTC, 4 July

1992 (CW only) 1200 to 1300 UTC, 11 July 1992 (phone only, any legal mode)

Prequencles: For the CW sprint, frequencies between 3,500 and 3,700MHz may be used.

For the phone sprint, frequencies between 3.535 and 3.700MHz may be used. Contest call: CQ Sprint or CQ Test or CQ

Contest Exchanges: Minimum exchange for a valid contact will consist of a signal report and a three-digit senal number. The serial number

may start at any number between 001 and 999. but will revert to 001 if 999 has been reached. Logs: Contest logs must show for each contact the time (UTC), callsign of station worked (both callsigns for SWLs), report/serial number given and report/serial number received. Each log must be accompanied by a cover sheet showing the name and date of the sprint (CW or phone), the total number of contacts claimed and a statement that the operator(s) has abided by the rules and spirit of the contest. This cover sheet is to be signed by the operator(s) and personal callsigns added where multi-operators enter using a club callsion. Any special conditions such as ORP or mobile operation should be mentioned in the statement. Any comments you wish to make will be welcomed by the sponsors.

Logs are to be in the hands of the AHARS. PO Box 401, Blackwood SA 5051, Attention: Contest Manager, no later than Friday 14 August, and the envelope is to be endorsed CW, phone or SWL Sprint.

Awards: Certificates will be awarded to the highest score in each VK, ZL and P2 call area for both the CW and phone sprints. Trophies will be awarded to the outright winners of both. A certificate will also be awarded to the highest scoring povice class operator in the CW sprint only, provided this entrant is not entitled to another award for the CW sprint. Certificates may be awarded to other operators whose performance was, in the opinion of the sponsors, exemplary, SWLs: Certificates will be awarded to the

highest scoring listener log in the VK, ZL and P2 call areas for both the CW and phone sprints

Any entry which is clearly in violation of the rules or spirit of this contest, or which contains an excessive number of duplicate contacts (this does not refer to duplicates which have been indicated as such and are not claimed) may be disqualified. The decision of the Adelalde Hills Amateur Radio Society Inc in respect of the interpretation of these rules, the granting of awards and disqualification will be final.

These contests are recommended as a good Saturday evening entertainment. If you have never entered a contest before, here is a good, friendly time to start. Join in and enjoy the fun.

#### **UHF/VHF Field Day:** Correction

I wish to apologise for an error in the results for this contest published in April AR. VK5BW should have been listed as a multi-operator station, the operators being Alan Raftery VK5BW, Andrew Russell VK5ZUC and Tony Denton With a score of 12591 points, VK5BW there-

fore scores first place in the multi-operator section, rather than second place in the singleoperator section. My condolences to the Geelong ARC team, and congratulations to the operators of VK5BW John Martin VK3ZJC

### VK Novice Contest 1992 Rules

### Contest Period

From 0800 UTC 20 June 1992 until 0800 UTC 21 June 1992 Objects of the Contest

To encourage participation of amateur radio stations in Australia, New Zealand and Papua New Guinea, with special emphasis on contacts with novice and radio club stations. Stations Elizabia

Only stations in VK. ZL and P2 call areas may enter. No stations outside these call areas are nermitted to be worked or entered in a log for the purpose of this contest. Except for club stations, no multi-operator working is allowed. Stations in the same call area may contact each other as well as stations in other call areas.

All operations must be confined to within the novice frequency sub-band allocations in the 10, 15 and 80m bands. No cross-band operation is permitted. Novice allocation VK HF 3.525-3.625MHz. 21.125-21.200MHz and 28.100-28.600MHz.

### Modes of Operation

Section (a) phone - novice/full call Section (b) CW - novice/full call Section (c) SWL

Scoring

Por contacts with a novice station - five (5) points

For contact with a club station - ten (10) points For contact with a full call station - two (2)

noints ligramer Section

For novice to novice contacts - five (5) points

For novice to full call stations - two (2) points

For full call to full call stations - two (2) points For any contact with a radio club - ten (1)

points A listener (SWL entry may log only ten (1) sequential contacts made by a station, and then must log no less than another five (5) stations before logging that station again. The five (5) stations so logged need a minimum of

one contact only logged. For phone stations, call CO Novice Contest.

For CW stations, call CQ N.

### Any station may be contacted twice per

band, provided a period of at least 12 hours has passed after the first contact. **Humber Exchange** 

Section (a), on phone. Stations must exchange a serial number comprising an RS report followed by three figures. The figures must commence at 001 for the first contact and increase by one for each further contact.

Section (b), for CW stations. As for phone. but the report is an RST followed by the serial number.

### Log Entrine

Each log should be laid out so as to provide columns in the order given as follows:

Date/time UTC. Band. Mode. Station contacted. Report and serial number sent Report and serial number received. Claimed score. Each log sheet must be endorsed at the top "VK Novice Contest 1992". Total claimed score for each page must be

shown on the bottom of the page. Front Ebeni

### A front sheet must be attached to the con-

test log and must carry the following informa-

Name and address of operator Callsign Station location. Section entered, Score. Declaration. The front sheet must also carry a declaration which states: I hereby certify that I have operated within the terms of my licence, and the rules and spirit of the contest. This declaration must be followed by the signature of the operator, with date. In the case of a club station, the entry must be signed by a responsible officer of the club committee. or a licensed operator delegated by the commattee to do so. In the case of multi-operator stations, the callsigns of participating operators must also be shown on the front sheet. Regulations

### All stations participating in the contest must

be operated within the terms of the station licence and applicable regulations **Entries To** Entries must be posted so as to reach the

Contest Manager no later than 24 July 1992. The address for entries is Novice Contests Manager, WARC, Box 1, Teralba 2284 Carrillicates

Certificates will be awarded to the top scoring stations in each section at the discretion of the Federal Contest Manager Certificates will also be awarded to the top

scoring novice stations in each call area and and to any other entrant where meritorious operation has been carried out in the opinion of the Contest Manager. Trophies

### The Keith Howard VK2AKX Trophy for the novice entrant with the highest apprecate (phone and CW) score, and the Clive Burns Memorial Trophy for the novice entrant with the highest CW score, are perpetual trophies on permanent display at the Executive Office

in each case, the annual winner will receive a suitably inscribed wall plaque as permanent recognition Provision is made for adjudication in the case of a tie

### Operator A person may submit only one contest log

Logs for entries where an operator uses more than one callsign whilst operating in this

contest will not be accepted. Diaquaillication The contest disqualification criteria as pub-

lished annually in Amateur Radio will apply Any station observed during the contest as constantly departing from the generally accepted code of operating ethics may also be disqualified Ken Miller VK2GKM

Novice Contest Co-ordinator

### The Sunshine State Jack Files Mamorial Contest 1952 Objects

 The objects of the Contest are to: a. perpetuate the memory of the late lack Files, a long-time member of the Coun-

cil of the Queensland Division of the Wireless Institute of Australia b. enableamateur radio operators to work Oueensland stations for the Worked All

Queensland Award, and other awards issued by radio clubs in Queensland; encourage mobile/portable operation from the lesser populated towns and

shires in Queensland: d. provide a "warm-up run" for the Remembrance Day Contest.

### Parind

2. The contest will be non over the six hours between 0700hrs LTC (1700hrs EAST) and 1259hrs UTC (2259hrs EAST) on 18 July 1992.

### Sections

- 3 Stations within VK4. a Tx all band. Twenty percent of contacts
- claimed must have been made on the V/UHF bands
  - b. Tx HF phone
  - c. TX HF CW.
  - d. Tx V/UHF only.
  - e, club stations in a to d above, single
  - transmitter: f. mobile/portable stations in a to eahove.
- Stations outside VK4:
- a. Tx all band phone:
- b. Tx all band CW

### Preferred Contest Frequenc

7 100	7 120MHz	7,010	7.020MHz
14.180	14.200MHz	14,050	14.060MHz
2t 170	21 195MHz	21 125	21.150MHz
28.480	28.520MHz	28.125	28.125MHz

### Operation

5. The WARC bands may not be used in this contest. Cross-band operation is permitted only via a satellite repeater, contacts made via a net are not admissible, cross-mode operation is allowed.

6. The contest is primarily for single-operatorstations, but log keepers are allowed. Where two licensees use a single station, each is to submit a separate log 7 Club stations may use multiple operators,

provided there is only one transmitter in use at any one time 8. Home-based stations may be worked

again after an elapsed time of one (1) hour. 9 Mobile or portable stations are not subject to the one-hour rule when operating from a different city/town/shire When operating within one hour from that of previous operations, they are regarded as "new" stations for their own and the contacted stations' scoring numoses. (Different is not to be taken as alternating, eg operations from Area A for 50 minutes, then move to Area B, operate for 50 minutes and return to Area A. would be regarded as alternating, not different). Operations from the same city/town/shire after one hour, regardless of movement within that area. are regarded as home-station operations.

#### Calling Procedure

10. Phone: CO tack Files Contest CO Test lack Files.

### Eighberger

11. Each exchange is to contain the following

- elements a, the location designator, N or S, see
  - scoring: b. the serial number beginning with 001 and continuing in sequence through-
  - out the contest and on all bands worked: c. the "code letters" of the designated city/ town/shire as set out in the attached "Designated Areas and Code Letters".

#### Scoring

12. For scoring purposes Queensland is divided into two zones by the Trooic of Cannicorn. Stations in designated areas north of the Tropic are to use the letter "N" as the first element of contact exchange. Those in designated areas south of the Tropic are to use "S" similarly Example: A valid exchange for scoring purposes might be:

мн 7nne Contact City/town/shire 13. Stations within VK4, phone contacts

a. HF/V/U/HF within the same zone 3 points

h. HF/V/U/HF with the opposite zone 5 points

c. HF/V/LI/HF outside VK42 points

d. ALL CW contacts score double points, ie 6, 10 or 4 14. Stations outside VK4. all phone contacts.

two points, all CW contacts, four points,

#### Bonus Points Apolicable to all Etations

15. A bonus of ten (10) points may be claimed. for the first contact with a city/town/shire. other than the one from which the claimant is operating, over the whole contest. 16. A further bonus of ten (10) points may be

claimed for each club station on each occasion it is worked (one-hour rule still applies). Examples - Phone: A VK4 station in S zone. first contact with VK4000 in Calms, which is the club station of the Green Island ARC Inc. score five points for across zone, 10 points

for first contact Cairns City, 10 points for club station; total 25 points CW: For the same contact, score 10, 10, 10;

total 30 points Stations outside VK4 would score 2, 10, 10, or

4, 10, 10 for phone or CW respectively NB: No further bonus may be claimed for Caims City.

### Logs 17 Logs must show the full name, address

and callsian of the operator(s), the section entered, points claimed for each contact and the total points claimed: a signed and dated statement that the rules have been followed. and the appropriate licence conditions observed. A recommended form of log is: (Assumes VK4SSS is not a club station)

Date		Mode	Call	Me	No		Points		
Time				Sent	Recd	QSD	C/T/8	Club	Te
15/7/9	2								
0834	7.0MHz	Phone	VK4000	S001BE	HO02CS	5	10	10	2
0837	7.0MHz	Phone	WK4SSS	S002BE	S0018E	3			

18. Logs are to arrive at: VK4 Contest Manager T Mulholland VK4AEM PO Box 35

CALOUNDRA 4551 On or before 14 August 1992.

#### America.

19. Trophies will be awarded by the VK4 Awards manager to the highest scorer in each section, provided there is a minimum of five entries in that section.

When you buy something from one of our advertisers, tell them you read about it in the WΙΔ

	Code to D	efine	Cities, Tow lack Files (	vns a	nd st	
BN	Barcon	BO	Etheridae	ET	Mondobbera.	MI
RH3	Barrhionta	BH	Fitzroy	FZ.	Muroon	MY
CS	Reaudeser1	BT	Flinders	Ř.	Mumilia	MX
CA	Belvando	BY	Gatton.	GT	Manuels	MH
GT	Rendernern	BD	Gayndah	GH	Manango	HH
DY	Biggenden	BG	Glengallan	GL.	Nebo	NE
GD	Blackall	BX	Gooboorum	GM	Moosa	NO
GC	Roonah	BV	Herberton	HT	Paroo	PO
Si	Booringah	BO	Hinchinbrook	HK	Peak Downs	PD
GY	Boulia	BZ	Ifracombe	IL.	Pacry	PY
HB	Bowen	BW	Inglewood	W	Pine Rivers	PR
IP	Broadsound	BS	Isis	IS	Pioneer	PI
ĽC.	Bulloo	8P	Isisford	Ē	Pittsworth	PT
MC	Bungil	81	Jericho	Æ	Proserpine	PP
MB	Burka	SR	Johnstone	JÜ	Quilpis	QL.
M	Caboolture	CB	Jondaryan	14	Rediand	RD
RE	Calliope	CL	Kilcoy	ICY	Richmond	RI
RH	Cambooya	CM	Killdvan	IOC	Rosalie	RO
RM	Cardwell	CD	Kingaroy	103	Resenthal	RL
70	Carpentaria	CP	Kolan	100	Sanina	SA
TV	Chinchilia	CH CF	Laidley	LÄ	Stanthorpe	ST
TH	Clifton	CF	Livingston	LV	Tambo	78
WA	Clancherry	CY	Longreach	LÓ	Tara	TA
	Cook	CK	McKinlay	MK	Taroom	TM
	Crows Nest	CN	Mareeba	MA	Tiaro	TI
AL	Craydon	CR.	Maroochy	MO	Torres	TE
AA	Dalrymple	DL.	Milmeran	ML.	Waggambe	WG
AC	Diarrentine	DI	Mirani	MAN	Wambo	MO
AN	Douglas	DG	Mirtam Vale	MV	Waroo	WB

### VHF/UHF - An Expanding World

Eric Jamieson VK5LP - PO Box 169 Meningie 5264

All times are UTC

CHIEVALUS IN

Brisbane Bundaberg Cairos

Caloundra Charters Towers

Gold Coast Goondiwind

Hervey Bas

tpswich Logan City

Mackay

Rema

Allon

Áramac

Arakun\* Alberton Burdekir Baionne

Banana Barcaldine

Maryborough

Reckhampton

Topycombi

Townsville

Thuringows Wanwick

Mount Isa Redeliff

Beacon Notes 50.006 PJ2/OH1ZAA is a new CW beacon from Curacao, Netberland Antilles

### Six Metres in Australia

Some late items were missed last month with the deadline for copy being a week earlier than usual, but they have been included this month.

Pollowing the working of \$D2AG on 26's (reported iss month). Antonne has been a regular signal to Australia Roman Island on 26's (reported iss month). Antonne has been a regular signal to Australia 212, 15, 18, 20, 22 and 25'4' at least. On most occasions he has been accompanied by Inn 3D2PO from Pijl. both with signals to 5x9. On 27's/JsA were nor for most of the day, at 2230 3D2AG to VK5BC, RO, LP, ZDR, ROT and Date VK5B, VK2BE and others, all bleast there on backcautter 31/3 VK5BO at 2309 worked VXFBR at 55's.

On 1/4 at 2315 XE3EB 5x4, also to VK5BC, 3D2AG to VK2, 3, 4, 5at 5x9 with his 100 waits and four-element beam, 24 1100 VK6PA and VK6fQ worked 9K2ZB, probably first VKs to work the Kuwait station 3/4 2340 KG6DX, KG6UH/DU1 and b/s to VK2, 3, 4, On 4/4 at 1000 KG6UH/DU1, 0015 VK8ZLX and VK8RH in conversation, both sidesa widelible here, many JAs. At 0215 VK5BC calling HK0/W6KV, 2330 VK4ZJB worked HK0/W6KV, also CN8ST the day before. 5/4- VK3OT worked the HK0 at 2330 but only in here for about 30 seconds.

7/4 (945 VK6R)C and VK6HK worked FOZZR, 9/4 VK5RC and VK5HY were working John VK4KX at 6200 but no sign of John here that's E6 for you at 0450 there was a mass of signals between 38 and 50MHz plus JAs, who this day had worked VK1, Z. 3, 4, 5, 5 and 7Z. Enormous amount of crud on 50MHz from 9.750 vdeo, culmansing in the reception of Chinese TV by VK5OT and VK5IP around 750 At this turn there were no signals below 46.8, but plenty right up to 56MHz, including 35 on 52MHz, 40819 JAs worked VT3AT At 2204 HK0/W6KV was worked by VK5 50, 50C, 52DR and VK3OT at 559.

15/4 was another good day, many JAs. 1075 VS679 h Lend Here for the first time, 2390 to 2555 3D2AG and 3D2PO worked VKI, 2, 3, 5 and 1, with both neaching 5369 540 here 16/4: 0017 V73AT 459. Was to VK3OT 18/4: 0004 V73AT 459. Was to VK3OT 18/4: 0004 VX3OT and another talking in Spannell, but unable to break in 20/4: 0559 Mike EROJN working split frequency to VK8ZID. At 0400 UZDOWW also split to VK4KK, WK4APG, VK4ZAA and probably others in VK4, also VKSOT, VK8ZZL S so at late seatern Siberia

available 2/64 VK3OT worked 7Q7XX at 1000, which was a good catch. Heard that VK2MQ had worked Chep PJ9EE.

### VK5RO Report

VK5 generally has to struggle to some extent when it comes to sharing much of the DX. However, Col VKSRO reports as follows: 1/4: 2310XE1GE 23203D2PO 3D2AG 2342 called a 9Y? but no contact. 6/4, 2340 W5FF, 2345 heard HK0AR and HK0/W6IKV working to VK and ZL, 0630 to 0905 IAs, 2158 worked HK0/W6IKV at 559 but peaking to \$9 at 2204 10/4: 1321 JA7WSZ, 1325 VS6BG, 1330 V85PB. 15/4: 0723 JA2BZY, 2341 3D2AG, 3D2PO 16/ 4: 0001 K6FV 5x5, 0009 N6AMG, 17/4: 2324 XEIGE 2327 WASLOX 2333 WSIXH 2342 heard Rudi CX2PL 21/4 2252 C6ANY heard working VK2OF, then calling CO, but no takers, 22/4 2343 3D2AG, 25/4 2324 3D2AG 26/4: 0019 XEIGRR, 0024 XEIGE, 0823 to 1004 JAs. Interesting to note the consistent signals from 3D2 and XE, similar situation at VKSLP.

### VX7ZMF Report

I was patitularly pleased to receive a report from Frank VKZMF on the state of six metres from the Tasmanian viewpoint - news from there is usually rather scarce! Frank operates from Anthrus fake at an altitude of 1051 metres (3500 feet) and runs 80 watts to a 10element Yagi with a 14m (45ft) boom and 10 metres high.

19/3. C21BR. 24/3· T3OJH, VK8ZLX, 302AG 26/3· 3D2AG 27/3 C21BR 31/3· 3D2AG, VK4TJA 24/4· 3D2PO. 3D2AG, KKTJA 24/4· 3D2PO. 3D2AG, KEZHWB 6/4· 3D2AG 13/4 W5OZI, Z13TY. 15/4· Z1A, 3D2PO. VK4s 21/4· XEIGRR, K6TV. WB6BYA. KGQXY, UZOCWW. 23/4 N6XQ. All contacts were SSB and SZ to S9 Quite a good effort for a lutle over a month.

Frank adds some comments on a matter which has also been of concern to me for some time and reported in my notes. I think I should quote him - Some of the contacts I hear organised on 28.885MHz are highly suspect I have beard many exchanges of signal reparts and callsigns, grid locators etc. They go to a 50MHz frequency and, it seems, if they bear a noise (any noise), that seems to be regarded as a contact with the details bassed over on 10 metres Recently I beard signal reports passed to a station who replied he wasn't' transmitting, but that didn't appear to affect the results, eg., a two-way contact on six! These contacts are very annoying to the people who have genuine contacts and put a lot of time and effort into the band. That's enough of my whinge, at least I know none of my contacts is a phost!

The above problem may not be widespread, but it is a puty that it should appear to be occurring at all, and also it is not only confined to VK.

### **Bulletin Board Information**

Courtesy of VK5ZBK, the following received via BBS - 2/4 YC0LIVO and YB0LISI at 1515 worked VQ9JT, QSL via K5DIY or VQ9 bureau, 1522, 9K2ZR, OSL via K8EFS: 1553: 4S7/JA1OEM, OSL via home call, 6/4: HISTG advises from square PM36MX that his 6m gear has been re-activated - first day 27/3 resulted in a good opening to VK and P29 using 10 watts and a five-element 10m monoband Yagi with a VHF nuner! He says there are many 6m rigs in Korea, but most do not take the band seriously and use it as a local "intercom". He says to check 52MHz FM as that is a known "in country" intercom frequency, 7/4: Special call - ZS7OSAN 50.120 SSB, OSL via buro or 2S7OSAN, Box 14, Honeydew, 2040, South Africa

### Presenting the VK6PA Saga

A massive report of stations worked bas arrived from Steve (VKGA as Karatha, and I have tirid to present it in a concise manner as think the information should be included in the columns, at least for posterity. It also indicates what an incredible location he lives in, especially for contacts to Sumper, a good precruiting of those shown have been made using \$50 and with many signals 5:50 both ways and some station have been sing for a summary of the state of the state

28/1: 1108 to 1236 - DJ1, F6, DK5, F1, DJ2, PA2, LX1, PA0, ON1, G7, FC1, PE1, G3, SM7, G4, SM6, GI0, OZ1, SK7, PA3, G4, ON4, F6, JA5, 24 call areas for a total of 44 contacts in 11 countries, most on SSB and many at S9.

29/1.1114 to 1330 - ON4, G7, G3, GJ4, OZ1, GW3, G4, PA0, F1, G6, OK1, DL8, ES5, SM6, DF9, G1, SM7, OZ7, DL6, OH2, PE1, DJ4, DL1, DL9, DK6, PA3, JH4, 24 call areas for 34 contacts in 13 countries.

5/2: 1215 to 1238 - G8, GM0, G3, ON4, PE1, G6, PL1. F1, eight call areas for 12 contacts in

6/2 to 12/2, F5, JA2, JA1, VS6, G3, DJ8, PA0, G8, ON1, AH6.

14/2 0805/c 1557-YU3, YU2, N3, YO3, L2 68, SM7, OZI, G1, PEI, G3, PAQ, ONA, PA, OZ4, GJ4, F6, DJ9, OZ5, G4, SM1, D18, D16, OZ8, OZ5, G6, PA2, OZ1, DK7, PC1, L89, OK1, LA1, F1, DK2, PA2, DJ1, SM6, OE5, G7, DL7, ON7, DJ9, P8, HL1 and 16 JAs, 51 call areas for 106 contacts in 16 countries.

16/2: 0811 to 1152 - DF7, OK2, OE5, OK1, E55, LA3, OZ2, FC1, DK8, SM7, OK3, IK2, 57 call areas for 128 contacts in 20 countries. 17/2: 1050 to 1113 - DIA, PAZ, DKZ, LA9, DJ3, OZ1, DJ4, PA3, DL1, DL2, PE1, PA0, DL9, G1, DJ6, DL5, OZ8, DZ4, G10, OZ7, OH7, G3, F1, G8, OH3, GM6, LA5, OH2, G0, G7, DK7, OZ3, SM5, DP8, OZ6, GW6, 36 call areas for 43 contacts in 12 countries.

18/2 0829 to 1227 - PA.2, OH3, OH2, ESS, OH1, O28, SM7, OZ7, PA0, GJ0, SM6, FC1, G3, SM6, JA4, JA3, JR6, DR8, D16, SR0, ON1, ON5, D19, PA3, DJ4, G9, O22, O26, D18, PE1, DL1, DX7, SM7, O21, G7, DR9, G6, DP9, G8, DK3, O21, G2, O22, O26, D18, G9, ON3, 48 call areas for 93 contacts in 12 countries.

areas for 93 contacts in 12 countries. 19/2 0800 to 1249 - DJ1, YU3, FC1, OE4, OE5, IK1, DK2, DK8, DL7, OZ8, G3, PA0, PA3, G7, G4, PE1, G0, G2, DF7, JN6, F6, JA7, JA4, 23 call areas for 33 contacts in nine countries.

20/2: 1206 to 1310-LA9, SM6, G3, G4, OK1, GW2, DL8, SM7, PA0, G6, PA3, G7, DJ1, G8, JE6, JH3, OE5, ON4, OZ2, OZ4, 21 call areas for 25 contacts in 13 countries.

22/2: 1058 to 1141 - ON4, PA3, JA2, J36, F5 Must have been a poor day!

23/2.0957 to 1152-G8, G7, G3, G1, G4, G6, G0, GB5, JH1, 9H1, 5B4, JA5, SVI, CT1, G11, G14, GM4, G17, G18, PE1, G0, PA3, DF5, 23 call areas for 52 contacts in 10 countries.

2/4: 9K2ZR, P29CW, VK4JH, JAs. 3/4: 9K2ZR, V56WV. 4/4: KG6DX, 2D2AG, VK6X VK2s, VK3DUT, KH6s. 457/JE10EM, SYULN. 5/4: 457/J310EM, 9K2ZR, 7K2AZA, V56XMQ. 7/4: KG6UH/DU1, NI6E/KH6. End of information.

It is of interest to note that at times Steve was making five and six contacts per minute, many times four to the minute - it would be hard to do better under HF contest conditions. With stations appearing at that rate, one wonders how he ever found a clear spot at the other end. We tall for wall-to-wall JAs at times. Steve must have had Europeans in the same manner.

Steve VK6PA appears to have had his first of DX contact on 2/4/90 with VS6XMQ, he then got into the act properly on 1/3/91 and, in 13 months since then, has worked 57 countries and appears to need only Africa for WAC Between 271/92 and 4/4/92 he has worked

46 countries They are: VK, JA, DF, P, PA, LX, ON, G, SM, GI, OZ, GJ, GW, OK, ES, OH, GM, VSG, AH6, YU, IV, YO, LA, OE, HI, CT, 9H1. 5B4, SV, HB9, XCG, JD1, DU1, V85, BT, KGC, Y23, JT1/B, SD2, PJ2/B, PYO, VXSCK, JD, KE, P29 and 457. Any challengers for a better score in 1992

### The UK Report

From Ted G4UPS and Geoff GJ4ICD Jean FSDX was active as TM6CHU, from Chausey Island - locator IN96CU - to early March, 29th to Jean Claude Bernard, 2 Chemin d une Ruelle A L Autre, F-95300 Pontoise, France.

OSL for Bob 9K2ZR is via K8EFS and for 9K2WR via his XYL N6UXB Germany: Six hundred 6m permits have been issued to German amateurs with 50,080 to 50,400 allocated. Power limit is 25 watts to a horizontal antenna Lesotho: Ray 7PRSR is active from square KG31 - OSL to Ray Schenkweiler, PO Box 333, Maseru 100, Lesotho, Diego Garcia: fason VO9IY in MI70 commenced operating on 24/3. OSL via his home call of KB7CDA. Vladivostock area: Information from Kan IA IBK reveals that Mike EKOIA is likely to be found around 2000-2200 on a Saturday morning when the local TV station is off the air for eight to 10 hours. (This would indicate monthly from 18/4 onwards, being the time he and UZOCWW were first worked in VK .. 5LP)

Between St 3 and 397.5 African stations were flooding into the U.S. and Bumpe- is pass like the JAsdoto VV, Sattions heard voiced enduded SAGAU, 255(90, 2525N, 2550, 255NW, 255WB, 255W

South African stations operating, plus a few other exotic call areas from Africa. It seems there are still countries for VK stations to work.

### The Higher Bands

Ron VX3AFW sends a lengthy report on band activity on 144, 432 and 1296MHz for the past four months. This indicates a reasonable degree of activity between VX3 and VX11, 2, 5 and 7. These are the highlights Ron had his first QSO on 1296MHz when he worked Gil WX3AUI on 31/12/91 Has ng was the VX5 ku, and running 100mW to a 24-element DLGWU Yasi.

On 12/1/92 he went portable on Mount Buller for the VHF Picld Day and worked VK1, 2,3,5 and 7 on 144 and 432. On 1296 he hard VK3BBB, VK1BG, VK3KKW/P and worked VK3EUV. On 26/1 VK1BG reported working WC2BKS at Voting and VK2BE in Sydney on 1296 27/1 Arie VK3AMZ conses NDB from Longreach on Es, but unable to raise any VK4 2m stations

3/2 Plenty of auroral activity on 144. Ron worked VK3YIR, VK3HO, VK5NC, VK3ELV, VK7XR and VK7ZIG Another aurora on 10/2 when VK7XR copies VK2RSY and VK5VF heacons on 144, but no contacts made 26/2 David VK3ATITI consed VK5VF and VK6RTW beacons via tropo on 144

7/3 Special trip to Mount Buller by VK3AFW, now with six watts on 1296, in an effort to work for the first time from VK3 to VK1 Conditions were appalling - could not trigger the Mount Ginini Canberra 2m repeated Nothing on 432 or 1296!

Ron tried again on 13/3 and worked VK2BFK/Pand VK2WG/Pon 144 On 1296he worked VK3AMZ and then VK1DO/1ACA/P on 1296 tropo for the first VK3 to VK1 contact on that band. John VK3ZJF copied VK2BE on 1296 On 21/3 from Mount Buller VK3AFW worked VK1RG on 1296 during the period 2215 to 2245 which gave him the first VK3/P to VK1 home station on 1296, VK2BE in Sydney was also copied. John VK3ZJC was reported working VK2BE on 1296 2 x CW for the first VK3/VK2 contact on 1296. On 24/3 Ian VK1BG worked John VK3ZIF on 1296 at 1115 for the first home station to home station contact on that band, 519 both ways and using aircraft enhancement, 31/3: On 1296 SSB VK1BG worked VK3AMZ and VK3ZIC worked Eddle VK1VP at 5x8, both contacts via aircraft Well done to all concerned. These are all good contacts mentioned in this paragraph; it seems a pity they lack UTC time, distance, locations and often signal reports, as they are worth recording for the future.

### Six Metres Standings List

Those operators wishing to upgrade or add to their lists should have their information on my desk by 25 June, please - in time for the August issue New entries are always welcome

#### Closure

Space is a bit scarce this month, so will close now with two thoughts for the month-The family fireside is the best of schools and A man begins cutting his wisdom teeth the first time he hites off more than he can chew! 73 from The Voice by the Lake.

Sign up a new WIA member today use the form on the reverse of the AB address fivsheet.

### **Pounding Brass**

Gilbert Griffith VK3CQ - 7 Church St Bright 3741

"While browsing through the local newsagency the other day I came across a paperback book by Hugh Atkinson called The Longest Wire, so I bought it. The story is mainly a drama, but is based on the building of the overland telegraph between Adelaide and Darwin and is set in the early 1870s. I was a little disappointed that there was little or no reference to Morse Code as such, but it was a good varn all the same. The many pitfalls encountered will amaze you."

I found the above in my notes for March 1989 and began wondering if anyone out there managed to get hold of a copy of The Longest Wire

The ABC national radio station recently ran a radio play version of this story, which some of you may have heard. I seem to recall it was on a program called Songs and Stories of Australia, which is on ABC FM each Friday at 11.30am. You will no doubt remember it mainly for the songs done in "country ballad" style To cut a long story short (if you think this is boring reading it for the first time, how do you think it is for me . who knew about it before I wrote it down) I have sent off a letter to David Mulhallen to see if he will send me a tape of the play, and whether ABC can run it again. So keep watching and I will let you know if and when it will be on. Conversely, if you happen across anything

interesting, please let me (us) know. Back in January you will remember I featured some excerpts from the Marconi School of Wireless pamphlet. In the pamphlet the space between words was given as "five dits". This prompted a couple of fast responses to tell us all that the space between words should be seven dits. What I would like to bring to your attention is the small fact that the article was taken from a teaching sheet which was written in the early 1930s, as well as being a "telegraph" teaching sheet. And, if we are going to haggle over two dits out of five or even two dits out of seven when hardly anybody could tell the difference in practice, then try the following on for size. It is taken from an article by Bill Welsh W2DDB, in CQ magazine, August 1979.

### Dit-to-Dah Relationship "The dah is generally said to be three times

as long as the dit.

"This relationship holds true only at about 15wom. The length of the dit is constant, it is the time required to lift the wrist after depressing it to send the dit. Since it takes about the same length of time to depress or raise the wrist, the spaces between dits and dahs in a symbol are about a dit length. At a code speed of about 2wpm the dah is commonly about six times the length of a dit, and it shortens to about five times the dit length at 5wpm. The dah length is reduced to about four times the dit length at 9wom, and is about three times the dit length at 15wom. The dah is about twice as long as the dit at 35wom, and is reduced to about 1.5 times the dit length at 55wpm

"The dit length does not vary in good code, nor does the space between dits and dahs in a code symbol. The dah length does vary with the code speed, as does the space between words. The snace between words is basically twice the length of the dah being sent, plus one dit length. If you are sending code at 5wnm, the space between two words should be about 11 dits long, and it is most easily obtained at this slow speed by taking your hand off the key between words. Good code sounds smooth and pleasant at any speed. Expend the time and effort required to develop good receiving and sending capabilities. Give yourself the option to operate code whenever you wish to do so; don't be forced into other modes of operation due to poor code ability."

While rummaging through some old files I came across some data which may help if you are considering putting up a new antenna

One of my favourite antennas, which has been up for about six years so far, is a 80/160m trapped dipole that still works well. It was originally to be a multiband dipole, but it proved impossible to tune to the exact bandsegments I wanted on each band.

Anyhow, here are the requirements for making up the traps.

The formers used are simple lengths of plastic plumber's pipe, the 3 55MHz trap uses pipe which is 44mm QD, and all the others use 32mm OD pipe The coax is cheap RG58/U. The method is firstly to drill a hole near one end of the former through which the coax is threaded, wind the required number of turns. and drill another hole to thread the coax through Don't forget you need to wind one trap left-handed and one right-handed for a balanced dupole. A sustable amount of each end is then bared, remembering the inner of one end has to join up with the outer braid of the other end, and that this join has to be made inside the former tube. If you have not already done so, drill a hole near each end of the former through which you can tie the antenna wire legs, before connecting them to the coax ends If you want to tune the raps, you can do so by spreading the cold slightly I'm sure you can figure out the rest of the details, for example, my 80/10 dipole has the normal 66 feet of wire in each leg (which you name up fram), then the 3 50MHz trap, followed by another then the 35MHz trap, followed by another meires. Theory says you need to add 60 feet per side, but I found the traps 'presence sequired cutting a fair amount off that 60 feet in order to tune the antenna. Here are the measurements for the coils of

3.55MHz trap 21.25 turns on 44mm 00 7.05MHz trap 14.5 turns on 32mm 00

10.1MHz trap 11 turns on 32mm 00 14.0MHz trap 8.5 turns on 32mm 00 The formula Lused for finding the length

The formula I used for finding the length of wire in a dipole is 468MHz in feet. If you want to convert to metres you can do it yourself: 78a. Gill

**Education Notes** 

Brenda Edmonds VK3KT – WIA Federal Education Co-ordinator PO Box 445 Blackburn 3130

Elsewhere in this issue readers will find the draft of the revised version of DoTC brochuse RIB71 Under an agreement between the WIA and DoTC it is being published widely so that all amsteurs will have the chance to read and, of they so wish, comment on it before it goes to the final printing. Please note the closing date for comment or the reach DoTC for comment or the reach DoTC.

tor comment to reach DOTC.

This revision has greatly simplified the regulations under which the Amateur Service operates. After extended discussion and negotiation, a number of the requirements which we have observed for many years have been deemed to be part of the self-regulation which is expected of a reaponshible body of operators. In the current moves towards devolvement of authority from DOTC, it is seen as appropriate for many matters which concern amateurs to be managed by amateurs.

In addition, this revision makes provision for extra privileges which have been sought for some time by the WTA, including the Codefree Novice licence, or Novice Limited grade, and increased permitted power for combined calls on the HE bands.

No doubt some members will disapprove strongly of a new, "lower" entry level licence, or increased privileges for combined licensees, on the grounds that "Ihad to work for the privileges I hold" or "There will not be any incentive left for upgrading to full call". All these arguments have been heard a number of times over the past few years. The records show, however, that few novice or limited licensees are content forever with their restricted privileges, and novices, in particular, are quick to seek extra qualifications.

Incentives may be needed more to attack me recruits into the hobby than for upgading. In a society where personal communications devices are cheaper and more common than ever before, some members have expressed doubt hat he privileges conferred on a new annatura are worth the effort expended in gaining the little merit of the privileges conferred on much easier to access and to use. To allow a too much easier to access and to use. To allow a then hobby, we need an easy energy qualification, then an enthinateit group of experit-childinges and rewards gained by achieving an unserstricted (Increas.

The nurvival of Amsteurs Radio as a hobby (way of life) invested passion? will depend on the enthusiasm and energy of peneers and future ansteurs, because these will determine the strength of the voice of the Amsteur Service. It was pointed out by one of the DOTC visitors at the recent WIA Federal Convention that the Icenses held by amsteurs comprise less than one percent of the total licences managed by DOTC. It am sure we all consider ourselves much more important than that in the scheme of thinsel

Listen to the WIA Divisional broadcasts for regular AMSAT information.

### AMBAT Australia Newsletter and Computer Software:

Satellite users, whether experienced or newcomers, will benefit by subscribing to the AMSAT Australia newsletter and software service. The newsletter is published monthly by Graham VKSAGR. Subscription is \$20 paytable to AMSAT Australia, addressed as fol-

AMSAT Australia GPO Box 2141

Longe

GPO Box 2141 Adelaide 5001

The newsletter provides up-to-date information on all current and planned satellite activity. Graham also provides a first class software service for satellite users. New software is reviewed regularly in the newsletter

### Satellite server on new packet BBSs:

If you're fortunate enough to have a local BBS that has recently changed over to the new FOFBB board, you've probably already noticed that it has a lot more goodies than the Wolldon or MBL boards. It also appears to be a loc faster in operation.

The satellite server as particularly interesting. It should be very useful in a number of ways. Auto-update will assure the BBS will be a reliable source of up-to-date keps. The satellite descriptions data bank (if kept up to date) will be a good source of info for the newcomer. The tracking program itself seems to be accurate and comprehensive.

All in all it ought to provide good reference data particularly for newcomers to satellite operations who do not as yet run a full-blown auto track and update system.

### Weather satellite report: In the March column I asked for expres-

sions of interest in a small segment on WXsats. So far I've heard from only one amateur. He so in favour. There may be more people interested; please let me know I can't really do it unless there's a lot more interest.

### This satellite appears to be on schedule for

a launch in July 1992. The current target date is 24 July. It is a result of a collaborative educational program by the University of Survey and the Korean Advanced Institute of Technology (KAIT). The device is being built at Surrey by KAIT engineering students under the guidance of the UoSat team

KITSAT-A well have a rather unusual and interesting orbit. It will have a semi-major axis of 7700km and an inclination of 66 degrees. Per run a few figures through the computer and, if this orbital geometry is achieved, we'l have a very useful satellite indeed. An SMA of 7700km results in an mean motion of 12.8491322.

### amsat

Bill Magnusson VK3JT – Packet VK3JT @ VK3BBS

National Co-ordinator
Graham Ratcliff VK5AGR
Please take note of the AMSAT information

nets.
AMSAT AUSTRALIA net:
Control station VK5AGR
Check-ins commence at 0845z on Sunday

Bulletin commences at 0900z Frequencies 3,685MHz or 7,064MHz, At present 7 064MHz is used. AMSAT SW Pacific net: 2200z Saturdy on 14,282MHz. Experienced satellite users and neucomers althe are welcome on the nets. A large body of

experience is on band to answer queries.

Amateur Radio, June 1992

rev/day It will orbit at an altitude of 1324km (822 miles) which is rather reminiscent of the old faithful Oscar-7. It should have an orbital period of 112 minutes and a maximum access time of 21 minutes on an overhead pass. The maximum communication range (footprint dia) will be 7590km. The 660 inclination will take it over just about every populated part of the Earth. At that inclination it'll go across the southern sky quite a lot in VK, so your auto tracking will need to support flip-over or some other way of "tracking through south"

The payloads on KITSAT-A are also of major interest. It will have the now almost standard PACSAT comms system. Running at 9600bps it will use 13mBytes of CMOS SRAM for message storage. If you have a UO-14 (UO-22) system up and running, it will be immediately usable on KITSAT-A.

It will carry an improved version of the UO-22 Earth imaging system with twin wide-angle and tele-lens systems. A first for KITSAT-A will be the digital signal

processing experiment. It will be used for speech synthesis, store and forward speech relay and high speed modulation experiments. The cosmic ray experiment will provide valuable data on the radiation environment and there will be the usual array of UoSat type telemetry which will be decodable on presently available software

Watch for this satellite, it should be a beauty.

### AO-10 keps There was a report recently that NASA may

have discontinued publishing kens for Oscar-10. This is being looked into and should be resolved before too long. In the meantime, don't worry, the keps for Oscar-10 (and Oscar-13 for that matter) will remain accurate for at least six months. You can prove this for yourself by manually loading an old set - say 12 months old - and compare the result. Of course, you can't afford to be so relaxed about the low Earth orbiters. The lower they are the more often you have to update.

older familiar fluorescent lamos do cause radio interference if unshielded receivers. feedlines and antennas are too close. One wonders whether the new lamps present EMC problems. DL1BU mentioned that the new lamps were formerly operating near 3.6MHz, but that apparently the influence of radio amateurs caused the move to 2 65MHz. It remains to be seen whether this change is good enough.

### **EMC** Reports A number of EMC reports published in

Radio Communication were again submitted by Norm Burton. All of us can benefit from the excellent EMC work done by the UK RSGB EMC Committee under the chairman G8SOZ I.I. Radio Communication

### December 1991

"EMC down the salt mine" \$A1 million EMC test centre was established 200m below ground in an air-conditioned tent 35 x 16 metres near Winsford in Cheshire. This was one way to make sure that unwanted RF neither escaped nor got into test equipment

2.2. The flasher units of several motor car models have become known to be far too susceptible to mobile radio transmitters and the radiation from high powered stationary radio transmitters. The recommendation of an American car dealer "to shield the transmitter antenna", was not very helpful, but shows the problem! The problem was solved by connecting two 100nF capacitors from the flasher unit terminals to the car chassis ground.

### 2.3. Radio Communication January THE

Telephone EMC Cure

To overcome susceptibility of electrical devices to legal and unavoidable RF radiation is only half the problem, the other half is find and educate officials of the responsible organisation, who understand the facts, accept the responsibility and are therefore able and willing to solve the problem. It took several attempts by the EMC committee members to get a Post Office official, who understood the problem with a BT-Telephone, to have filters and a different phone installed. Other officials of the Telecom Faults Department had flatly refused to co-operate

### 2.4. Radio Communication February

1992 Testmagazine reports important RF field strength measurements near the Flyingdales Early Warning System in Yorkshire Field strengths of 30 volts/metre on roads in this area and peak values three times higher were also found. These conditions are of great concern to motorists, because modern cars use very RF-sensitive devices for motor and brake operation and the function of associated car equipment, besides the car radio. Car problems have been found with Fiat Panda. Ford Cosworth, Citroen, Vauxhall Cavalier, VW Golf. Blaupunkt Radio taxi equipment operation etc is more or less susceptible to

### FTAC Notes

John Martin VK3ZJC FTAC Chairman

### Records

A couple of months ago I described a new national 6m record set by VK2QF and CU3/ N6AMG as "almost unbeatable" Well, I did say "almost". This record has now fallen to Mike Farrell VK2FLR, who also worked CU3/ N6AMG over a distance of 19424 1km There is also a new ACT record for the

1296mHz band, between Ed Penikis VK1VP and a certain nondescript known as VK3ZIC. The contact was made by aircraft enhancement and the distance is 451 7km.

### Data base update The next publication of the Data Base will

be in the 1992-1993 Call Book The deadline is expected to be in late July, so all beacon and repeater licensees are asked to check the details in last Pebruary's magazine and advise of any changes. The site details, omitted from the February list to save space, will be included in full in the Call Book listing

### Band planning

It is proposed to allot 52.600/53.600MHz as a national WICEN portable repeater channel. Two WICEN simplex channels are also proposed on 53MHz. It is also suggested to allot 434 950 and 439.950MHz for use by WICEN portable repeaters, including packet. These channels are a voice repeater pair, but the use of one or the other for packet would reduce co-site interference between portable voice and packet repeaters Comments on any of these proposals would

be appreciated.

### **EMC Report**

Hans F Ruckert VK2AOU, 25 Berrille Rd. Beverly Hills 2209

### Fluorescent lamp and RF radiation VK4OE submitted an interesting report from

the "Hospital Engineering Connection" paper

on the new Philips Fluorescent Lamp operating on 2.65MHz, operating with increased efficiency and expected to outlast older fluorescent lamps by 50,000 hours. We know the 25W of HF, VHF and/or UHF transmitter

power.
Even 400mW from a 70cm handheld transceiver in one case affected the engine management system. The term EMS, Electro Magnetic Susceptibility, is now being used.

1.5. Hattelies
Eighteen EMC co-ordinators complied the following statistics. Amateur radio operation

File Cana Sx Alams Bx Others 14x

Amateur radio operation interfered in 29

cases like fax machines, power lines, alarm systems, satellite TV systems, computer, digtial phone systems, fluorescent lighting, thermostats, TV masthead amps, radio teleswitches, gaming machines (in restaurants)

Since both sides suffer equally badly, the EMC problems should always be solved in a reasonable, co-operative manner, not by nontechnical legal arguments.

2.6. Radio Communication April

A detailed EMC report covers several cases

of IRF-succytilik-alam systems using Passion Indirected (1918) amount in some cases 70W on 7-280412 tringered the neighbour's new stamm. Ising a different make of sensor rolved this problem. Some firms, like Vosonic Lof (or insert) and Operac Co Lod. claim to have insert) and operac Co Lod. claim to the insert of the control of the control of IGHz. In a different case 5W on a 3.5-76Hz of clopic caused the alam to belop. Several more "alamining problems" are described, showing that the problem can be solved cases by proper engineering on the cases by proper engineering on the

DL 4/1992, page 237)

The Executive of the DARC had talks with members of the Ceman Parliament who are committee members dealing with communication natures. It was absolutely necessary to inform these parliamentarians of the problems caused by the cable TV operation using the radio annateur exclusive 2 missand for charmactures of cable TV. custing interference to anateur acido reception and susceptibility produces the cable TV operation. See the TV operation. See the TV operation.

signal, between a strength 7 and 9+. The usual RA channels of 21525, 21740 and 21775kHz were at their normal levels here, so I checked on my FT707 as well as the Icom R70, and the signal was present on both. So I put in a quick call to the RA offices in Melbourne and alerted them that something could be amiss. About 45 minutes later, I was notified by RA Master Control that it indeed was on that frequency and had been tracked down to the Darwin transmitter site. Apparently one of their senders had been put on the dummy load. They also informed me that it also had been monitored at a DoTC receiving station in Perth (WA) There were a few red faces, no doubt, The efficiency of the dummy load has been questioned, if signals were heard quite well from it at either ends of the continent.

Thave heard another DX program on Radio WWCR in Knoxville, Tennessee. It is on at 1130 UTC on Tuesdays. The frequency is 15690 and it is always very clear and strong here. The program consists of ham radio news from Gordon West, Clandestine Radio, plus a weekly propagation report, and is titled "Sig-

Incidentally, don't be confused by the anpearance of the BBC World Service "Newsdesk" program on 9700kHz at 1100 UTC. It is actually being relayed by Radio New Zealand International. It is a six-month trial to gauge listener response. It is handy for me as the BBC Kranil relay on 9740kYz suffers severe splatter from Radio HCIB on 9745kHz. The Sackville relay to eastern North America also carries the same program on 9515kHz: 12095 and 15070kHz from the UK sites are only fair at that time. The BBC Kiwi relay is about one second behind the UK sites, and 300 milliseconds behind either Kranji or Sackville The Print Handicapped stations also relay the BBC World Service on AM between midnight and dawn local time. Also conceming NZ, an AM network has been established by an entrepreneur to relay the "Beeb"

Well, that is all for this month. Until July, all the very best of listening and 73.

### **Spotlight on SWLing**

Robin L Harwood VK7RH - 52 Connaught Crs, W. Launceston 7250

Well, winter has finally arrived here and reception of European stations is coming in very well on the long path on the major broadcasting allocations. I have noticed though, that the number of simultaneous channels has been reduced, allowing signals from other broadcasters to come through. Even so. I have noticed some broadcasters are utilising the same channel to identical target areas, ie the Pacific coast of North America. Deutsche Welle in Cologne, Germany, is broadcasting in English at 0500 UTC on 11925kHz at the same time as Radio HCJB in Quito, Ecuador. Both are beaming to the same area. The German station is on for only 50 minutes, yet it did not realise HCIB has been on 11925kHz for a number of years at 0500 UTC

and while we are on HCJB to Quito, I have nonced a purious emission from it on 12100kHz around 0800 UTC. Athattume, they nonced as to Europe and the South Facilic on two different channels and presumably are montage somewhere along the lane. The two channels are as follows: 11790kHz from 2700 1700 to 1130, described to the South Facilic Too 1700 to 1130, described to the South Facilic Too 1700 to 1130, described to the South Facilic Too latter channel as extremely strong here, manrally, although 1710 of squite audifile. The other channel of 9794kHz to the South Facilic as always relable on this sare. Bowerer, 15270kHz to Europe varies in level from day

to day.

On 21 April I was tuning across the bottom edge of the 15m anatteur band around 0600 UTC, looking for Europeans on the LF, when I came across a strong broadcasting station on exactly 21000kHz. Naturally, my curiosity was aroused, as I make the IARUMS Co-ordinator for VK7. It runned out to be Badio Australia, broadcasting from Melboure.

There was quite pronounced QSB on the

### Repeater Link

Will McGhie VK6UU @ VK6BBS - 21 Waterloo Crs. Lesmurdie 6076

### True FE

Direct Frequency Modulation of a repeater's transmit crystal results in higher quality audio from your repeater. Included is a circuit to provide up to 10kHz of deviation at the repeater's output.

repeaters output.

This circuit can be used to frequency modulate the transmit crystal oscillator circuit in a Philips FM828 and FM747. These VHF and

UHF radios have almost identical oscillator circuits, and the point X is the same for both. The audio level required varies from crystal to crystal, but about two volts peak to peak is required.

The earth end of the crystal must be isolated from the rest of the oscillator circuit, and this is shown as point X. From this point to ground now becomes the variable capacitance point that shifts the oscillator frequency high and low to produce the FM deviation.

Because capacitance is introduced into series with the crystal, where previously there was none, the oscillator-centure frequency shifts high. To manimuse this shift, four or more varicap diodes are wired in parallel, and the oscillator re-netted by the existing L1 a fixed capacitor could be placed in parallel with plast one varicap, but more deviation for less audio input results from adding extra diodes.

A fixed DX bias is applied to the varicaps via the 47k resistor. This resistor, along with the 100pF capacitor isolate the RF from the crystal to the audio circuit. The voltage source for this must be regulated.

The BB809 dlodes are cheap if you can find them They are a wide capacitance shift diode, some four times greater than the BB102. This means more deviation for less distortion, as the dlodes are operated over a smaller portion of their volkage to capacitance transfer curve.

### **Different Opinion**

Peedback from Gareth VK2ANF makes for Interesting reading. My opinion on cleaning up poor amateur audio before it is transmitted from a repeater, has touched a sore point with Gareth. One paragraph from Gareth's correspondence summarises his position.


"Why should you or I or any other repeater manager clean up someone else's bad signal! If they over-deviate or are off frequency, let them pass through distorted, if they underdeviate, let them sound like they're whispering. It's not our problem."

Even though I'm an advocate of automatic audio gain control in a repeater, I have sympathy for leaving poor amateur audio as such, in the hope that the amateur will correct the problem However, after many years of listening to wide variations in audio levels and quality, audio AGC was tried on a repeater, with pleasing results to the earth.

If amateurs can be convinced to adjust their equipment to produce the correct audio on transmit, to suit their speech level and operating situation, their hilbs is by far the best situation. Unfortunately this has proved to be impossible. The reluctance of amateurs to give reports on the quality and quantity of audio from amateurs they are having QSOS with is the biggest problem. If you have poor audion Received and the contraction of the product of th

and parties up with Because of John arong against hery affects, audic deficiences can be compensated for by the receiving station timing the voltime up and down to sust the wisely differing audio levels. The detenoration is signal to note is not a problem with FM when you have RF signal level to spare—well almost. Some audio levels are so lowy you can run out of volume control and/or the low audio simply staps below the whate note.

Not all the blame for poor audio can be levelled at the amateur, however Some FM



transceivers have difficult-to-get-at Mic gain pots, or insufficient range on the mic gain, or in some cases, no me gain pot at all. Until all these problems can be sorted out, many amateur signals you hear on your local repeater are going to be difficult to read.

If the amateur with whom you are in QSO has low audio, sell him or her. Comments like, "didn't ger much of that", "I must be in a poor location" or "there must be a problem with the repeater" show a lack of understanding of the equipment and operating mode you are using. If the S meter on your receiver is near full scale and you are having a problem with another amsuter's audio, let the amateur know.

Gareth's correspondence contained not only criticism of cleaning up poor amateur audio, but some constructive suggestions on how to improve poor audio.

A test transponder is one idea. Like a re-

parter, it amplicates the other last as a selected as the but he allocated as own simpler, frequency, Stations dropping carriers on its simplex frequency, Stations dropping carriers on its simplex frequency would be rewarded with a digitated voice announcing how much off-frequency they are and their signal strength Modulated stations would get back a peak deviation report and 10-second perly of their audio. Wouldn't that come as a susprise to Several frequence you much the Several frequence you much the Several frequences you much the country have

Several repeaters around the country have some user feedback to let you know if you are off frequency etc. Few, if any, have comprehensive on-air testing of amateur FM transceivers. What a great idea if such automatic on-air testing could be set up in many areas.

Here in VK6, on-air testing has been carried out from time to time. Stations call in and are told their frequency, deviation and, most importantly, mix level. To set up such a test system is very easy. A correctly lined-up transcover, with a discriminator meter and audiocouples to a CIO, are all thai is required. The DC output from the discriminator allows easy cullbration of the sudio deviation on the CRO Frequency Inputs 10kHz high and low from centre frequency can be used to set the vertical gain on the CRO. That is, correct frequency reads center traces on the CRO. The Hz high is set to read 10 positive divisions and 10kHz. us to read 10 this time to reversely the contraction of the CRO. The time the contraction of the contractin

With a little practice at looking at speech wave forms on a CRO, a lot of information about the audio can be interpreted Peak deviation, mic gain setting, type of clipping or compression and frequency response are easily seen.

In a later article of Repeater Link I will include some drawings of speech wave forms of amateur PM signals, both good and bad. The level variation between amateur FM signals may come as a surprise to you, but audio level differences of as much as 20dB - yes 20dB - are not hard to find.

It is important to understand that these are audio differences, not RF differences. RF 8ig-mal level has no bearing on audio levels in a frequency modulated system. An Sphus 50dB signal will have the same audio levels as \$1 signal, provided the transmit audio mec gain and deviation are set up correctly. There is also no ACC in an FM exceiver the three is no need. As has already been stated, RF level has no bearing on the audio level you hear out of the loud-speaker.

I may be talking down to most FM users, but listening to QSOs on repeaters from time to time, there is a need by some of us to better understand the Fun Mode

### Intruder Watch

Gordon I oveday VK4KAI - Aviernore, Rubyvale 4702

March 198					
Freq	UTC	Date	Mode	Comments	X
7002.5	1220+	020391	A1A	V beacon	17
7048-9	1040+	230292	AtB/A1a	UHF3 last hrd 28/02 (D at end	6
7080	1235	030292	A3E	B/c news & music. Asian?	2
14004	1103	030392	-	No ID but series of V hrd	
14005	1915	190392	MON	Plus A3E male voices	
14045.5	1300	Daily	2 x LSB	Dialling tone & carrier	39
14058	0843	080292	AC3/NON	Helschreiber fax Ching?	24
14063	080D+	230292+	PON	No further info	20
14070.5	mni	daily	A1a	VRQ tic to VBX on freq	24
14075	mni	dally	ATA	VRO tic & calling CO	42
14075/80	mnl	daily	A1A	KFB CQ de KFB as PHL QSV K	13
14092	0715	280292	A1A	RG177 940 BT DDD coded msg	3
14095	0200/5	090392	A1A	VPC, CQ de VPC as may QSV	14
14100	0936/40	mni	A1A	ZBK de MZB QSV K tlc out	17
14174	0820	020392	A1A	XLV + H/S data, 3kHz wd sm freq	1
14177	0933	280292	F1A	UID80 & PL7 tfc	5
14190	1300	070392	PON	Motor-beat abt 20kHz wd	
14210	mni	daily	A3E	bc2 of 7105 R Espana/splatts	23
14211/15	mni	0203+	2xF18	Both 250Hz 3rd register, CIS	18
14215	mni	290292	A1A	P7A from P9K QSA?QSV K	13
14217.5	0815+	230292+	F18	UMS vry active, 200Hz, MNR, CIS	17
18068	0940	110292	A1A	PTA1 vvv CQ de PTA1 pse Q\$0 ZHG	
18080	1242	290292	A3	B/cast Chinese	
18105	1205	260292	A3E	Weak b/c station no ID	
18119	1033	010392	A1A	89D calling CO QTC	1
18125	1210	260292	A3E	B/cast stn Russian?	3
18135	0744	090392	PON	OTHR	
18140	0935	020392	A3E	B/caster, m announcer??	
21001	0400+	250292+	NOM		22
21031.5	0040	240292	F1B/A1A	Tic to UUU UMS in cw +5figs	39
21085	2039	110292	F1B/A1A	RTTY idling	2
21230	0500	110392	PXX?	Points to Black Sea area	
21250	1000+	250292	R78	4kHz wd	3
21283	0400+	230292	A1A/F1B	Most 200Hz tic to UU UMS	47
21315	1100	260292	A3E	B/C carrier & voices	13
21340	1104	300392	A3J	Radio Pakistan	
21326	0507+	270292	A1A	P7A FR P8S WSA?QSV R QRK 4RF	16
21369	0605+	160392	A1A	P7A de P8V R RF2 W AS	19
21450	1255	010392	A3E	English b/cast, Rad Mescow	12
24895	0637	020392	A3	Chinese military	4
24925 24970	1158	030392+	J3E/L	Russian military stn	7
	1108	120392	A1A	de Q1DT, de Q1DT??	_
28004	1320	1303	A3E	Pyongyang Nth Korea/music	2
38035	1352	1303	A3E	Identical to above	_
28980	1206	110392	A3E	Chinest b/c music	6
29370	1335	130392	A3E	Russian language b/cast	
		Hz at S9 from V			
CIS - CW	eaith indebeni	dent States, for	nerry USSR.		

found after several phone calls, so it was left as a two-person team. On Saturday at anproximately 7.40am. I volunteered my services, keeping in mind we would have to take the children. Hesitation on OM's part. I decided to do some last-minute shopping for the family's Mother's Day luncheon. I left at 8am. returning 25 minutes later, having been to the butcher, greengrocer, bakery and supermarket. On my return we decided to go.

We were due to be at Greensborough at 9am (15-minute drive) to fit the doppler, antennas and radsos. Philip decided to do some "just in time" engineering of a shelf and I packed the nappy bag, lunch and children. We got to Ewen's only 10 minutes later than expected, to find his son was coming, too, for part of the day.

While the antennas etc were being fitted. I fed Kate (nine months old). It was a case of breathe-in and seat belts on, and we were on our way Upon our arrival we registered under my callsign. There were a few bemused looks at people discovered our car half full of people under the age of seven

We had our fair share of equipment malfunction, mis-navigating and failure to find the fox. The hunt before lunch we broke the antenna pole, so dashed back to Ewen's place for some running repairs. Upon returning to the starting point we discovered the lunch break had been shortened and the 2m sniffer hunt was in progress. We missed by 10 feet.

So our day continued with more or less success, and the same could be said for the local ORM. Barry (age three) at times preferred the play equipment. (Thank you to Brenda and Bey for keeping an eye on him!) On the last hunt we should have gone over the river (90 per cent of the time that is what the fox does), but we didn't and, consequently, discovered our error too late

Each event was awarded 1st, 2nd and 3rd place with a choice of prizes. We finished with four sheets of circuit board and 241 resistors The final result overall to the VK3MDR team ... 2nd I still have the grin on my face. It was take-away for tea that night: the week's rou-

tine is in shambles, but we had a ball! I can still remember our first attempt at the championships several years ago. With borrowed equipment 10 minutes instruction, no children and one dog. We came ... last. So we have improved.

Cheers for now, Jenny VK3 MDR

### ALARA

Jenny Adams VK3MDR – 70 Kangaroo Ground Rd. Wattle Glen 3096

My thanks to VKs 48G, 40D, 4AKX, 48HJ, 4BTW, 4BXC, 4EKA, 5TL, 5GZ, 6LG, 6RO & 6XW.

The Victorian Foxhunting Champions On the Friday night, the decision was made

to compete. The team consisted of only two people; a third was really needed for map reading and navigation. Nobody could be **Amateur** Radio Helping the community

### WICEN - NSW

### Dave Horsfall VK2KFU, NSW Deputy Co-ordinator

WICEN Sydney North held a committee meeting recently, the first since the election of office-bearers, and some of the activities for the year were discussed.

The date of the next WICEN Sydney North general meeting will be Wednesday 24 June at the Ku-ring-gal SES headquarters, starting at 8pm. The latest developments in Sydney North will be explained, including first-aid training, bushfire training and a "hands on" exercise to be held on Saturday 27 June. A committee meeting of WICEN Sydney North will be held the Wednesday before, 17 June, at the home of Jo VK2KAA at 7 30pm.

Listen to the Sydney WICEN net on the 2m repeater VK2RWS, channel 7150, every Thursday night at 9.30pm, for more details of Sydney WICEN happenings.

ing an account of that member's contribution to the chih

The afternoon concluded with a well catered afternoon tea and an expression of thanks to all attending by secretary Denis VK3BGS. The honoured guests are shown in the photo

### Successful Namiest

The new venue for the Moorabbin & District Radio Club Hamfest at the assembly hall of Brentwood Secondary College, held on 2 May, was crowded by 500 or so eager buyers, sellers and other interested visitors.

Demonstrations of ATV and packet were given from time to time. The club had its various projects and kits on display and found the interest very gratifying

Allan Doble VK3AMD

### Barossa Amateur Radio Chib On Sunday 5 April 1992, the Third Annual

Mt Pleasant Radio Picnic Day, hosted by the Barossa Amateur Radio Club, was held at the

Talunga Park Showgrounds at Mt Pleasant. This year the event was upgraded from amateur radio only, to an event that covered amateur radio, CB radio, vintage radio and many other forms of radio-related activities. The biggest change was the participation of ACBRO in the event, ACBRO actively publicised the event to its members, and on the day provided a display of CB and vintage radio. A very large number of CB operators attended on the day.

The event was sponsored by Dick Smith Electronics and Castrol Australia, as well as by minor sponsors Countrywide Mobile Communications, Electrophone, Johnston Electronic & Audio Visual Services, WIA Equipment Supplies Committee and ZCG Antennas.

The weather in Adelaide on the day before the event and also on the picnic day was fairly wet, and this possibly reduced the numbers that attended. Even considering the weather, a total of 450 people still attended the event. Activities got under way with a 2m foxhunt

which was won by Andrew VK5EX from the South Coast Amateur Radio Club, and finished with an interclub tug of war which was won by a joint team consisting of members from ACBRO clubs. Throughout the day there were many ac-

tivities for both adults and children alike, with prizes in excess of \$1000 for the winners. A raffle with prizes totalling \$500 was also held

The day was a good opportunity for bargain hunters to save money on both new and second-hand equipment

New equipment at substantially reduced prices was available from Dick Smith Flectronics. Countrywide Mobile Communications. Johnston Electronic & Audio Visual Services. Microwave Developments, WIA Equipment Supplies Committee & Bookshop and Stewart Electronic Components.

### Club Corner

### Moorabbin & District Rudio Club

Life members honoured at M&DRC On Saturday afternoon 28 March, 70 mem-

bers and friends of the Moorabbin and District Radio Club gathered at the clubrooms for a function at which 15 life members of the club

were presented with newly created life membership certificates and badges.

Peter Gamble VK3YRP.Federal president of the WIA, was a guest and made the presen-

As each presentation was made, Trevor VK3MGD and Ken VK3TKR alternated in read-



Back row: Trevor Armstrong VK3MGD (Vice President), Ken Millis VK3TKR, Keilin Turner VK3CWT (President) and Denis Babore VK3GGS (Secestary), Centre row: Pales Camble VK3YRP (Federal President, Wila), Harold Hepbus VK3AFQ, John Emery VK3UA, Allan Doble VK3AMD, Morrie Lyons VK3BCC (Tressured, Rober Thomas VK3BC) Lan Jackson Harold VK3BC (Lan Jackson Harold VK3BC) (Lan Jac UMF, Roger Thomas VK3RG, Len Jackson, John Dawes and Doug-ris VK3CGY. ent row: Bill Yates VK3SB, Alf Chandler VK3LC, Ed Wasifeld VK3EM, Bob

, Milton Crompton VK3MN, Ray Fowler VK3BHL and Percy Sebire

A large area was set up for buying and selling used equipment. A large number of people were seen leaving with lots of newly purchased goodies under their arms.

Several groups and individuals provided displays covering GT radio (ACBRO), vintage radio (Historical Radio Society of Australia), vintage military radio and miscellaneous equipment (several individuals), Outback communications (Royal Flying Doctor Service), vintage military vehícles (individuals) and ALARA.

Planning is well under way for next year's event on Sunday 28 March 1993. This will be bigger and better than this year, and will be housed in the Agricultural Pavilson, which is equipped with 60 permanent trestle tables, thus allowing for a greater number of dealers to take part. Other activities will be held in the Main Pavilson, with any overflow isto the

Sheep Display Pavilion. A major outdoor electronics display is also planned (details to follow).

Having the majority of the displays and trading tables inside the various buildings within the showgrounds will ensure the weather will not deter people from attending. For those who wish to plan ahead, the

For those who wish to plan ahead, the dates for forthcoming Picnic Days should be 27 March 1994, 26 March 1995, 24 March 1996 and 23 March 1997.

Any dealers who wish to participate in the 1993 event can obtain a dealer registration form from the Barossa Amateur Radio Radio Club. PO Box 356. Angaston SA 5353.

The club president, Sieve Johnston VK5ZNJ can be contacted on (08) 287 1064 or fax (08) 287 0422.

Steve Johnston VK52NJ President BAPC ar

### **QSLs from the WIA Collection**

Ken Matchett VK3TL Hon Curator, WIA QSL Collection 4 Sunrise Hill Road, Montrose 3765. Ph: 728 5350

### Danzig - and what's on that sld QSL card? Part I

Ask most of the younger generation where Danzig is, and one would be met with blank faces Mention the Polish name of this city, Gdensk, and most would recognise is as a Polish shipping centre and the birthplace of the Polish trade unon movement, Solidariny, Danzig (to give it is German name) will be remembered by per-van/Ziers, since inhose days it was a separate "country" for the preman YCC.

war DXCC From Slav origins, the area of Danzig was taken over by the Teutonic Knights, a military order that enforced Christianity during the Middle Ages. As a prosperous port, Danzig gained its autonomy as early as the 15th century, and when Prussia became a powerful European state, Danzig was ceded to it. With the conquests of Bismarck, Danzig became the capital of West Prussia, but after the end of WW1, gained its free city status again under the Treaty of Versailles. It is interesting to note that the major excuse for Hitler's invasion of Poland (with no fewer than 54 army divisions) on 1 September 1939 was the German claim to this territory and the refusal of Poland to yield up Danzig as a free city within the framework of the German Reich. After the end of World War 2, the German population (approximately 90 percent) was deported and the territory resorted to its Polish name, becoming part of post-war Poland

Under the terms of the historic Washington Conference of 1929, callsign prefixes had to indicate the country from which they originated. The prefix block YMA-YMZ was allocated by the ITU to the "Free City of Danzig". Experimental radio licensees were assigned

Experimental radio licensees were assigned the specific prefix of "YM" by Danzig authorities. The latest listing the writer can find is that appearing in the January 1940 issue of the magazine Radio just after WW2 had started. (The LISA was not then at war). Danzie continued to be listed in the December 1946 edition of Amateur Radio, but the listing was only a guide since, at that time, decisions concerning post-war country listings were just being made. The "Official" Post-War Countries List of the ARRI, appearing in the February issue of the 1947 OST, omits Danzig. It would be fairly safe to say there was no amateur radio activity from Gdansk (Danzig) just after the war. In fact, almost the whole of the city had been obliterated and had to be entirely rebuilt. When transmissions from the city resumed they were accompanied by the SP (Poland) prefix.

### YM4Z0

The conver of the station was Herr Bussler, a successful Dx Operator and what the Germans called a "Deutscher Sendemeister und Enfangsmeister" in 1955-56. (German transmitting and receiving muster or expert). Herr Bussler won many awards and DX contests before the war, inchading WMA 1954, 1955 and 1956 awards. He used no more dama 56 watts input. The recipient of the QSI. was Chas Institution of the Control of Bellerier, Insamania, a stanistica VIXCI of Bellerier, Insamania, a

Harrisson VK7CH of Bellerive, Tasmania, a truly Old Timer, who is still active on the air. The QSL is dated January 1934 and gives a signal report of T9 W4 and R4. The T (tooe),

W4 (strength) and R (readability) code was used extensively on the Continent before 1935 by German and Austrian stations in particular. The code order of RWT was however much more normar than the TWR seen on this OSI. card. Many stations throughout the world during the early and mid-1930s were using the signal indication of OSA-ORK-Tone. The O code OSA from the early 1920s meant "Are my signals strong?" The ORK meant 'How do you receive me?" Sometimes OSB, meaning "Is my tone or spark bad?" was used but, as we know, today it has an altogether different meaning. In the April 1934 edition of OST. Arthur Braaten W2BSR presented a paper in which he suggested the simplified code of RST, which we all use today. Unfortunately this took a little time to get used so, some operators using OSA-R-T, effectively changing the meaning of OSA from a strength indication to one of readability. However, the new RST system proved very popular, especially after the ARRL HQ station W1MK adopted it from 27 September 1934.

The time of the OSO is indicated using MEZ, a middle-European time zone. The early experimenters used local time exclusively: signals were seldom strong enough to be sent into a different time zone!!! Even when DXing started to become popular from about 1924. local times continued to be used. Many operators soon realised the importance of using a generally accepted time standard. From 1934. GCT (Greenwich Civil Time) appeared, but many experimenters used both times on their OSL cards. From 1936. GMT was commonly used by all countries, although Greenwich Mean Time itself had been the standard time (for England) from 1880, being internationally adopted four years later. Nowadays we use UTC (Co-ordinated Universal Time), but this is only because from 1 January 1972 the earth ceased to be regarded as the standard timer. since with the remarkable accuracy of today's chronometers, the extremely small variations in the movement of the earth's axis demanded that the atomic clock set the standard of time.

Her Busiler's transmitter was not Ultrusido.

Observation of Villumary' of 50 water. This
transmitter belongs to the Colpats family of
occilitator. Like the Colpats, the filamity of
othe occilitators was collected to the colpats,
the filamity and the colpats, the filamity of
the occilitators was been compared to the inputtion of two-oppacious to gird sandoc compared
to a compared to the collected to the collected
only one of the capacions is across the tuning
coal, the other being across the earth end of
the coil and the filament. It, like the Collected
was was as favoured by some operation overthe
Hartler for higher fand for requencies.

The antenna was the very popular "Zepp" in which one end of the feeder is attached to the end of a single wire. This voltage-fed antenna has seen many variations over the years such as the "two half waves in phase" antenna it gets its name from the fact that, being an end-fed antenna it could be easily trailed outside the gondola of azeppelin (The

WIA QSL Collection contains the QSL, D4BEC sent from the Graf Zeppelin LZ127 in November 1925 using such an antenna)

ber 1935 using such an antenna) The receiver was a Schnell O-V-2. The name Schnell will ring a bell with those interested in the story of DXing. It was the American Fred H Schnell who, together with another radio pioneer. John L Reinartz, made the first two-way radio contact between USA and France on the night of 27 November 1923. Schnell had received special permission from the Supervisor of Radio at Boston to use a wavelength of 100 metres. Schnell was at that ume, ARRL Traffic Manager and later a Captain in the HS Naval Reserve (In addition to running the Chicago police station!). Schnell used his call of 1MO, later WO7Z. The Schnell receiver was an early regenerative set. In the early days of radio feeding back into the tuning coil (by means of a "reaction coil") some of the anode output was a simple way of obtaining gain and selectivity. The big problem was, of course, the all-too-frequent excessive feedback which caused self-oscillation. This led to serious interference problems; so much so that, according to some licensing regulations, the operator stood a good chance of losing his experimental licence were his receiver to behave as an oscillator. The code O.V.2 stood for the numbers of stages in the receiver. O-V-2 was a popular choice. The first letter O tells us that there was no RF amplification stage (although at the date of this OSO one stage was common). The V signalled a valve detector stage (in this case the regenerative detector, usually a triode) and the 2 Indicated two stages of audio amplification. Readers might be surprised at the attention given by early experimenters to audio rather than radio frequency amplification. It should be remembered that in the early days of radio, from the 1920s to the mid-1930s, the triode valves used gave considerable problems owing to the large capacitance between their single grid and the plate. When tetrodes and pentodes became freely available in the 1930s, and if stages were introduced, radio amplification became an accepted principle. The coupling device of early O-V-2 receivers was just an audio transformer. The HT supply was fed via an RP choke to the triode plate through its primary coil, whilst the grid bias to the AF triode was fed through the secondary winding of the iron cored transformer. Having said this, more fortunate experimenters did use one or more stages of TRF (Tuned Radio Frequency) in front of the detector, stability problems having been reduced by the introduction of the screen grid valve in 1928. Such improved signal level arriving at the detector often allowed an AF stage to be deleted altogether We have to remember too, that sensitivity would have greater priority than audio output to early DXers. After all, the possession of a quality speaker was often out of the money range of the average operator. When pentodes became available commercially in TO VICTE DANZIG G. BUSSLER

TO ST. ST. WIRE T DANZIG G. BUSSLER

DANZIG BRIDGESTI. TO

TO ST. ST. WIRE T DANZIG G. BUSSLER

DANZIG BRIDGESTI. TO

TO ST. ST. WIRE T DANZIG G. BUSSLER

D

the early 1930s, there was really no need for regenerative detection and, in fact, radio regulations were drafted to outlaw this method of reception altogether.

On the OSL card of YM4ZO we can see a list of the DX countries worked by Herr Bussler. although the prefixes of the countries have changed somewhat. The letter I is now IA. Netherland East Indies PK is now YB (Indonesia) and ZE (Southern Rhodesia) is now Zimbabwe 22. In those days Mexico was X, ZD = Nigeria, K4 = Puerto Rico, K5 = Panama Canal. Zone and V0 was Newfoundland (at that time a senarate DXCC country). The DB0676 printed on the bottom of the card indicated (as it still does today) a German Short Wave Listener. In the early days when OSOs with far-away places were a real challenge, many licensed amateurs took "an each-way bet" by becoming instant SWLs when they were unable to make a QSO. Unlike today, the majority of foreign operators in the early days of radio really appreciated SWL reports from DX stations,

there being a considerable exchange of QSL cards between the two. The WIA Collection is preserving several hundred such pre-war reports. (To be continued).

### Thanks

The WIA (Vic Div) would like to express its thanks to the following who have kindly donated OSIs to the Collection.

Percy VK4CPA Bill ex VK6WY Ron VK3OP

Mike VK6HD Stan VK3BSR (ex VK3ASB)

Frank VK2QL Owen VK1CC

Reg ex VK1RP.
Also to the family and friends of the follow-

ing "Silent Keys"
Russell Edwards VK3CZ
Fenton Sanderson VK6TS

### **Divisional Notes**

### VK2 Hotes

### Annual General Meeting Deferred

The 1991/92 NSW Division AGM failed to reach the required quorum on 2 May by a halfhour alter the scheduled time. The "articles" of the Division were not clear on the procedure, leaving the Council with the only option to clefer the meeting date until a date to be advised after seeking legal advice. The advice was to set a new date and advise. members in writing. The new notice is later in these notes. The date has been chosen to take into account the required 21 days notice. It was also pointed out that the "articles" (consultion) of the Division do not address the procedure to be adopted should a duly convened meeting, or an AGM, not attain a quorum. Action is being undertaken to correct this condition.

The new meeting date will also afford mem-

bers an opportunity to participate in a forum discussion on the proposed draft of the next generation "Regulations" for the Amateur Radio Service which you have found in this issue of Amateur Radio

Our thanks to those members who took the effort to either attend - many from country regions - or who submitted proxies for the 2 May meeting. Please note that the agenda for the deferred meeting has changed and that new proxies will be required.

Until the new meeting is conducted and concluded the 1991/92 Council remains in office.

### Wireless trailints of Australia - New **Booth-Wales Blythlon Notice of Meeting**

The deferred Annual General Meeting of the Wireless Institute of Australia, New South Wales Division, will be held at 2pm on Sunday 28 June 1992, at Amateur Radio House, 109 Wigram Street, Parramatta,

Opening of meeting by Chairman Apologies

Confirmation of Minutes of the 1991

4. President's report Presentation of awards

6 Presentation of annual accounts for the year ended 31 December 1991

Declaration of the 1992/93 council 8 (a) Appointment of Returning Officer for 1992/93

(b)Appointment of an Auditor for 1992 Notice of Motion to change the Articles of Association of the NSW Division in respect to General Meetings

10. Discussion period (no motions may be moved)

(a) Members' forum re proposed regulation changes

(b)Other matters that may be raised 11. Close of meeting Note: new proxy votes are required to be submitted for this meeting. Robert Lloyd-Jones, Company Secretary

Day Hamber

Our usual warn			
following who	joined the	NSW Division	rė
cently			

ΚJ	Apps	Assoc	Wyoming
WF	Brown	Assoc	North Bondi
JK	Daniel	Assoc	Port Macquarie
В	Duffy	Assoc	Narromine
JP	Emanuel	VK2XZG	North Rocks
DR	Godden	VK2JDG	Toongabbie
D-W	Hall	Assoc	Inverelt
PJ	Hennessy	VK2KPH	Yagoona
JM	Holland	VK2XZB	Bungendore
LF	Kentish	VK2CFK	East Maitland
JΤ	Jordon	Assoc	Green Point
GC	Paterson	VK2AHJ	North Ryde
WL	Swinnerton	Assoc	Toongabbie
C C	Wahh	WAGO	Unandarra

### Mapponings

It would seem little - based on the attendance for the AGM - maybe there were too many distractions. However, don't miss the Oxley Region Field Day this coming June long weekend at Lighthouse Beach, Port Macquarie; Oxley Region ARC, PO Box 712, Port Macquarie 2444. Phone (065) 83 1311. The next Parramatta located Trash and Treasure will be on Sunday afternoon 26 July. Listen to VK2WI that morning for the weather forecast. The next VK2 Division exam will be held at Parramatta late August. Contact the office for details of this or other exams. Also see list of

exam sources/locations in recent ARs Recent work at VK2WI has restored most transmitters to the broadcast format. There are no 20 or 15 relays at the moment. Seven metres is relayed on 18.120, and 12 metres is broadcast from Dural on 24.910. The 6m beacon has been overhauled and is back on line. Tree growth is starting to shield beacon antennas; relocation is being considered. VK2WI seeks a recent 50 watt solid state low/mid band base suitable to replace a very aged BS50 for 52.525MHz. VK2RWI is upgrading packet UHF linking to the various networks. Ch 4850 antenna recently improved. Richard VK2SKY will start to take over some of the broadcast preparation from Dave VK2KFU.

### 5/0 Wave

1992/3 Council At the AGM of the VK5 Division, held on Tuesday 28 April, the following members were elected to Council, and as usual to provide continuity, the President Secretary and Treasurer were elected at a brief council meeting

afterwards.		
President	Bob Allan	VK5BJA
Secretary	John Highman	VK5PJH
Treasurer	Bill Wardrop	VKSAWM
Past President	Rowland Bruce	VK50U
WICEN Director	lan Watson	VK5KIA
	Peter Maddem	VK5PRM
	Rob Gunnourie	VKSFI
	Mark Spooner	VICSAVO
	Alan Roocroft	VKSZN
	Chuck Waite	VK5CO

Other positions will be allocated at the next

council meeting. We welcome to Council two new members. Chuck VK5CO and John VK5PIH, and wish them a long and happy time on Council. Unfortunately, we also farewell two hardworking members, Don McDonald VK5ADD and John McKellar VKSBIM, Amongst other positions he held, Don was Secretary when I was President, and President after me. He has also been Minutes Secretary and Examination Officer over the past two years. I enjoyed working with him and found he was someone you could always rely on. After seven years on Council he will certainly be missed. I'm not sure how long John has been on Council, three or four years possibly, but during that time he too has been a warmly accepted and valuable member of Council. We wish both of you a healthy and happy retirement.

### Diary Dates

6-8 June South East Radio Group Convention. Mt Gambier General Meeting, Burley Griffin

23 June Building Buy and Sell Night 30 June

Exemination Dates and Information I am very grateful to Christine Taylor VK5CTY,

who provided me with the dates of all forthcoming examinations in the Adelaide metropolitan area for the rest of this year. She also sent me the information sheets she sends out to would-be candidates. This month we have published the sheets for "General" and "Morse Code Only" exams. Next month we will bring you the "Remote Areas" and "Special Conditions" papers.

### **Examination Program for 1992**

Date	Vanue	
4 July	Burley Griffin Building	WIA (SA DIV)
B Aug		AHARS
5 Sept	Burley Grittin Bullding	WIA (SA DIV)
31 Oct	Burley Griffin Building	WIA (SA DIV)
14 Nov	Black Forest Primary School	Christina Taylor
5 Dec	Blackwood High School	AHARS

Gentari Phone Mumbers

WIA (SA Div), Don Macdonald 276 1251 AHARS, Alan Haines 276 7091 Christine Taylor 293 5615 Contact must be made at least two weeks

before the date of the examinations Information for Applicants for

### American Examp

From January 1992 the amateur examinations will be conducted under the authority of the WIA Exam Service.

In each state there will be a list of official examiners which will be available from DoTC These examiners will conduct exams at scheduled times and places (available from the examiner or the local Division of the WIA). All examinations must have two official examiners present at all times.

Candidates unable to attend scheduled examinations should read the information sheet for remote areas or special condition

immiretime. Candidates wishing to sit for any of the amateur exams should apply to the appropriate

examiner at least three weeks before the date of the examination. Payment for the examination(s) will be at the

time of application. On the day of the examination the candidate

will be able to obtain a provisional mark at the conclusion of the examination, The official mark and any appropriate forms will be forwarded to the candidate from the WIA Exam

Service These results, along with any previously obtained qualifications, must be presented to the Department of Transport and Communication when applying for certificates or station licences

Good luck! Prepared by Christine Taylor VK5CTY

### VK6 Notes

The AGM came and went, and the composition of the Divisional Council remains much to same. VK6WZ's withdrawn nomination for VP and VK6APA's ditto for councillor made an election unnecessary. Glen VK6ZGT was the only other nomination for VP, and was declared elected.

The bookshop is again up and running. Brace Robson VK6ABR is the new man, and is doing a fine job; the same can be said of Nick VK6ND, our new broadcast officer.

Last month trial relays of the Sunday morning bulletins on the top band were unitiated by john VK6iM. His first morning (26 April) yielded so many sations on the callback, John was somewhere between shock and delight! He handled it well, however, and 160 metres might become a permanent relay frequency. His best DX was John VK6JX at Thompson's Brook in the youthwest.

Judging by comments on air, interest in ATV is on the increase in WA, and the same can be sald for UHF and SHF. The VHF group is promoting 10 gigs and there are whispers about a special project for UHF taking shape at Northern Corridor.

Membership of the division continues to grow and although fire from ideal, is still a couple of percent above the national average. Keep percent above the national average. Keep possitive, don't put them down because they've not members, lead them your AR Occasion-to not members, lead them your AR Occasion-to not members, lead them your AR Occasion-between commercial uses of the spectrum and amateur radio we must have more handle on on our end of the open. affective room our end of the open. affective room lookerst

### QRM from VK7

Frank Moore VK7Z	MF	
President	Tom Allen	VK7AL
Secretary	Ted Beard	VK7EB
Treasurer	Peter King	VK7ZPK
Intruder Watch	Robin Harwood	VK7RH
QSt Manager	Charles Harrison	VK7CH
QRM Editor	Frank Moore	VK7ZMF
Repeater Co-ord	Anthony Tunks	VK7ZTA
Patron	Col Wright	VK7LZ
Federal Council	Jim Forsythe	VK7FJ
Broadcast Officer	John Rogers	VK7JK
Awards Manager	Bob Jackson	VK7NBF


VK7 Drysional Council is now.

VK7BE Barry Hill, Northern Branch VK7PU Phil Harbeck, North West Branch VK7ZPK Peter King, Southern Branch

VK7AL Tom Allen, Southern Branch VK7EB Ted Beard, Southern Branch VK7ZMF Frank Moore, Southern Branch VK7JK John Rogers, Southern Branch VK7GL A Dickson, Southern Branch

Retiring members of Council are: VK7JG, VK7IH.

Newmembers of Council are: VK7GL, VK7BE, years, Southern Branch VK7PU Bob Jackson is retiring as Awards on, Southern Branch Manager after this year and is looking for a replacement. Any offers?



Help stamp out stolen equipment -

keep a record of all your equipment serial numbers in a safe place.

### Silent Keys

Due to increasing space demands obituaries must be no longer than 200 words.

The WiA regrets to announce the recent passing of:

A Cutting VE2AAC

A Cutting VE2AAC
W T (Bill) Wilson VK3DXE
M (Merv) Busch VK3LL
G (Graham) Phillis VK5AGP

### Graham Phillis VKSAGP Belatedly I wish to advise on the passing of my next-door neighbour and friend Mr Graham

Phillis VK5AGP.
On Tuesday afternoon, 30 July 1991, while riding his motor cycle to work for the afternoon shift at the Pasminco BHAS Smelting

noon shift at the Pasminco BHAS Smelting Works, he was struck by a car entering the main road from a side street, and died shortly after This was more than tragic, as Graham was only 52 years of age. Graham was quietachiever, and followed

his hobby for a number of years. He did spend some time with his own radio and TV business, which he finally quit to go into the smelting works. He was keen on building his own equipment and always had some radio project or other under way. Amateur TV was one of his interests and he was more interested in getting something going than operative.

He was a member of the Port Pirle Amateur

Radio Club for some years, and he was also a very keen breeder of birds.

He is survived by his wife Raylene, a son 24 wears, and twin daughters 21 years.

eans, and twin daughters 21 years.

Brian Condon VK5CO

### Bill Wilson VK30XE

It is with deep regret I advise the passing of a good friend, Bill Wilson VK3DXE.

Bill gave great service as a Victorian Division Councillor in years gone by, and I will always remember him as the very first 'full call' I had a contact with after I gained my call vicayor

Bill was a man's man - a true "rough diamond" with a heart of gold, and always ready to help a fellow amateur

Bill became ill a relatively short time ago whilst at his favourite place - his fishing shack on Big River up in the mountains around

After surviving major surgery for a short time, Bill lost the battle with cancer and passed away at his home on Tuesday moming 5 April.

away at his nome on I uescay morning > April.

VK3DXE will be well remembered by his
many friends, and to his wife Margaret and the
family, the Victorian Division Council offers

sincere condolences.

Berry Wilton VK3XV

Adam Maurer's letter in May AR is quite right, we should highlight WIA members in the Calibook After all, we're proud to be members and

A bold suggestion

we pay WIA management to ensure we're provided with services above those available to non-members. Rather than put a "t" mark against member

callsigns, why not do what the phone books do and have them in **bold print?** 

And if the non-members scream? Good Send them a membership application form. A bold printed callsign may cost them less than bold print in the phone book

Gareth Davey VK2ANF PO Box 1367 DEE WHY 2099

### WICEN again

The Newcastle earthquake brought about major upheavals in the thinking of emergency service providers in New South Wales and beyond. For them, "amateur" communicators (in the sense of "lacking professional skill") are no longer good enough

In a disaster of Newcastle's proportions, to whom will an emergency management office entrust. his message: the WICEN operator, trained in emergency traffic handling procedures and wearing the recognised uniform of an accredited emergency services support group, or the guty who slouches up in thongs and stubbles with an HT, saying "I have a radio; I want to Jelo."?

If Mr Ellis questions the relevance of WICEN, perhaps he should ask why WICEN is being written into every Disaster Management Plan in the state of New South Wales

As for membership fees, is \$10 a year more than his community spirit is worth?

Procedures: they're the same ones used by the other emergency services. Exercises: doesn't Mr Ellis recognise the

value of training?

If Mr Ellis is left at home when disaster

strikes, it will be because he is not a member of an accredited emergency service or support group If he tries to interfere, or "help out", he will be committing an offence under NSW law

The thousands of dollars worth of time, service and equipment provided by dedicated WICEN members goes a long way towards justifying usage of radio spectrum worth \$1 million/megaHertz. By comparison, keeping one's local repeater warm all day with idle chat about the weather contributes even less than the oitance we nav in licence fees.

When I put on my WICEN uniform, I stop being an "smateur" and become a "volunteer professional communicator" When lives and property are at stake, we must settle for noth-

ing less

Richard P Murnane VK2SKY 7/15 Grafton Cres

DEE WHY 2099

### Over To You

All letters from members will be considered for publication but must be less than 300 words. The WIA accepts no responsibility for opinions expressed by correspondents.

### Technical plagiarism? The article on Loop Yagis, in AR for April.

is grossly unfair to me.

The author attributed the design of the

Loop Yagi to RSGB.

In fact, the long quad (loop yagi) was designed by me (VK3ALZ)

In AR for June 1967 is an article by me entitled "Long Quads for 144, 432, 1296 MC" The article details the advantages of the long quad over the long yagi, and shows both

square and circular element designs.

Some years later (1970 on) articles began appearing in overseas magazines with copies

or near copies of these designs - without acknowledgement, I might add. However, VHF Communications did have the courtesy to acknowledge my prior work. What particularly annoys me in respect to the April article is that I have verbally supplied long quad design information for previous Mr Skene expeditions - but no mention of this was made.

Of course, Loop yagis are being sold commercially by the thousand now for 400MHz and above, for which neither I nor Amateur Radto will ever see a cent.

I wish to thank Bill Roper VK3AR2, general manager, for a photocopy of the June 1967 article.

#### Ian Berwick VK3ALZ 107 Loongana Ave GLENROY 3046

(Bill Magnusson is most apologetic, lan, at not being aware of your prior contribution. He based bis design on the RSGB information which, as you say, also failed to acknowledge your work. Ed).

### **WICEN** replies

In the April edition, S V Ellis VK2DDL questions the value of WICEN. I know its

That's why I joined it years ago, and why I've served the past few of them as president

in NSW He does not seem to understand that times have changed, and WICEN has changed with

When the NSW Rescue & Emergency Management Act of 1989 was proclaimed, all existing rescue and emergency service organisations were given primary and secondary responsibilities

The NSW Volunteer Rescue Association was included in this review, with two of its specialist squads, WICEN and CREST, accredited by the State Rescue & Emergency Services

Board for communication support roles. The combat agencies have their own dedicated communications systems and WICEN. as a specialist technical support group, rein-

forces them. The Act is firm about legal accreditation and responsibility for disaster management, making it a punishable offence for unaccredited organisations to attempt to par-

ticipate in emergency operations. WICEN integrates casual volunteer amateurs offering specialist aid, and disaster com-

bat agencies which, in NSW, are co-ordinated by the police. As VK2DDL correctly points out, DoTC regulations cover emergency operation and,

subject to the control of relevant authorities. an amateur is entitled to engage in emergency communications. In NSW, authorities recogpise only accredited organisations, one of which is WICEN WICEN believes that amateurs are not only

entitled, but also morally obliged, to help the community in time of crisis, and is the structure through which those with commitment can best function

VK2DDL said our reception had been cool

it's a pity he didn't look further affeld and talk to the commanders in NSW's disaster combat agencies or the people they help.

They're very warm to WICEN Ian Nance VK2BIN

22 Truscott St NORTH RYDE 2113

### **Metrics please**

I have read with interest the article on \*Multiband Inverted V for the Z Match Antenna" by Adrian Fell VK2DZF in April AR 1 do not wish to seem to be "nit oicking" but I wish ali amateur radio operators would convert themselves to the metric system and not give measurements in the archaic feet and inches. I am the instructor for the novice course run by our local amateur radio club, and teach all newcomers in the metric system. We also refer to the wavelength in metres; we use the formula for converting frequency to wavelength in metres. To make a half-wave dipole, the formula gives us the answer in metres, so why give dimensions for antennas etc in feet and inches. Things get complicated enough without mixing "... spacing about 0.72 inch. spreaders every eight inches, and wire size Imm thick

Although I was brought up on feet and inches (nearly 60 now). I have tried to convert to metric. The vounger ones do not learn about feet and inches now so, please, can other writers convert to metric so these youngsters can easily understand. (I haven't even got a measuring stick in feet and inches any more).

### Reg Wheller VK4ARW 20 Watson St HERVEY BAY 4655

(You will have read the letter from 3ZTN last month. Reg. expressing much the same thoughts as yours. As you say, it should be authors who use metric dimensions to begin with. That would make life much easier for us noor aditors!)

### Zero callsions

VK0ZCM

The list below indicates the present operators with VKO callsigns down "south".

VKOAW DU Mantal VKICE C Hobbs P Smyth VKOCN VKODI D Mehonoshen A Cramond VENEZA G McDiamid VKONE C Mohring

J Hunt VK0Z#H The next crop of callsigns to be issued for operation in the Antarctic and Macquarie Island should appear around next Oct/Nov '92. This will be when the bases are re-supplied during the '92/'93 summer season.

Nell Penfold VK6NE VK0 OSL manager

### Ho Code Novice

I wish to voice my opposition to the current proposal of no-code povice. The idea is good. but I don't believe that two metres is the answer because 146-148MHz is full enough. Why not give them a portion of six metres, as there are far less operators on this band?

In reply to Les VK4ZLP (ARMay 1992) how can you say a novice has most full-call privileges and there is no incentive? I think there is a big difference between 30 watts and 400 watts etc (read the regs).

I started studying August 1990 and had my novice by March 1991, I had my full call by November 1991 It was hard work. Novice gave me a taste, which was enough incentive to continue.

Finally, how is it becoming like CB? There are still CW, theory and regulation examinations, and I believe CW is a necessary part of amateur licence examinations

### Rob Owen VK3ICG PO Box 713 DETERM 5005

(Originally it was WIA bolicy to advocate six metres rather than two for the VHF band common to all licensees. This was changed due to several significant factors, one being the ready availability of 2m equipment - Ed)

### Help protect our frequencies -

become an intruder watcher today.

EAST - AFRICA VK STH - AFRICA VK WEST - AFRICA  K FAST - ASIA  VK STH - ASIA  VK WEST - ASIA  VK WEST - ASIA  VK WEST - ASIA  VK WEST - ASIA	V/K	UTC MLP 1 25 4 4 2 24 4 4 5 21 5 4 5 21 5 9 1 5 2 1 9 1 5 6 1 9 1 5 6 1 9 1 5 6 1 9 1 5 6 1 9 1 5 6 1 9 1 5 6 1 9 1 5 6 1 9 1 9 1 5 6 1 9 1 9 1 9 1 9 1 9 1 9 1 9 1 9 1 9 1	UTC MUFF 129.6 2 20.1 29.6 24.20 2.1 29.6 26.2 29.6 26.2 29.6 26.2 29.6 29.6	UTC MUS 1 27.1 2 26.1 2 26.1 1 26.6 4 36.7 5 26.7 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	UTC   HUR   1 9 4 4 2 1 8 4 4 7 5 1 1 2 2 8 6 4 7 5 2 8 4 7 5 2 8 6 4 7 2 2 8 6 8 7 2 2 8 8 8 1 2 4 7 5 2 8 6 4 7 5 2 8 6 8 7 8 2 8 6 8 8 7 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8
AST - AFRICA VK STH - AFRICA VK WEST - AFRICA  EAST - ASIA VK STH - ASIA VK WEST - ASIA  EAST - ASIA VK STH - ASIA VK WEST - STH PACIFIC  VK STH - STH PACIFIC VK WEST - STH PACIFIC	CACT	d8U 10 10 18 22 21 22 27 28 28 21 25 26 21 26 27 28 24 21 25 26 26 27 28 28 28 28 28 28 28 28 28 28 28 28 28	26 29 52 34 37 35 41 41 41 41 42 44 44 44 44 42 24 25	dbL 11 11 11 11 11 11 12 12 12 13 14 15 15 16 17 18 18 18 18 18 18 18 18 18 18 18 18 18	9 0 - 6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
- AFRICA VK STH - AFRICA VK WEST - AFRICA  THE PROPERTY OF THE		POT 19.8 19.8 17.9 17.9 16.9 11.8 10.5 9 12.8 6 0 0 6 0 0 7 12.8 10 5 9 12.8 10 5 9 12.8 10 6 0 0 11.9 12.9 12.9 13.9 14.9 15.9 16.9 17.9 17.9 17.9 17.9 17.9 17.9 17.9 17	POT 12:19 12:19 11:4 10:2 11:6 11:6 11:6 11:6 11:6 11:6 11:6 11	FOT 21.01 21.01 21.01 19.0 20.6 20.2 10.9 10.9 10.9 10.9 10.9 10.9 10.9 10.9	7 4 6.7 9 2 14.1 18 1 14.5 12.0 9.9 8.1 7.1 6.4 6.5 6.5
AFRICA  VK STH - AFRICA  VK WEST - AFRICA  ASIA  VK STH - ASIA  VK WEST - ASIA  VK WEST - ASIA  VK WEST - ASIA  VK WEST - ASIA	ICA /	14 2: -14 -4 -8 -9 -9 -9 -9 -9 -9 -9 -9 -9 -9 -9 -9 -9	244 444 444 444 444 444 444 444 444 444	14 2 8 6 6 7 7 6 11 12 12 12 12 12 12 12 12 12 12 12 12	*****************
RICA VK STH - AFRICA VK WEST - AFRICA  SIA VK STH - ASIA VK WIST - ASIA  VK STH - ASIA VK WIST - ASIA  VK STH - ASIA VK WIST - STH PACIFIC  ACIFIC VK STH - STH PACIFIC VK WEST - STH PACIFIC	CAL	18 1 : 2 : 2 : 2 : 2 : 2 : 2 : 2 : 2 : 2 :	10 10 20 20 20 20 20 20 20 20 20 20 20 20 20	18.1 16.1 19.1 16.1 15.1 10.2 20.2 20.2 20.2 20.2 10.2 10.2 10	-36 -15 -2 -2 -5 -6 -11 -15 -21 -21 -21 -21 -21 -21 -21 -21 -21 -21
CA VK STH - AFRICA VK WEST - AFRICA  A VK STH - ASIA VK WEST - ASIA  VK STH - STH PACIFIC VK WEST - STH PACIFIC	HDI	11 2: 7 11 15 20 24 24 39 39 32 -12 -21 -21 -21 -21 -21 -22 -27 -23 -10 0 2 1 3 4	21.2 34 34 34 35 35 35 31 25 31 25 7 7 13 -6 -7 -12 -2 2 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	21 2 17 16 15 16 17 18 18 19 19 19 19 19 19 19 19 19 19 19 19 19	-35 -32 -32 -31 3 8 7 -8 -48 -30 -30
VK STH - AFRICA  VK WEST - AFRICA  VK WEST - ASIA  VK WEST - ASIA  VK WEST - ASIA	ICA.	24.9 3 30 33 14 16 16 16 16 16 16 16 16 16 16 16 16 16	26.9 30 30 30 30 30 29 27 28 11 -19 -29 -29 -29 -29 -29 -29 -29 -29 -29 -2	14.9 14 15 15 16 16 16 17 18 18 19 10 10 10 10 10 10 10 10 10 10 10 10 10	-27 -27 -3 4 2 -29 -109 -239 -39 
VK STH - AFRICA  VK WEST - AFRICA  VK STH - ASIA  VK WEST - ASIA  VK WEST - ASIA  VK WEST - ASIA	1	9 5 7 8 8 9 5 -4 -37 -34	24 24 22 18 9 -3 -17 -30 -37 -30 15 22 24 24	28 5 6 6 7 2 -23 -23 -25 -25	701
STH - AFRICA VK WEST - AFRICA  K STH - ASIA VK WEST - ASIA  VK WEST - ASIA  VK WEST - ASIA	VIV 6	#27 MDF   1 27 4 2 26 4 4 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2	### C AMP 1 22-2 22-9 2 22-9 4 21-6 5 19-8 6 12-3 7 18-9 9 18-9 18-9 18-9 18-9 19-9 19-9 19	UTC MIP 1 23.6 2 23.1 3 23.6 6 23.9 5 24.6 6 23.6 7 21.7 8 19.2 9 16.2 10 13.5 13 11.2 12 9 8 13 13.2 14 8.6 15 7.6 17 7.2 18 9.8 19 9.8 19 9.8 19 9.8 19 9.8 10 13.5 10 13.5 11 12.2 12 9 8 13 9.0 14 8.6 15 7.6 17 7.2 18 9.8 19 7.8 10 13.7 10 12.8 10 13.5 11 12.2 12 9 8 13 12.2 14 8.6 15 7.8 15 7.8 16 7.8 17 21.7 18 9.8 19 7.8 10 12.2 10 12.2	1 9.2 2 8.9 3 12.3 6 18.7 5 23.1 6 26.7 7 23.5 8 21.4 9 18.6 10 15.6 11 13.6 11 13.6 11 13.6 11 13.6 11 13.6 11 13.6 11 15.6 11 15.6 1
TH - AFRICA  VK WEST - AFRICA  STH - ASIA  VR WEST - ASIA  VR WEST - ASIA  VR WEST - ASIA	TIL	db0 9 12 26 16 20 20 20 21 26 20 20 20 20 20 20 20 20 20 20 20 20 20	4800 133 134 135 137 222 235 243 233 234 235 236 236 237 237 238 237 238 238 239 239 239 239 239 239 239 239 239 239	9 10 10 10 10 10 10 10 10 10 10 10 10 10	13 14 13 9 8 8 9 9 10 12 23 28 28 30 31 31 31
- AFRICA  VK WEST - AFRICA  H - ASIA  VK WEST - ASIA  STH PACIFIC  VK WEST - STH PACIFIC		22 5 21.5 20.0 18.9 18.3 16.3 11.0 9.0 7.0 7.1 6.9 7.1 7.5 6.8 6.8 6.8 11.9	FOT 16.7 17.1 17.1 15.5 15.0 11.0 11.0 11.0 9.1 9.1 9.1 9.5 9.9 5.7 5.6 5.6 5.6 5.6 9.9 9.1	FOR 18.6 18.6 17.0 18.6 17.0 18.6 17.8 16.2 16.2 6.4 7.6 6.5 6.5 6.7 7.0 6.1 7.0 11.0 11.0 11.0 11.0	7.6 6.9 9.1 16.4 18.7 20.1 17.6 14.7 12.2 20.1 8.4 7.0 7.1 7.0 7.1 7.0 7.1 7.0 7.1 7.0 7.1 7.0 7.1 7.0 7.1
AFRICA VK WEST - AFRICA  ASIA VK WEST - ASIA  PACIFIC VK WEST - SIH PACIFIC		11 83 25 14 25 25 20 20 13 7 7 7 6 6 7 7 7 1 1 1 1 1 1 1 1 1 1 1 1	22 24 27 29 22 21 12 -4 -16 -17 -19 -20 -21 -22 -23 -21 -21 -21 -22 -23 -23 -23 -23 -23 -23 -23 -23 -23	14.2 5 3 5 8 135 227 27 27 27 27 27 27 27 27 27 27 27 27	211111111111111111111111111111111111111
RICA VK WEST - AFRICA  SIA VK WEST - ASIA  ACIFIC VK WEST - SIH PACIFIC		10-1: 4 13-15-26 20-23-1 -10-27-27-27-29-16-10-10-10-10-10-10-10-10-10-10-10-10-10-	18.1 21 21 22 22 22 22 24 10 -10 -21 -21 -21 -21 -21 -21 -21 -21 -21 -21	10.1 12 13 13 14 14 14 15 10 -22 -22 	-18 9 12 11 11 11 9 9 -17 -24 -21 -21 -21 -27 -34 -35 -29
CA VK WEST - AFRICA  VK WEST - AFRICA  VK WEST - STH PACIFIC	-	212 : 9 : 34 : 19 : 25 : 25 : 27 : 27 : 27 : 27 : 27 : 27	211.3 15 16 17 16 18 19 40 40 40 40 40 40 40 40 40 40 40 40 40	221 2 2 32 32 32 32 32 32 32 32 32 32 32 32	39 -39 -39 -32 -3 -32 -32 -32 -32 -32 -33 -33 -33
VK WEST - ASIA  VK WEST - ASIA  VK WEST - STH PACIFIC		24 9 2 10 10 11 11 11 12 12 13 14 11 12 13 14 14 15 16 17 17 18 18 18 18 18 18 18 18 18 18 18 18 18	24 9 2	24.9	-31 6 8 6 2 -4 -14 -29
VK WEST - AFRICA  VK WEST - ASIA  VK WEST - SIH PACIFIC	_	24 5 8 10 12 11 9 0 -16 -39	-3 -2 -3 -3 -3 -3 -3 -3 -3 -3 -3 -3 -3 -3 -3	9 -16	-12 -12 -1 -1 -15 -15 -30
WEST - AFRICA  WEST - ASIA  WEST - STH PACIFIC	1417 3	UTC MUP 1 24.2 2 21 6 7 2 2 7 4 21.9 4 21.9 4 21.9 4 21.9 5 6 8 18.9 9 20 15.9 11 10.2 12 11 10.2 14 10.3 15 10.2 16 10.4 10.3 15 10.2 20 8.8 2 2 11.6 2 2 11.5 2 2 2 11.6 2 2 2 11.6 2 2 2 11.6 2 2 2 11.6 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	VTC MUP 1 28.0 228	PTC MOT 1 24.0 2 24.2 3 25.4 4 25.3 5 25.5 6 25 7 7 25.6 6 24.9 9 22.1 10 26.7 11 10 26.7 11 10.2 11 10.1 10.1 10.1 10.1 10.1 10.	5 25.1 6 25.9 7 26.9 9 32.8 10 20.0 11 16.6 13 11.6 13 11.6 13 11.6 14 9.8 15 9.8 16 6.7 17 6.0 18 9.8 20 9.2 21 8.5 22 8 4
VEST - AFRICA  WEST - ASIA  ST - STH PACIFIC	March 1	08U 6 8 30 11 12 12 12 12 12 12 12 12 12 12 12 12	080 10 10 10 10 10 11 11 12 12 13 14 15 12 12 13 14 15 15 15 15 15 15 15 15 15 15 15 15 15	490 12 12 12 13 13 13 13 13 13 13 20 21 22 23 24 24 24 25 26 26 26 26 26 26 26 26 26 26 26 26 26	15 12 12 12 15 15 16 17 17 24 28 31 23 33 33 34 36 36
T - ASIA  ST - ASIA		FOT 19-0 19-0 18-4 27 0 16 4 21-0 10-0 8-1 7-7 8-9 6-9 6-9 6-9 12-9 24-9 24-9 24-9 24-9 24-9 24-9 24-9 2	POT 20.2 21.5 21.5 21.5 21.5 21.5 21.5 21.5 21	POT 20.01 29.00 29	6.9 6 / 2 14 8 10 3 26.0 19.7 18.8 17.1 15.0 22.5 6.7 6.5 6.9 7.0 7.0 6.9 7.1 7.0 6.9 7.1 7.0 6.9 7.0 6.9 7.0 6.9 7.0 6.9 7.0 6.9 7.0 6.9 7.0 7.0 7.0 7.0 7.0 7.0 7.0 7.0 7.0 7.0
AFRICA  ASIA  H PACIFIC	10 4 4	16 2 -24 -24 -24 -24 -24 -24 -24 -24 -24 -24	14.2 12.14 14.16 18.2 20.2 20.2 20.2 20.2 20.2 20.2 20.2 2	24 31 8 9 114 125 124 220 121 121 121 121 121 121 121 121 121	5 10 10 5 6 7 11 12 11 8 6 7 7 8
ERICA SIA SIA SIA		18.1: 0 5 117 23 20 26 20 11 26 -6 -6 -7 -7 -14 -1	18 18 29 20 20 20 20 20 20 20 20 20 20 20 20 20	10.1: 10.1: 16.1: 16.1: 17.1: 17.1: 21.2:	-20 -21 13 14 12 11 10 10 11 10 -44 -22 -29 -21 -21 -21
S		12 2 2 5 5 12 14 16 16 17 18 18 18 18 18 18 18 18 18 18 18 18 18	11.2 2 17 18 19 19 19 19 17 12 12 12 12 12 13 14 15 15 15 15 15 15 15 15 15 15 15 15 15	21.20 176566889980-12204-12004-12204-12004	-12 8 14 13 12 11 7 -7 -21 -36
1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		4 2 2 6 8 7 11 13 14 15 13 15 13 -8 -20 -20 -20 -20 -20 -20 -20 -20 -20 -20	4.9 2 13 14 15 15 14 12 16 -15 -23 -23 -23 -23 -23 -23 -23 -24 -23 -24 -24 -25 -25 -25 -25 -25 -25 -25 -25 -25 -25	4 # 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	-11 9 14 9 -9 -24
		:	7 -6 -19 -36		-10

12.1 17.0 16.9 19.6 22.9 24.6 25.3 24.0 21.1 17.3 14.4 11.0 9.5 9.7 20.6 22.6 23.0 24.2 23 1 20 9 18 1 15 5 13 3 11 8 15 2 13 1 11.2 18 0 9.1 2 6 8 5 8 6 5 0 7 0 -53 -22 -32 -15 11. 17 10.4 10 9 8. 9.8 10.1 9.7 8.9 8.8 10.9 10.2 10 2 10 3 9 6 8 6 8 1 10 8 39 29 21 22 23 200 21 26 25 26 29 19 14 6 -12 -17 16 2 15 3 14.6 14 1 14 2 14.8 16.0 13.2 10.9 9.7 9.0 9.7 9.7 11 2 10.7 10.2 9.9 10.1 10 6 11.4 10.3 -20 -25 -21 -16 -13 33 34 45 85 85 -11 -16 -28 -12 -13 -29 -36 -35 -31 16.2 13.4 11.0 9.7 9.8 9.8 9.8 9.8 10 12 11 14 15 16 17 10 L 9.3 9.0 9.2 9.4 9.4 9.6 10.6 10.9 10.9 10.0 10.0 -24 9.0 8.4 8.7 13.2 17.2 17.2 7.4 10.0 17.2 12.8 12.3 -15

# Tapped inductor antenna tuners Full of features yet budget priced!

**=.00** 

Full 1.8-30MHz coverage

- Peak and average reading crossed
- needle SWR/Power meter
- Built in 300W dummy load
- 6 position antenna switch 4:1 balun for balanced lines or
- long wires
- Full 12 month warranty

Why settle for an imitation when for only \$325 you can have a genuine MFJ antenna tuner

With a single high-Q inductor and two high quality capacis the MF1949D offers better matching than tuners using two inductors yet takes up considerably less space in your operating position in fact, it is small enough to use portable or mobile The built-in 300W dummy load makes tuning sooc easy! It

elps to reduce needless QRM, protects your finals and you'll find it invaluable for testing and adjusting transceivers Why not join the many hundreds of satisfied MFJ949D owners

Australian, as well as the tens of thousands around the World!





MFJ948

So you would like all of the features of the MFI949D but don't want a dummy load? Well here is the answer. The MFJ948 is identical to the MFJ949D but has no durning

Stafford Street Huntingdale

# HAMADS

#### THADE ADE

WEATHER FAX programs for IRBAN TATA'S, RADE-NX
A RITTY receiving program hore IRBAN TATA'S, RADE-NX
A RITTY receiving program home CGA, SSSR\* rade
A RITTY receiving program home CGA, SSSR\* rade
A RADEAN Secondary Also REPOSERSE, REPECA and
Home Case, EGA and VIGA costs recoectively. SAFFAX
Home Case, EGA and VIGA costs recoectively. SAFFAX
hade EGA of VIGA costor monitor and cast a
program ser on EGA of SSF or SST\* date (sees which) &
documentation, and SS postage CGAY from the
Contractation, and SSP or SST\* date (sees which) &
SSF 2762.

When the Contract Recoective CGAY is the contract of the Contract Recoective CGAY
SSF 2762.

When the Contract Recoective CGAY
SSF 2762.

When the Contract Recoective CGAY
SSF 2762.

When the CGAY

AMIDON FERROMAGNETIC CORES. For LFAHF/ VH-FAHF applications. Send DL size SASE for damb price to RJ & US Imports, Box 431, Niama NSW 2533 (no enquries at office, please . . . 14 Boarryo Ave, Kama) Apances at Geoff Wood Electronics, Syd-ney, Webb Electronics, Albury, Assoc TV Service, Hobart, Electronic Componenta, ACT, Trasott Elec-

IBM-PC CLONES ANTOR/RTTY/CW/FAY/SSTV Your selection of modes supplied in one comprehensive program, Details from VK4ASB, 23 Denvin St. Asoley Old 4034. Tel AH: (07) 283 8689.

#### FOR SALE ACT

YAESU FT787 70cm 2m 8m & HF TX/RX all band RX plus FL7000 YAESU HF LINEAR 160-10m, both for \$4500 ono. Phil VK1PJ (b6) 292 3250 (H), (b6) 290

### FOR SALE - NSW

● KENWOOD TB400S HF byr EC with voice mic, batt cable, manual \$1850. Max VK2GE QTHR (085) 85 5732.

■ TWO RF CONCEPTS "Fourth Generation" solid state power amps for 2m and 70cm. Both feeture state-oi-the-art GeAs-FET preamos, variable SSB adate-of-the-art GaAs-FET preamps, variable SSB cleay, high SVMP protection, over temperatural protection, sutomatic or remote keying and remote control. All modes of transmission, including FM CW and SSB Input 200mW to SSW output up to 170 wetts. Brand new A steal at SSB sech. API000 acanner, wide range portable monitor moselver, 8-1300MPs. Full features, 3:365. KVEZUC. (02) 388 1091 (14), (02)

 KENWOOD TS 1208 VFO 120 AT 120 MB 100 sensitive manual, all VGC, Yaesu VFO FV107, new, the lot ice menual, ell VGC, Yaesu VFO FV107, no \$700, Robin L20423 OTHR (089) 63 9232.

 SHACK clearance - 10m tower, 2m HF trans, HF Yagt, 2 teleprinters with encod & decod, ATV TX; BWD, CRO: Yassu FT1012D HF trans DS oles 2m trans plus range of other equip. Prices on eng. John VK2CJV AH (02) 809 5024.

@ DECEASED ESTATE Offers in WRITING (letter of lax) are swited for the following equipment: YAESU FT801DM HF xxvr (#9G081234), digital & analogue dispay, 180W, SSB 80W AM, FM & FSK; 240V AC & 13V DC, not YD148 deak mic YAESU FL2100B HF linear amp (97G170092). KENWOOD TR7400A 2m FM xcvr (9650626), PLL 5kHz steps, 5/25W output: incl mobile mounting cradle & mic. CDE HAM III incl mobile mounting cradile & mic. CDE. HAM III (Serfes 2) entenna rotator, control box & electronic directional indicator, 240V; austable for arrays up to 12.5 sq 1 of wind surface area\_LEADER\_ICG-382 PAI. TV pattern generator (#2080008), 240V; B&W & colour dots, cross-hatch & remibow patterns, video & RF (50-80MHz) output. (No handbooks etc.) HEWLETT-PACKARD 410C electronic voltimates #844-01014); 240V; measures AC/DC voltage, RF voltage to 700MHz, DC current & resistance. HEWLEYT-PACKARD HP5024A digital logic tool kit;

NPS46A logic probe (TTL 00882; CBICS 00880). NPS46A logic probe (TTL 00882; CBICS 00880). Carry case & appreciation class PROSAX MCTRS TV and through most (1990; W below post, max called shrough most called shrough most shrough hostification, could departe sit. Scoons-tings, Transmitting pass cold to incread called confusions. Costate Black Called (1994) (1995) 85 1972 or has (1993) 2750 or (1994) (1995) 85

#### EOR SALE - VIC

◆ YAESU FT1012D HF bor with PV101Z and VPO orig boxes \$695 YAESU F5101B HF bor with FV101 and VPO with spare new finals, orig boxes, \$605 YAESU F110B HF TXC/VF with FV-101 ent VPO with spare new finals orig boxes \$465 \$1100 for both rigs. Rey VICXOP 01THR (10) 726 \$222 after \$26

A GELOSO ECHIPMENT GOSTO TV 2 Alexan GELOSO ECUIPMENT GZZZTR 1X 2 signal shifters, one with 807 final, other V4/102 brand new in box. Other gear push pull 807 modulator GELOSO handbooks, \$100 the lot. Mike VIGNCTO QTHR (03)

 PROP PITCH MOTOR \$100 or offer B40 receiver.
 SOB Hz-308 by \$100 or offer Ken VC3ACS OTHER 6030 502 5060

YAESU FT880R 6m all-mode 10W microphone and mobile mount. Manuals and circuit diagrams, VGC, \$440, Also WERNER WILLF 6m J-Pole an-tenna, \$80, both VGC, Peles\*VKSTYG GTHR (053) 68

 VAESU FT001 DM HF bowr 160-10m 100W all model filted all opinional filters 240 VAC or 12 VDC can model filted all opinional filters 240 VAC or 12 VDC can retemently FFO FC 902 dealers abused. SP59 00 Spt EC with handbooks and original packing, 3950 (0ALAW) till bowr 20-40B SS8 150W All valler until with softende spr, excellent SS8 guality Complete but not working. FF0.0cm and cruzil supplied, 2200 SS8 working, H7book and circuit supplied, \$200 SS linear hit comprising type 613 tube, 2 ceramic base 2 fit transformers and UN/3 plate modulation tran-former, \$200, Alan VKSADK QTHR (03) 337 7332.

 OCULINS POWER SUPPLY 426U-2 115VAC to 28VDC 100A, handbook, \$110. R1051A/B, R1051E, R39071, R390A, PTR170, ARCS1 handbooks, \$50 et. LSG11 sprall generator 1200Hz to \$50MHz, \$50. David ARC R35A VHF row 108 to 138MHz, \$50. David VIC3BFB (03) 587 1593.

COMPLETE DRAKE STATION comprising TR4C lacvr RV4C remote VFO, AC4 power supply, ASTATIC deak mic, manual, sparen new finals and other tubes.
 All equip in as-new cond. \$750 lot. Rob VK3JE (080) 37 1262 or (00) 584 5737.

COLLINS "S" line 75S3C receiver and 32S3A to miller, in EC. Rob VK3JE (080) 37 1262.

AWA CAR PHONE junior FM boy, comes with HT inverter. RX needs attention. With circuit diagram, \$20 one. VKSAJO QTHR (03) 872 3503. TSS20S KENWOOD bow, new lines, EC. \$500

one, VK3UI (03) 541 5458 BH. YAESU FT230R FM 2m mobile rig, 30W/3W output, 10 mems, plus scen. New quick release mounting bracket. Manual EC, \$325. Bob VK3BRF DTHR (03)

 COLLINS KWM2 txvr, compli with sep p/supply, EC, \$1000. Rob VK3JE (060) 37 1262 or (03) 584 5737. ® EIMAC SK600A air socket sets c/w SK606 chim-ney, anode clamp & mount bit, \$75 per set. Oly top quality parts to suit 4CX250/350 amp builders, incl fit

trans, blowers etc. VICSGY OTHR (03) 789 4363. PICOM ICTS 1 IFF borr and heavy duty power supply PS30 complete with 2KW key-down commercial grade linear amp. Mari cond. All workshop manuals. Brand new set of extra final tubes for linear A complete DX station at less then hell cost. Enquirise WIA Vic DN Office or AH VICSAV (1069) 98 7361

FOR SALE - OLD

 YAESU FT747GX S/N 80070367, GC, 8800.
 YAESU FT747GX S/N 80070367, GC, 8800. 7nm on (07) 261 1711

LARGE COLLECTION of new valves, mostly re-ceiving type, some to eg OOV03/20 send SSAE (suitable for two A4 sheets) for list. Will sell single or all MASSER OTHE (2015) set sale.

● 286 MOTHERBOARD, EGA card, true basic with manual & diete (unused), pystick & card (virtually unused). EPSON IMX80 compatible printer with 4 unused ribbons. Any reas offer Phil VK4BVM QTHR (076) 62 364.

HANDHELD ICO2A, with Nicad bettery and charger.
Also ICO2A with aliculine bettery pack. Headeet HS 10 with YOX unit to suit. All new. Ress offers to VK4AVR
 TOUR

cent VOX. and to sup. 4.4 mm. Type or firms to VM 64/10 CTHPR.

4. DECEMBED ESTATE VALANT R.P. ATTERNATOR OF CONTROL OF C 100-250/HE 2 TIOL BIRD with make mark 1 NM 100-250/HE 2 TIOL BIRD with make mark 1 NM 100-250/HE 2 TIOL BIRD with make mark 2 NM 25-250/HE 2 TIOL BIRD with make mark 100 W 50-150/HE 2 TIOL BIRD with make make 100 W 50-150/HE 2 TIOL BIRD with make make 100 HE 2 TIOL BIRD with make make 100 HE 2 TIOL BIRD with make make 1 TIOL BIRD with make 1 TIOL BIRD with make make 1 TIOL BIRD with make 1 TIOL BI 100-250MHz \$100. BIRD watt meter insert 1kW 100

4-WAY Toon power division YEP-DUT4 \$100.2 NWT-power divided 120Hz \$30.4 HWT power divided 120Hz \$30.5 KPBL+ 100Hz receiver mixed to 120Hz \$30.5 KPBL+ 100Hz receiver mixed 137.0 NWT-PUT4 Power from 13 4-WAY 70cm power divider YS-PD 074 \$100, 2-WAY

 SIEMENS teleprinter, modern SEQTG plus 2 spa record Stemens, lapse, paper, ribbons, manuals, complete system\$150. Ron VK4CRO QTHR (07) 390 7762

#### FOR SALE - SA

YAESU FT7 S/N8G080865 \$395. YAESU FT200 S/N 2N335294 \$260. Complete set valves for FT200 \$80. Valves QQE03/12 and QQE0320 (with sociasi) ofters. Barry VK58S 2THR (082) 95 3249.

♠ ICOM IC-R7000 25MHz to 1.3GHz with scanning antenna and RG-9 cable and connectors. With hand-book and receive modification. No gapst Exc cond \$1250 ono. (08) 278 3861 S/N 240843.

KLM KT34XA six-element tribancier \$1200 or offer VK5RN (08) 339 1210.

### FOR SALE - WA

 VHF/UHF Discone antenna. Stainless steel co struction. "N" connector termination. Ex-DoTC, EC \$80. Two x 30m rolls of 120-strand 8mm sq conductor. \$80. IWO X 30m to the or 120 strains straining someone. One red, one black, Ideal for high current power supplies and leads. \$35 per roll. Ranzo VK6ZAQ QTHR (09) 453 3054. Fax (09) 453 3175. ....................

### FOR SALE - TAS

 JRC JST-135 txvr, mint cond \$2000. NVA88 ex-sptr suit JRC \$140. KEN KP12A RF speech proces-sor, built-in AC supply \$110. YAESU SP102 axt splin \$105. Ahow all as new inchoxes, man, VK7AN (0) 27 1171

DAIWA ANTENNA TUNER cross needle WARC bends \$150 onc. MFJ TUNER PREAMP for SWL \$130. Ph (004) 31 3020.

#### WANTED - NSW

 KENWCCO model HC10 clock in reas cond. VK2AS QTHR (02) 416 7784. ● COLLINS 32S-3 or 32S-1 bx, 30S-1 amp, 62S-1

converter BUTTERNUT HIF-6 vertical, large collec-tions of CQ, QST and Ham Radio. VK2OE (046) 21 2228 evenings. KENWOOD SP230 speaker. Garnet VK2CGF QTHR (065) 51 0767.

DIAGRAM or manual for handheid Yaesu FT202 -all costs peid - eventuelly. Swep with FT202Mmanual. Bruno VK2BPO OTHR (02) 713 1831.

#### WANTED - VIC

 TRANSVERTER 2m or 70cm for Yassu FT901 series. Fred VK3APA QTHR.

 YO-901 CRO station monitor. Ph (03) 547 0910. COLLINS MECHANICAL FILTERS 1 500kHz con F SYM bandpass 3.1kHz b/width 1 500kHz carrier/F USB 2.4kHz BW1 tiltlo LSB styte Y preferred. Maurice VK3AZB OTHR (03) 890 8038.

COLLINS 75S3C receiver. Will pay good price. Rob VK3JE (060) 37 1262 or (03) 584 5737.

◆TYPE F COIL BOX 480-960kHz for HRO Br ▼ 1 YFE F COR, BDX 480-960HtL for HRO Receiver. Will buy or yearp fire spare type :JC 3.5-7.3MHz bendspreadable coil box. Also MN28 BENDIX Com-pass Receiver. Need not be a goer but tuning gang and coils must be unmodified and in GC. Harold VK3AFQ QTHR (03) 595 2414.

· COLLINS, Any pre-1960 Collins AM CW or SSB

equipment, esp RXs 75A-2, 75A-3, 51J-1, 51J-2, 55G-1 pre-selector, TXs 32V-1, 32V-2, 32V-3, KWS-1 any cond acceptable. Good price paid or trade for other Collins models. Also ARRL and Radio Handbooks, any edition to 1990, esp 1930/40/50 editions D104 mis, Vibroplex bus, Garry VKSSY CTRR (III) 789 4383

● ATTENTION chess players I Ever given a thought to chess. "on air"? We welcome players of any strength to join us on 3.659MHz 10:302 Tuesdays. We now cater for novices too on 3.569MHz 10:202 Tuesdays. 73. Damian VKSEHP.

### WANTED - OLD

■ BADLY NEED copy of operating instructions and circuit to restore 1959 GELOSO 222TR CW/AM 6 band transmitter. Also any information and circuit for MULLARD VALVEVOLTMETER type 755S/20.5V to 500V 7 ranges. Any help appreciated. VK4EF QTHR (07) 368 160V.

### WANTED - SA

◆ 70CM LINEAR AMP solid state, suitable for amateur satellite works. GsAs-FET pre-amp not a necessity but would consider if other types not available. Contact Peter VKSZPG reverse charges on (085) 55 2608 ntil 2130hrs it any day.

### WANTED - WA

 A British Electronics Service + Installation Tech (City & Guild Qualified), Holder of Australian Resi-SEEKS EMPLOYMENT IN OR AROUND PERTH

ADEA

Currently employed as Telecommunications Tech on local railway and worked on marine electronics including HF. VHF, UHF Comma & Radars, currently working on libre optic CTV & DATA Transmission Systems including PABX Programming + UHF Radio Also experienced in Audio Visual Distribution systems + Master Satellite Antenna Systems (TV).

Licensed Ameleur Radio Operator since 1981. Arriving in Australia July or August 1992. Please reply to: GOGUS S Felicia, 41 Rosedele Roed, Forrest Gate, LONDON E 7.8AU ENGLAND. .....................

Hamads

Please Note: If you are advertising items For Sale and Wanted please use a separate form for each. Include all details; ag Name, Address, Telephone Number (and STD code), on both forms. Please print copy for your Hartad as clearly as possible. \*Eight lines per issue free to all WIA members, ninth line for name and address Commercial rates apply for non-members. Please enclose a mailing label from this magazine with your Hamad.

\*Deceased Estates: The full Hamad will appear in AR, even if the ad is not fully radio \*Copy typed or in block letters to PO Box 300 ald South, Vic 3162, by the deadline as indicated on page 1 of each issue.

\*QTHR means address is correct as set out in the WIA current Call Book.

*WAA policy recommends that Hamade include the serial number of all equipment offered
für sale. *Please enclose a self addressed stamped envelope if an acknowledgement is required.
that the Hamad has been received. Ordinary Hamads submitted from members who are deemed to be in general electronics.

retail and wholesale distributive trades should be pertified as referring pary to private articles not being re-sold for merchandising purposes.

Conditions for commercial advertising are as follows: \$25.00 for four lines, plus \$2.25 per

line (or part thereof) Minimum charge — \$25.00 pre-payable.


Not for publication:

☐ Miscellaneous

☐ For Sale

☐ Wapted

Arkdress: .....

ı

.

٠

•

.............

. • i .

Call Sign:

. :

........

.

### Solution to Morseword No 63

Page 27

	1	ŧ	3	4	5	6	1		1	3
1	=	Ţ				-		-	-	
t			Ξ		•	-	•	-	-	-
3	•			•	=	-	•		-	٠
4				-	•	•	-	٠	-	
\$		Ξ	٠			-		-	•	•
ŧ	┍	-	-	-		•	-		-	٠
7	=				-	•	-	٠	-	٠
1		-				-	•	•	=	
3			•					-		-
ĸ	-				-			-		

Across: 1 dice; 2 fare; 3 satin; 4 stern; 5 rice; 6 attic; 7 darn; 8 ruin; 9 sift; 10 nines.
Down: 1 beret, 2 saki; 3 ruse; 4 vase; 5 fix; 6 old; 7 vate; 8 grin; 9 image; 10 heir.

#### TRADE PRACTICES ACT

It is impossible for us to ensure the advertisements submitted for publication compily with the Trade Practices Act 1974. Therelore advertisers and advertising agents will appreciate the abactute need for fremselves to ensure that, the provisions of the Act are compiled with strictify.

VICTORIAN CONSUMER AFFAIRS ACT All advertisers are advised that advertisements containing only a PO Box number as the address cannot be accepted without the addition of the business address of the boxholder or seller of the goods.

TYPESETTING:

Magazine Graphics PO Box 72 Caulield Sth, 3162

Teb(03) 417 5161

PRINTING: Industrial Printing

Richmond

MAIL DISTRIBUTION: R L Polk & Co Phy Ltd PO Box 140, Collingwood,

The opinions expressed in this publication do not necessarily reflect the official view of the WIA, and the WIA cannot be held responsible for incorrect information published.

### ADVERTISERS INDEX

### MAY 1992

		~ O 1 ° O C
Electronic	s World Dis	sposals 23
ICOM		OBC
Kenwood	Electronics	IFC
Stewart E	ectronics	53
WIA Book	shops	IBC
WIA NSW	Division C	ourse 11
WIA NSW	Division M	leeting 11
Trade HA	MADS	
M. Delahu	ntv	54
		54

RJ & US Imports .....54

Amateur Radio Action ......21

Dick Smith Electronics

### HOW TO JOIN THE WIA

Fill out the following form and send to:

The Membership Secretary Wireless Institute of Australia PO Box 300 Caulfield South, Vic 3162

I wish to obtain further information

about the WIA.

Mr. Mrs, Miss, Ms:

.....

Call Sign (if applicable):

State and Postcode: ....

### WIA Slow Morse Transmissions

VK2BWI nightly at 2000 local on 3550 kHz

VK2RCW Continuous on 3699kHz and 144.950MHz 5wpm, 8wpm, 12wpm

VK3RCW Continuous on 144.950MHz 5wpm, 10wpm

VK4WIT Monday at 0930 UTC on 3535kHz

VK4WCH Wednesday at 1000 UTC on 3535kHz

VK4AV Thursday at 0930 UTC on 3535kHz

VK4WIS Sunday at 0930 UTC on 3535kHz

VK5AWI Nightly at 1030 UTC on 3550 kHz

VK6RAP Nightly at 2000 local on 146.700MHz

VK6WIA Nightly (except Saturday) at 1200 UTC on 3.555MHz

## WIA Divisional Bookshops

The following items are available from your Division's Bookshop (see the WIA Division Directory on page 3 for the address of your Division)

ANTENNA REGINS	Ref	Price to Members		Ref	Price to Marabers
Ant. Compandium Vol 2 Software only	E0293	\$18.00	MORSE CODE (Contd)		
Antenna Compendium Vol 1 ARRI.	800163	219.80	Morse Code Taxes Set 1: 5-10 WPM - ARRL	BIC331	\$15.70
Antenna Compendium Vol 2 & Software ARRI.	63294	\$32.40	Morse Code Tapes Set 2: 10-15 WPM - ARRL	BX332	\$18.70
Antenna Compendium Vol 2 ARRL	83292	\$21.60	Morse Code Yapes Set 3: 15-22 WFM - ARRI,	BX333	\$15.70
Antenna Impedance Matching - ARRL - 1989	83757	\$27.00	Morse Code Tapes Set 4: 13-14 WPM - ARRI,	<b>600334</b>	\$18.70
Antenna Note Book W1FB - ARRIL - 1987 Antenna Pattern Worksheets Pist of 10 - ARRIL	8X179 8X211	\$18.00 \$5.40	Morse Tutor 5.25 inch IBM Dink	8X187	\$15.00
Antennas 2nd ed John Kraus - 1988	BX259	\$31.60	OPERATING		
Ream Antenna Handbook - New ED, 1990 Der	83215	\$23.00	Ampleor Radio Awards Book - RSGB	8X297	\$27.00
Easy Up Antennas	MF.CS8	\$35.30	CIXCC Corregation	80(345	\$10.60
HF Antennas - Mozon RSGB - 1988	<b>EX188</b>	\$27.90	FCC Rule Book A Guide to the FCC Regulations	800379	\$18.20
Novice Astenna Natebook DeMaw - ARRIL	EX162	\$14.40	Low Band DKing - John Devoiders Maidenhead Localor-Grid Atlas - ARRIL	8X195	\$18.00
Practical Wire Antennas - RSG8 Reflections - Software Sin disk	8X358	\$25.20	Operating Manual - ARRL - 1990 3rd Edition	8X192	\$27.00
Reflections - Transmission lines The Book - ARRIL - 1990	8X358	\$36.00	Operating Manual - RSGB - 1985 3rd Edition	800359	\$25.20
Simple Law Cost Wire Anlennas	83218	\$23.00	Passport to World Band Radio 1991	83/345	\$30.50
Smith Chart Expanded Scale PK of 10	8X903	\$5.90	Prefix Map - The World Flat on Heavy Paper	BX335	\$14.40
Smith Charts S/Scale 1 Set co-ord Img/Admir Pack of 10	8X900	\$5.90	Prefix Map of North America	EX235	\$7.20
Smith Charts Stand Scale 1 SET Co-or. PK of 10	8X900	\$5.90	Prefix Map of The World Short Wave Propagation Handbook	8X234 8X248	\$7.20
The Antenna Handbook - ARRL 1991, 16th edition The Truth About GS Antennas - Orr	9X370 8X219	\$35.00	The Complete DXer - Bob Locher - 1989	8X194	\$18.00
Transmission Line Transformers - ARRI, 2nd edition	BX219	\$23.00 \$36.00	Transmitter Hunting - TAB - 1987	80222	\$32.30
Vertical Antenna Handbook - Lee - 1990	83284	\$16.70		-	601.00
Yagi Antenna Dasign - ARRIL - 1986	8X164	\$27.00	PACKET RADIO RODES		
			AX 25 Link Layer Protocol - ARRL	BX178	\$14.40
ATV MODES			Computer Networking Con (Packet) No 5 1986 - ARRIL Computer Networking Con (Packet) No 6 1987 - ARRIL	8X167 8X168	\$18.00
The ATV Compendism - BATC	80270	\$15.80	Computer Networking Con (Packet) No 7 1985 - ARRI.	EX184	\$18.00
CALL ROOFS			Computer Networking Con (Packet) No 8 1989 - ARRL	BX295	\$21.50
Racio Call Book International	8X339	\$57.60	Computer Retworking Con (Packet) No 9 1990 - ARRL	BX360	\$21.50
Regio Cell Book North America	EX338	\$57.50	Computer Retworking Con (Packet) No 10 1991 - ARRIL	BX387	\$22.50
			Computer Networking Conf (Packet) 1-4 1982/5	BX168	\$32.40
FICTION CG Brings Danger - ARRL	83706		Gateway to Packet Radio 2nd edition - ARRI,	BX169	\$21.60
CQ Glocal Ship - ARRIL	8X296	\$9.40 \$9.40	Packel Radio Made Easy - Rogers	MFJ32	\$18.50
Orath Valley GTH - ARRI,	81/205	\$9.40	SATELLITE BOOKS		
Grand Carson OSO - ARRI	8X292	\$9.40	Oscar Salelite Review - Izoram	MF.231	\$15.30
Murder By DRM - ARRL	BX206	\$9.40	Salutine AMSAT-86A 5th Symposium 1987 - ARRIL	BX182	\$15.80
SCS At Midnight - ARRL	BX229	\$9.40	Saletile AMSAT-NA 6th Symposium - ARRL	800199	\$15.60
HANDROGOES			Saletite Anthology - ARRI,	BX180	\$14.40
ARRL Handbook - 1992	80069	\$47.60	Satellife Experimenters Mandbook 1990 edition Space Allegang — ARRS — 1990	BX177 BX299	\$36.00
Electronics Data Book - ARRL - 1988	EX201	\$21.50	Weather Saintite Handbook - AREL	BX324	\$36.00
Mobile Radio Handbook	MF.J33	\$22.50	Weather Satellite Handbook Softwore only - ARRI.	BX326	\$18.00
Motorola RF Device Cata - 2 Volumes	83447	\$23.00			
Radio Communication Handbook - RSGB	BX256	\$50.40	VWF/UNF/MICROWAVE		
Radio Data Reference Book - RSGB - 1985 Radio Handbook 23rd addion - BM Crr	BX224	\$32.40	All About Vriff Amuleur Radio - Orr - 1968 Microwave Handbook Vol 1 - RSGS - 1969	SX216 BX318	\$23.00
Radio Theory For Amateur Operators - Swainston - 1981	BX255	\$38.70	Microwave Update Con. 1967 - ARRIL	8X174	215.80
The state of the s	BAZES	\$06.70	Microwave Update Con. 1968 - ARRI.	BX183	\$15.80
HILLIONA			Microwave Update Con. 1989 - ARRL	BX321	\$21.60
200 Meters and Down 1936 - ARRL	BX198	\$7.20	Mid Atlantic VHF Con. October 1987 - ARRI,	8X175	\$15.80
50 Years of the ARRL - 1981	BX196 BX363	\$7.20	RSG8 Microwave Handbook Vol 12	EX437	\$63.00
Big Ear - Autobiography Of John Kraus WBJK - 1976 Golden Classics of Yesterday - Ingram	MF,I30	\$19.40	Spread Spectrum Source Book - ARRL - 1981	830365	\$36.00
Spark to Space - AHEL 75th Anniversary - 1990	80010	\$36.00	SRF Compendium Part 1 & 2 Vol 1 URF Compendium Part 3 & 4 Vol 2	8X250 8X251	\$67.50
The state of the s	and to	900.00	UHF Compendium Part 5 German Only	RX354	\$50.20
WITHTERENCE BOOKS			UHF/Microwave Experimenters Manual - ARRL - 1990	BX325	\$35.00
Interference Handbook - Nelson - 1988	BX181	\$23.00	UHF/Microwave Experimenters Software Sinch Disk - ARRL	BX327	\$18.00
Radio Frequency Interference - ARRIL	EX146	\$13.50	WWF 21st Central States Con. 1987 - ARRE	BX172	\$15.80
MIRCELLANFOUS			VWF 22nd Central States Cor. 1958 - ARRIL	BX173	\$15.80
Attildon Ferrite Complete Data Book	8244	\$9.00	VWF 23rd Central States Con. 1989 - ARRS.	BX285	\$15.80
Design Notebook W1FR - ARRL	800357	\$18.00	VHF 24th Central States Con. 1990 - ARRL	BX322	\$21.60
Ham Radio Communications Circuit Files	MFJ37	\$22.50	199F 25th Central States Conference 1991 - ARRI, 199F819F Manual - RSGB	BX438	\$21.60
Help For New Harris Dalidaw - ARRL	EXCION	\$15.00		BYCSP1	\$43.20
Hirls and Kinks 12th edition - ARRIL Novice Notes. The Book - ARRIL OST	BX330	\$14.40	WIA MEMBERS SUNDRIES		
ORP Classics - ARRIL OST	BX298	\$10.90	Log Book Covers		\$16.00
GRP Note Book - Here 2nd addition ARRI.	B0023	\$18.00	WIA Eadge - Diamond		34.00
Racko Astronomy 2nd edition - John B Kraus	BX752	\$71.90	WIA Badge - Diamond With Call Sign Space WIA Badge - Traditional Blue		\$4.00 \$4.00
Radio Auroras RSGB New 1991	E00381	\$27.00	WIA Radge - Traditional Red		\$4.00
Radio Buyers Source Book - ARPL - 1981	80377	\$27.00	WIA Car Window Stickers		\$0.50
Shortwave Receivers Past and Present	10253	\$19.80	WIA Tape - Sounds of Amaleur Radio		\$7.00
Solid State Design - DeMane ARRIL	BX171	\$21.60	WIA PUBLICATIONS		
MERITE COSE			WAR PUBLICATIONS Australian Radio Arnateur Call Book - 1992		\$10.00
	80028	\$36.00	Eand Plant Sockist		\$2.50
Advanced Morse Tutor - 3.5 inch Disk					
Advances Morse Tutor - 3.5 Inch Disk Advances Morse Tutor - 5.25 Inch Disk Morse Code 8 Taxes Novice Code Course - Gordon West	BX326 BX273	\$36.00	WIA Log Book - Horizontal or Vertical Format WIA Novice Study Guide		\$5.00 \$1.50

Not all liens above are available from all Diricions (and some in available from the Enecutive Office). If the lien in carried by your Divisional Bookshop, but it not in stock, your order will be taken and filled as soon as practicable. All prices are for WIA members only—postage and packing, if applicable, in exire.

# icom puts "intelligent" transceiver power in your hands



he future is yours today, in the brilliant new loom range of handheld transceivers, that put real power in your hands.

Newly-developed AI (artificial intelligence) features in the amusing IC-PAAT and IC-PAAT make for easy operation. The "one-touch" AI button tremembers previously used functions for simple repeat action, while a built-in test evaluates your knowledge, customising the unit to your ability. With 100 memory channels, optional 5W power, high speed scan and 24 hour system clock, this many features have never appeared before in such a titto value.

For deal band FM Tinnectiving the IC-WZA gives you simultaneous dual band receiving in the smallest unit in its class. 3-way tuning system, 60 memory channels, 2 call channels are just a start. Optional pager and code squelch functions allow selective calling to individuals or googse. Completely luddependent speaker jacks, volume and squelch controls are some more of the features in this islim unit that fits comformably in the rotum of your hand.

And for the very best in 2M and 70CM handheld transceivers, offering you full 50-905 Mrx wideband receiving, the IC-2SRA and IC-4SRA give you the words. Widen the borders of general coverage receive with VHF and UHF frequencies plus simultaneous dual band receiving. Rugged, splash resistant handhelds, with dual controls, speaker jacks and antenna, these units go beyond the average amateur's needs, with features like 24 hour clock, CnyOH inter, udwanced scan functions and total recall capability.

Whatever your transceiving needs, ICOM can give you the future, right now.

For further information call free on (008) 338 915 or write to Reply Paid 1009 Icom Australia Pty Ltd P.O. Box 1162 Windsor Victoria 3181 Telephone (03) 529 7582 A.C.N. 006 092 575

BOOM Australia's warmency is only applicable to products purchased from their maherized Australian Deslers.